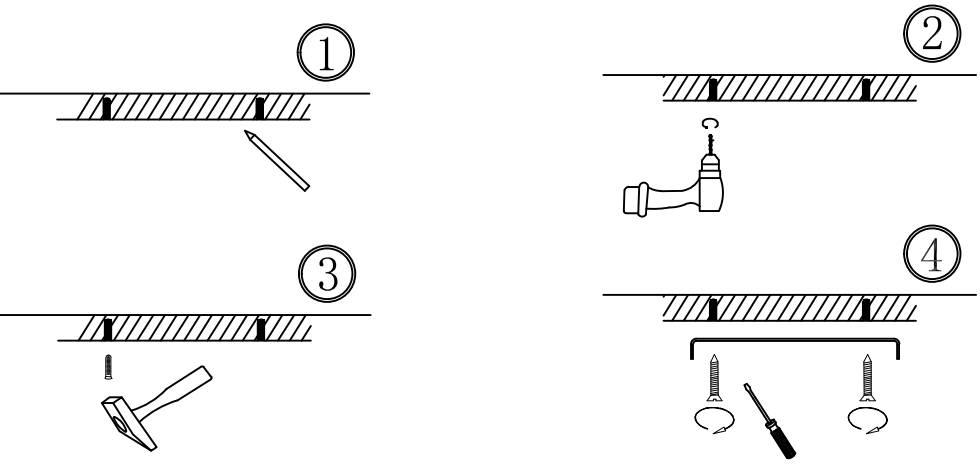
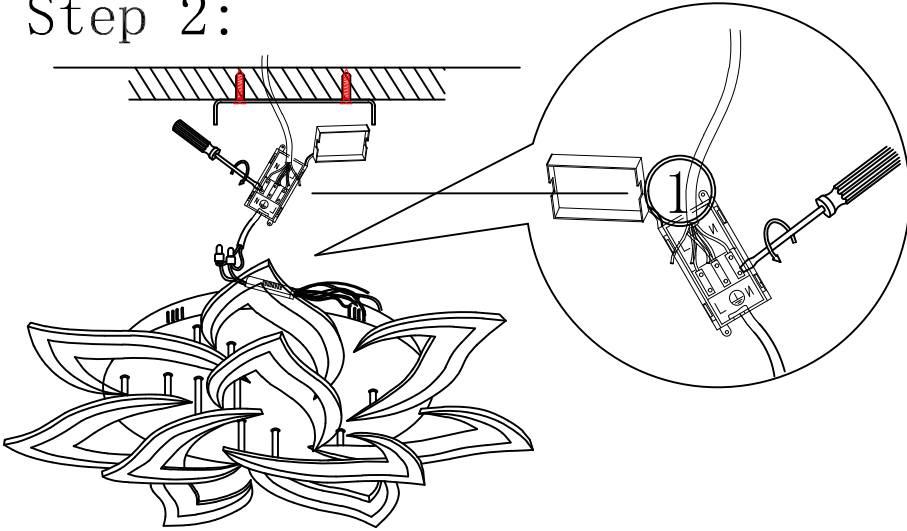
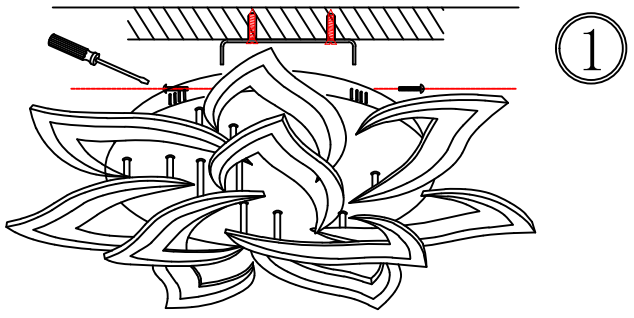
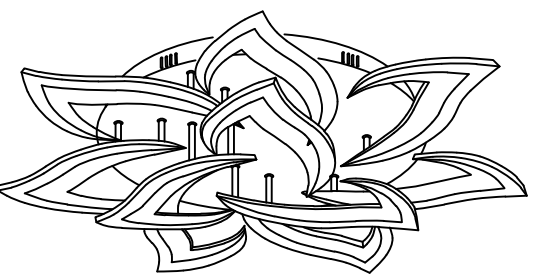
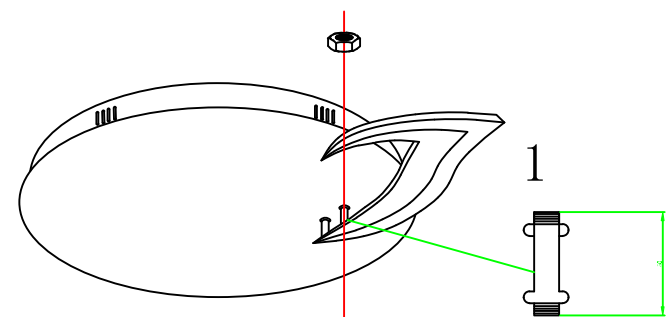
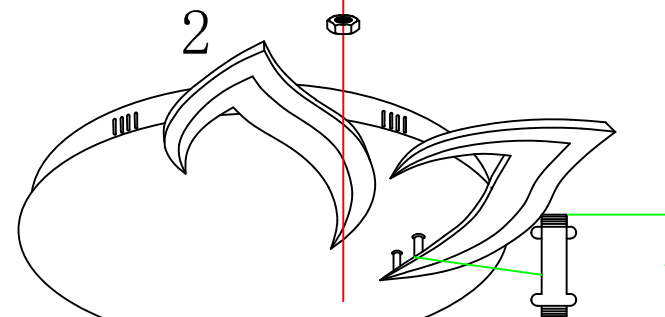
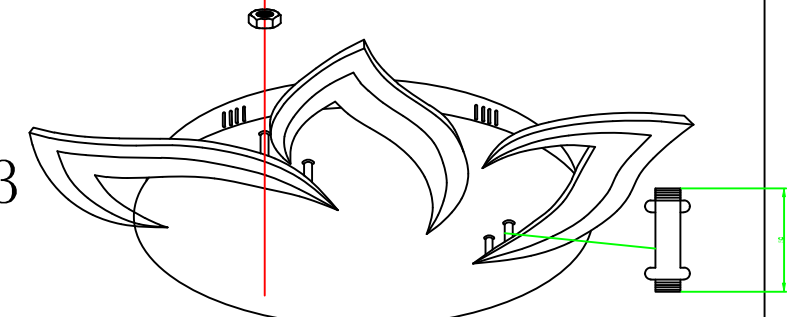
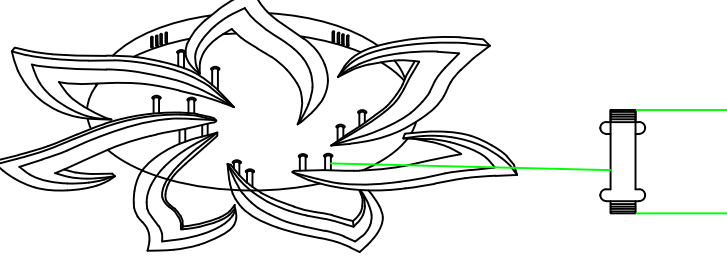
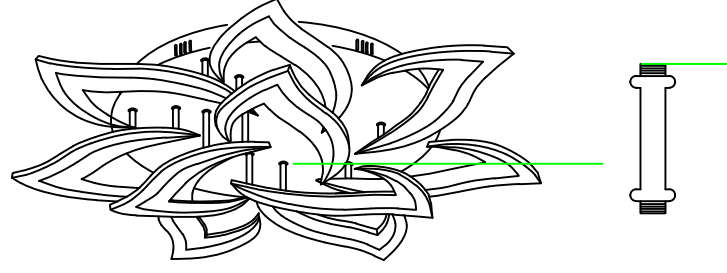
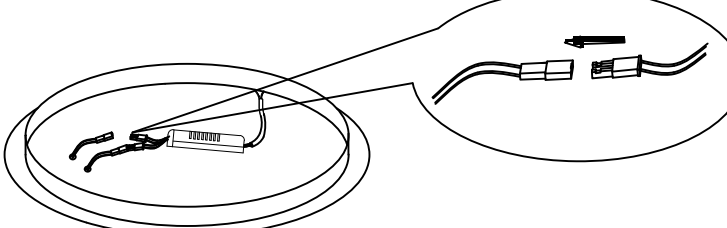


<div>Installation Step 1:</div> <div></div> <div><ol style="list-style-type: none"><li>During installation, take out the hanging board and align it with the corresponding position of the ceiling. Use a pen to draw the punching position (Figure 1)</li><li>Then use an electric drill to drill a hole at the marked position (Figure 2)</li><li>Use the hammer to align the corresponding holes to fix the plastic glue drop (Figure 3)</li><li>Fix the lamp hanging plate with self-tapping screws (Figure 4)</li></ol></div>		<div>Installation Step 2:</div> <div></div> <div><ol style="list-style-type: none"><li>Lift the lamp and connect the power cord of the lamp with the household (110V) wire reserved for the ceiling with a screwdriver (Figure 1)</li></ol></div>
<div>Installation Step 3:</div> <div></div> <div><ol style="list-style-type: none"><li>After connecting the power cord, fix the lamp body and the hanging board with screws (Figure 1)</li></ol></div>		<div>Installation Step 4:</div> <div></div>

Assembly Diagram		
Schematic diagram of assembly and fixing of lamp holder 1	Schematic diagram of assembly and fixing of lamp holder 2	Schematic diagram of assembly and fixing of lamp holder 3
<div></div> <div><ol style="list-style-type: none"><li>First take out the screw accessories from the accessory bag.</li><li>Then tighten the head tube of L50MM and the lamp cap to fix it.</li><li>Then fix the lamp head 1 on the chassis with screws.</li></ol></div>	<div></div> <div><ol style="list-style-type: none"><li>As shown in the picture, put the 50mm long bracket on the lamp panel</li><li>As shown in the picture, put the 50mm long bracket on the lamp panel</li></ol></div>	<div></div> <div><ol style="list-style-type: none"><li>As shown in the picture, put the 50mm long bracket on the lamp panel</li></ol></div>
4.5.6.7 Assembly and fixing diagram	8.9.10 Assembly and fixing diagram	Plug all plugs first
<div></div> <div><ol style="list-style-type: none"><li>As shown in the picture, put the 50mm long bracket on the lamp panel</li></ol></div> <div>Note: The length of 7 lamp holder support rods on the outer layer is 50MM</div>	<div></div> <div><ol style="list-style-type: none"><li>Tighten the head tube of L70MM and the lamp cap to fix it.</li><li>Then fix the 8.9.10 frame to the chassis with screws in the same way.</li></ol></div> <div>Note: The length of 3 lamp holder support rods on the second floor is 70MM</div>	<div></div> <div><ol style="list-style-type: none"><li>Plug all the plugs on the drive first.</li></ol></div>