




# ASSEMBLY INSTRUCTION

Use the following steps to assemble your floor lamp:

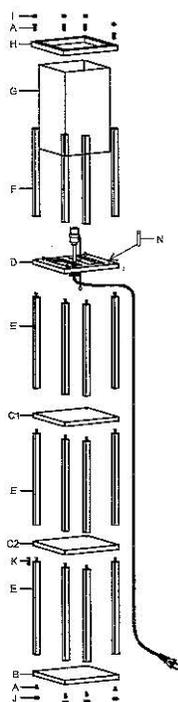


## PARTS

A. Screw	8pcs
B. Lamp Base (Shelf 3 Board)	1pc
C1. Shelf 1 Board	1pc
C2. Shelf 2 Board	1pc
D. Socket Board	1pc
E. Long Pole	12pcs
F. Short Pole	4pcs
G. Lamp Shade	1pc
H. Top Frame	1pc
I. Screw Cover	4pcs
J. Round Felt	4pcs
K. Thread-Pipe	12pcs
L. Zip-Ties	3pcs
N. Wood Nut	4pcs

THIS INSTRUCTION BOOKLET CONTAINS IMPORTANT SAFETY INFORMATION. PLEASE READ AND KEEP FOR FUTURE REFERENCE.

- (1) Carefully remove all parts from the box and remove all plastic coverings.
- (2) Insert thread-pipe (K) into the screw-holes at all long pole (E)  
Noted: only insert the thread-pipe (K) into One Side of long pole - see Diagram 1
- (3) Insert 4pcs of screw (A) into the screw-holes on lamp base (B), tighten the screws (A) with 4 pcs of Long Pole (E) by screwdriver, then cover the screw-holes by round felt (J). - see Diagram 3
- (4) Putting the lamp base in upright position,
- (5) Place shelf 2 board (C2) on top of long pole (E) with the holes over the threads
- (6) Place other 4pcs of long pole (E) and turn clockwise until it is secured
- (7) Place shelf 1 board (C1) and repeat step (6)
- (8) Place the socket board (D) on top of the long pole (E) with the holes over the threads  
\*Refer to Diagram 2 for socket assembly
- (9) Hold the short pole (F) and turn clockwise until it is secured. Repeat for the other 3 poles
- (10) Insert wood nut (N) onto small-holes on the socket board (D). Insert the lamp shade (G) onto socket board (D) and holding shade position by 4 wood nut (N).
- (11) Cover the top frame (H) onto the lamp shade (G) and tighten it onto the short poles (F) with screws (A) from the top by a screwdriver (Not Include). And place screw cover (I) to cover the screw holes
- (12) Optional attached the cord with long poles (E) by using supplied Zip Ties (L)




Refer to Diagram 2:

- 1) Insert socket pipe into center hole of Socket Board (D). Tighten up by turning Butterfly Nut clockwise.

Shelf Loading Note (Refer to Diagram 3):

- Maximum Loading for Shelf 1: Not Exceed 1 Lb
- Maximum Loading for Shelf 2: Not Exceed 2 Lbs
- Maximum Loading for Shelf 3: Not Exceed 2 Lbs

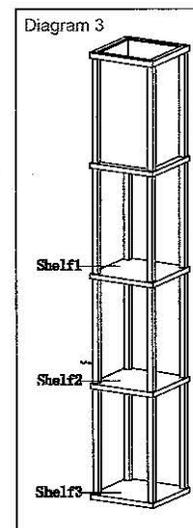

**CAUTION: TO REDUCE RISK OF FIRE.**  
USE **MAX 100-WATT TYPE A** LAMP  
OR USE **MAXIMUM 16-WATT SELF**  
**-BALLASTED LED LAMP OR LAMP ADAPTER.**

## CAUTION : IMPORTANT SAFETY INSTRUCTIONS

This portable lamp has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless the plug can be fully inserted. Do not alter the plug.