

ITEM #: RV-WB7846-3

Kira
Home

IMPORTANT SAFETY INSTRUCTIONS

- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.
Note: Some types of fuses must be unscrewed to shut the power off.
- If you are unclear as to how to proceed, please consult a licensed electrician.

UNPACK THE FIXTURE: Check the contents of the box. Box should contain all items on the parts diagram.



For any replacement parts or installation issues, please Contact Us!


Email: help@kira-home.com

Facebook/Instagram: @KiraHomeDecor

Phone: 888.208.2085

INSTALLATION INSTRUCTIONS

1. Measure the fixture's Backplate (D) width with measuring tape. Adjust Backplate Screws (E) on Mounting Plate (A) to the width of measured Backplate (D) plus 1/4" to allow them to protrude through Backplate (D) during installation. Lock Backplate Screws (E) in place with the hex nuts.
Note: Mounting Plate (A) should already be attached to Backplate (D).
2. Secure Mounting Plate (A) to the junction box (not included) using Mounting Screws (B) provided. Ensure Mounting Plate (A) is positioned with Backplate Screws (E) pointing away from the junction box.
3. Place Backplate (D) against the wall by inserting Backplate Screws (E) through the appropriate holes located on Backplate (D). Adjust Backplate Screws (E) and hex nuts until 1/4" of the threaded portion is visible. Remove the fixture from the wall and set it aside.
Note: If 1/4" of Backplate Screws (E) are not visible, remove Backplate (D) and re-adjust Backplate Screws (E) to proper length and lock them in place with the hex nuts.
4. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (C).

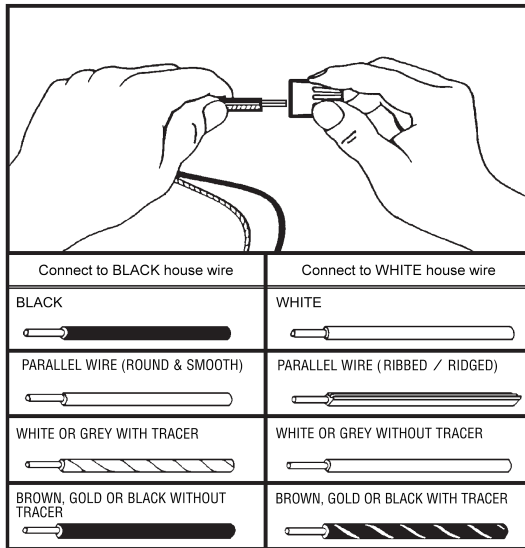

- A.** Connect the ground wire (bare copper or green) from your fixture to the:
- 1) ground wire in the junction box, or
 - 2) ground screw in the junction box
- B.** Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/gray with tracer, brown/gold without tracer).
- C.** Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/gray without tracer, brown/gold with tracer).

5. Place all wires and Wire Connectors (C) back into the junction box.

6. Place Backplate (D) against the wall, ensuring Backplate Screws (E) are protruding through the holes in Backplate (D). Secure the fixture in place to Mounting Plate (A) with Decorative Caps (F).

Note: If the fixture does not sit flush against the ceiling, remove the fixture and readjust Backplate Screws (E) and hex nuts.

7. Secure Shades (H) to Sockets (G) with Socket Rings (I).

Note: Socket Rings (I) should already be attached to Sockets (G). Remove Socket Rings (I) prior to installing Shades (H).

8. Install light bulbs (not included) into Sockets (G).

Enjoy your new fixture!

Kira Home

ITEM #: RV-WB7846-3 - PARTS DIAGRAM

HELPFUL TOOLS: Safety Goggles, Screwdriver, Wire Cutter/Stripper, Ladder, Measuring Tape

