

## Assembly Instructions

### 2-Light Rectangle Pendant, 3-Light Rectangle Pendant 4-Light Rectangle Pendant, 4-Light Square Pendant

**Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.**

This light should be installed by a licensed electrician


#### LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Attach the mounting plate to the outlet box, secure with outlet box screws.
3. Determine the height at which the fixture is to be hung. Unscrew the cord lock screw, set the adjustable cord to the desired length and, if necessary, cut cord to length plus six inches. Tighten the cord lock screw by screw driver to prevent slippage. (Fig. 1)
4. Adjust the steel cables to match the length of the power cord.
5. Adjust the cable stops so they are 12" from the canopy by loosening the screws and sliding the stop along the cable. Tighten the screws to set.
6. Make appropriate electrical connections using wire nuts:
  - a. Connect the fixture's live wire (black) to the live outlet box wire.
  - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
  - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
  - d. Carefully place connections in outlet box.
7. Attach the canopy to the mounting plate, secure with countersunk screws.
8. Lower the glass onto the frame from the top, so the glass rib sits on the frame.
9. Gently squeeze in on the arms until they fit inside the top of the glass. Push the socket down until the ends of the arms hook into the groove on the glass. (Fig.2)
10. Slide the cable spreader to desired position by using the provided Allen key to loosen the set screw. Secure by tightening the set screw.
10. Adjust the steel cable lengths to level the fixture, making sure the weight of the glass is supported by the steel cables, not the arms.
11. Install 60w medium base bulb. (not included)
12. Restore power to the fixture.

#### Steel cable adjustment instructions:



To shorten the cable:

Just push the cable up, cable will be locked automatically.



To lengthen the cable:

Lift up on the cable and push up on the lock. While keeping the lock depressed, lower the cable to the desired length. Release the lock to set.

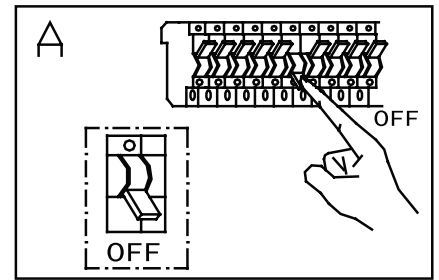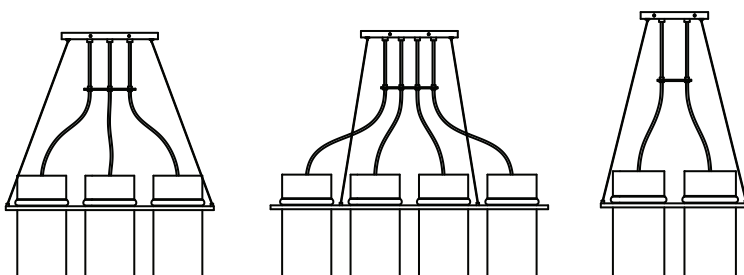

#### CARE INSTRUCTIONS

Dusting — Use a clean, dry cloth.

Cleaning — To protect the finish, avoid any harsh abrasives or chemicals.

