



Model:48499

①

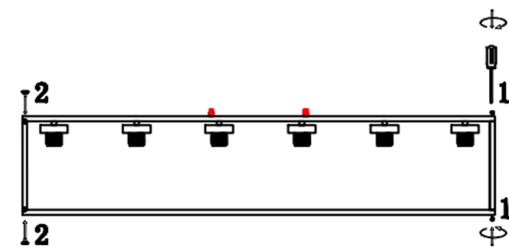


1.①Attach lamp body A and lamp body B to the connecting rod with round head screws.
②Press the pipe plugs into the screw hole.

②

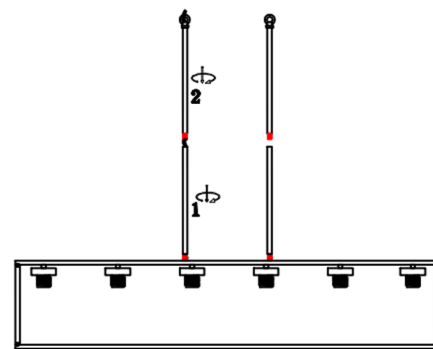


2.Thread the wires through the metal tube and screw the metal tube to the top of the lamp body A in sequence.

③

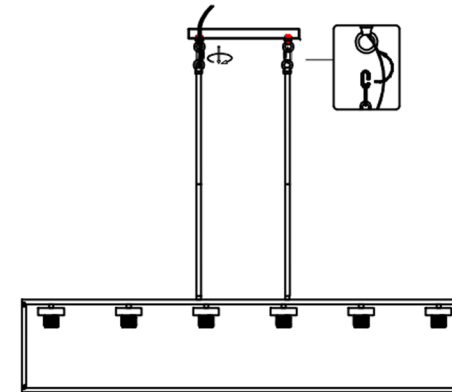


3.Pass the wires through the lamp base and connect the lamp body and the lamp base together with the quick link.

④

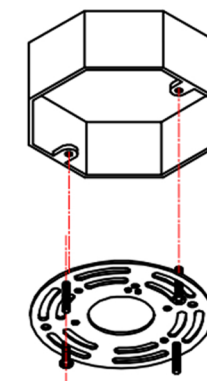


4.Use 2 long screws to install the hanging board in the junction box on the ceiling.

⑤

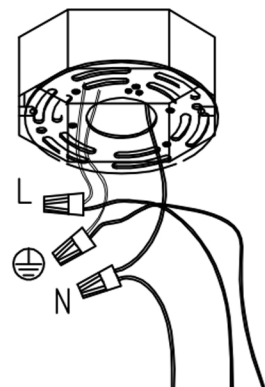


5.Wire the device by matching the colors of the wires. A total of 3 wires: Live wire, neutral wire, and ground wire. Cover the connection by tightening the wiring cap. To avoid electric shock, please do not let the copper wire expose.

⑥

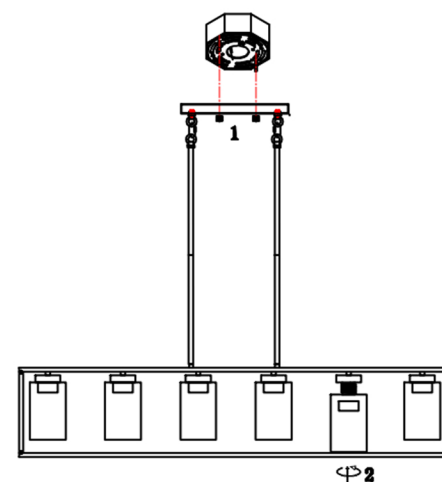

6.①Install the lamp body on the hanging board and tighten them with the nuts.
②Screw on the glass lampshade.

⑦

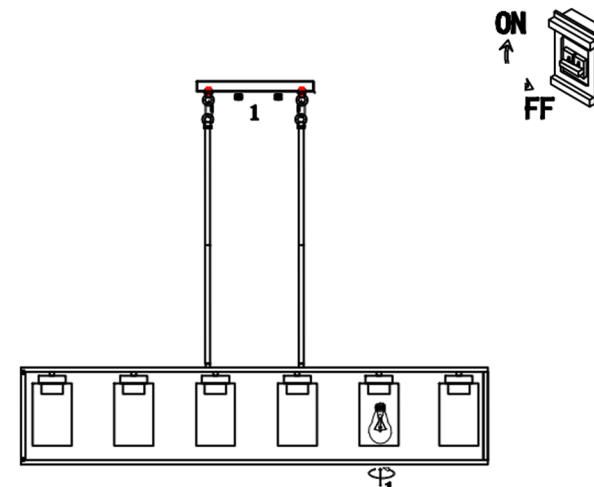

7.①Install the bulbs . (Bulbs not included)
②Close the switch to check that the lamp illuminates correctly.

1.  Long screws 4PCS

2.  Hanging board 1PCS

3.  Wiring caps 3PCS

4.  Lamp base 1PCS


5.  Quick link 2PCS

6.  Metal tube B 2PCS

7.  Metal tube A 10PCS

8.  Pipe Plugs 8PCS

9.  Lamp body A 1PCS

10.  Lamp body B 1PCS

11.  Connecting rod 4PCS

12.  Glass lampshade 6PCS