


edishinē

Chandelier

SKU: HHPL27A
[Instruction Manual]

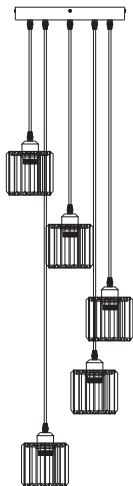

Please pay attention to the warning signs
Read the instructions with caution before operating
and keep it properly

V50806

Warning:

Risk of fire. Min 167°F/75°C supply conductors. Consult a qualified electrician to ensure correct installation. Before installation, please turn off the main power of the circuit breaker to prevent possible electric shock.

Installation Instructions

FIG.1. Turn the wall switch to the "OFF" position. Depending on which type of fuse box in your home:

FIG.2. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or turn off the individual switch that supplies power to where the fixture will be installed.

OR

FIG.3. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or unscrew the fuse that supplies power to where the fixture will be installed.




FIG.1 WALL SWITCH




FIG.2 BREAKER PANEL












FIG.3 FUSE BOX

PACKING LIST

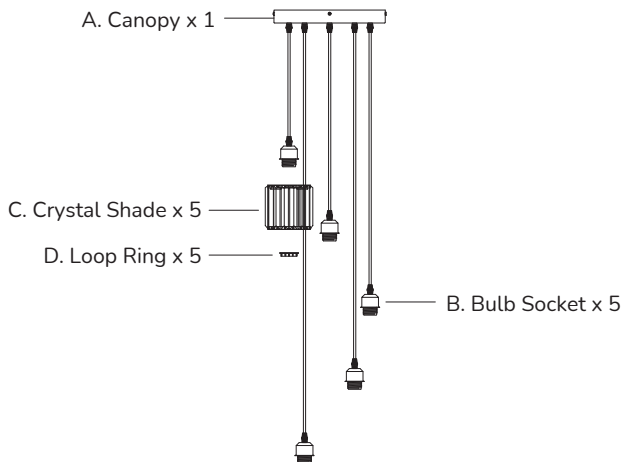


1. Loop Ring (D) have been pre-installed on Bulb Socket (B).

INSTALLATION KIT

AA	x1	BB	x1	CC	x4		
 Mounting Bracket		 Ground Screw		 Mounting Bracket Screw			
DD	x3	EE	x2	FF	x4	GG	x4
 Knurled Nut		 Outlet Box Screw		 Plastic Ancho		 Wood Screw	

1. Ground Screw (BB), Mounting Bracket Screw (CC) have been pre-installed on Mounting Bracket (AA).

INSTALLATION

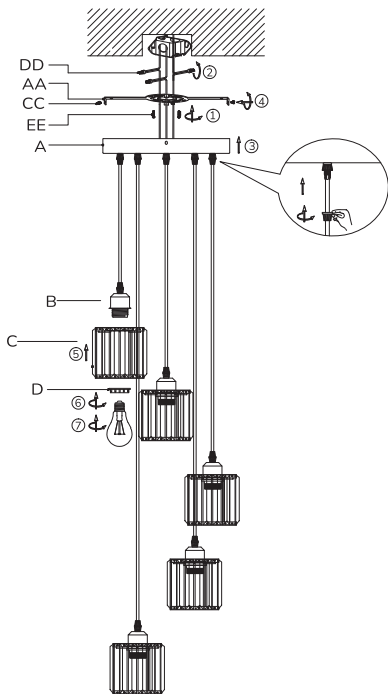

Step 1:

1. Loosen the Mounting Bracket Screw (CC) from Canopy (A), and take out the Mounting Bracket (AA).
2. Take off the screws from the outlet box, and secure the Mounting Bracket (AA) onto the box with the screws taken off or Outlet Box Screw (EE).

Step 2:

1. Wrap the ground wire from the outlet box around the Ground Screw (BB) on the Mounting Bracket (AA), and then connect the ground wire from the fixture to the ground wire from the outlet box.

2. Connect the wires from the fixture to the house supply wires, neutral wire (white) to neutral wire, and hot wire (black) to hot wire.

3. Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other side.

Septs 3:

Fix Canopy (A) to Mounting Bracket (AA) using Mounting Bracket Screw (CC).

Septs 4:

Put Crystal Shade (C) into Bulb Socket (B) and fix it with Loop Ring (D) rotation.

Septs 5:

E26 Bulbs X 5

(Max 60W each, not included)

Tips:

Adjust the length of the wire by rotating the nut on the outlet as shown in the picture.

Specifications

- Input Voltage: 120VAC 60Hz
- Max.Load Power: incandescent Bulb 60W
- Socket Type: Standard Medium E26

One Year Limited Warranty

Supported by our professional R&D team and QC team, we provide One Year Warranty for materials and workmanship from the purchase date.

Please note that the warranty does not cover damage caused by personal misuse or improper installation.

Please attach your Order ID and Name so that our dedicated customer service team can help you better.



Made in China