

-
- 11.** Attach the GROUND WIRE from the fixture to the GROUND JUNCTION BOX WIRE from the ceiling outlet junction box (j-box), usually green insulation or bare wire. Fasten each together with a plastic Wire Connector (G) by twisting the connector in a clockwise direction and wrap the connection with electrical tape. Be sure that no wire strands are exposed. If your outlet junction box DOES NOT have a GROUND WIRE, be sure to insert the green GROUND SCREW (D) into the Mounting Plate (B), marked as "GND," facing downward, and wrap the bare ground wire from the fixture around the green GROUND SCREW (D). Tighten the screw to clamp the ground wire between the ground screw head and the crossbar. **IT IS IMPERATIVE THAT THE JUNCTION BOX IN YOUR HOME BE PROPERLY GROUNDED!**
- 12.** Connect the NEUTRAL FIXTURE WIRE to the NEUTRAL JUNCTION BOX WIRE (usually white insulation). Fasten each together with a plastic Wire Connector (G) by twisting the connector in a clockwise direction and wrap the connection with electrical tape. Be sure that no wire strands are exposed.
- 13.** Connect the HOT FIXTURE WIRE to the HOT JUNCTION BOX WIRE (usually black insulation). Fasten each together with a plastic Wire Connector (G) by twisting the connector in a clockwise direction and wrap the connection with electrical tape. Be sure that no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- 14.** Check the wiring connections and if all looks good, gently tuck the wire connections neatly into the ceiling outlet junction box.
- 15.** Align the holes in the Canopy (H) with the Collar Loops (E) on the Mounting Plate (B) and slide the Canopy (H) over the Collar Loops (E) until it is flushed to the ceiling. Secure the Canopy (H) in place with Threaded Rings (J).
- 16.** Insert FOUR (4) 25-Watt maximum Type B Candelabra base incandescent light bulbs (not included) or FOUR (4) 6-Watt compact fluorescent light bulbs (not included) or FOUR (4) 4-Watt LED light bulbs (not included) into the sockets. **Do not exceed specified wattage.**
- 17.** Place the Glass Shade (L) over the Metal Cap (N), secured by the clips located at the base of the Metal Cap (N).
- 18.** Restore power to ceiling outlet junction box and test fixture.
- 19.** Installation is complete.
-

CARE INSTRUCTIONS


- ✓ Wipe clean with a soft, dry cloth or static duster.
 - ✓ Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the chandelier's finish.
-

PARTS ENCLOSED

		QTY
A	Plastic Anchors	6
B	Mounting Plate	1
C	Reinforcing Wood Screws	6
D	Ground Screw	1
E	Collar Loop	2
F	Mounting Screws	2
G	Wire Connectors	3
H	Canopy	1
I	Quick Links	2
J	Threaded Ring	2
K	Chain	2
L	Glass Shade	4
M	Fixture Loop	2
N	Metal Cap	4

WARNINGS

- ✓ Before installing the chandelier, make sure the power to the circuit is turned off at the main fuse box/circuit breaker utility box.
- ✓ To reduce the risk of fire, electrical shock or personal injury, always turn off the chandelier and allow it to cool prior to replacing light bulbs.
- ✓ Do not touch the bulbs when the chandelier is turned on. Do not look directly at lit bulb.
- ✓ Keep flammable materials away from lit bulb.

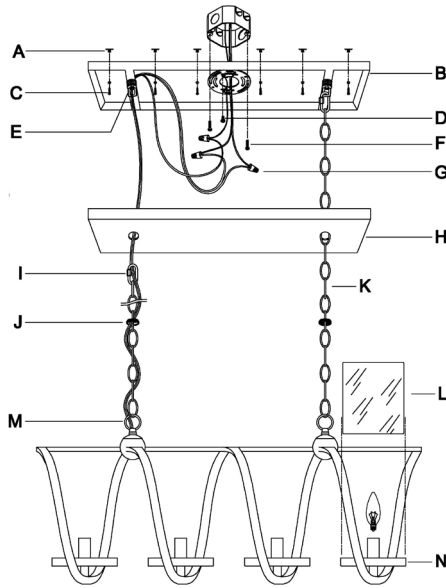

SAFETY FIRST

- ✓ This chandelier is meant for indoor use, **dry locations only**.
- ✓ Do not use the electric cord to support the weight of the chandelier.
- ✓ These instructions are provided for your safety. It is important that they are read carefully and completely before beginning the installation of this lighting fixture.
- ✓ For your safety, it is strongly recommended that **two** people install the lighting fixture.
- ✓ **This product must be installed in accordance with the applicable installation codes by a person familiar with the construction and operation of the product and the hazards involved.**
- ✓ Save these instructions.

ASSEMBLY INSTRUCTIONS

Remove all parts and hardware from the box along with any plastic protective packaging. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

1. **Shut off the main electrical supply from the main fuse box/circuit breaker.**
2. Carefully unpack all the fixture parts and hardware and lay these out on a clear work-space.
3. Determine the lighting fixture suspension length from the ceiling for the product installation, allowing the extra cord length for the outlet junction box wire connections as noted below.
4. The chain length can be shortened from the side of the Quick Links (I). Remove the Quick Link (I) by rotating the side hex nut on its side counter-clockwise until the opening is large enough to remove it from the end of the Chain (K). Re-attach the Quick Links (I) to the desired length of the Chain (K) by inserting the chain link through the opening of the Quick Links (I) and closing it by rotating the hex nut on its side clockwise. Remove the extra Chain (K) using pliers to separate a link along a split-line formed in each link. Use two pairs of pliers to gently pry the link apart so that space is created large enough for the link to be removed from the remaining Chain (K). One chain link must be attached to the Collar Loop (E), and the other chain link must be securely attached to Fixture Loop (M) at the top of the light fixture.
5. Lace the 2-wire power cord and bare copper ground wires through alternating chain links from the chandelier all the way up through the Canopy (H).
6. Holding the Mounting Plate (B) over the junction box, mark the location for Plastic

Anchors (A) on the ceiling. Be sure to check for level before installing Plastic Anchors (A).

7. Mount the Plastic Anchors (A) to the ceiling. Secure the Mounting Plate (B) onto the junction box, using Mounting Screws (F) and using the Reinforcing Wood Screws (C) to tighten the Mounting Plate (B) to the Plastic Anchors (A).
8. Thread the Collar Loops (E) onto the threaded nipples attached to the Mounting Plate (B) by turning these clockwise until securely fastened. Slide the Threaded Rings (J) and the Canopy (H) over the Quick Links (I) and the Chains (K). Raise the fixture close to the Mounting Plate (B) and attach the Quick Links (I) to the Collar Loops (E). Close the Collar Loops (E). Feed the power supply cord and ground wire through the bottom opening of the Collar Loop (E) and the nipple. Pull the power supply cord and ground wire to the outlet/junction. It should extend 6" beyond the outlet/junction box. Cut the excess power supply cord and ground wire.
9. Carefully inspect the chandelier fixture wires. The NEUTRAL FIXTURE WIRE has FINE LONGITUDINAL RIDGES running along its length. The HOT FIXTURE WIRE is SMOOTH, and the bare copper wire is the GROUND WIRE. If you have any doubt and cannot identify the power-supply wires with confidence, then we recommend that you ask an electrician and that you not continue with the installation.
10. Gently pull the existing wire down from the ceiling junction box and allow wires to hang. The HOT or LIVE wire is usually black. The NEUTRAL wire is usually white. Check to see if there is a ground wire that is usually green or green with a yellow stripe or exposed copper metal wire. If needed, use a pair of wire strippers to remove about 1/2 inches of insulation from each wire.