



# Archer® | K-9395

60" x 60" alcove shower base, center drain

## Features

- Low-threshold design for easy entry and exit
- Covered drain with removable cover
- Single threshold for alcove installation
- Coordinates with other products in the Archer collection



## Available Colors/Finishes

*Color tiles intended for reference only.*

|    |          |
|----|----------|
| 0  | White    |
| 96 | Biscuit  |
| NY | Dune     |
| 95 | Ice Grey |



## Codes/Standards

CSA B45.5/IAPMO Z124  
 ASTM E162  
 ASTM E662

## Technical Information

*All product dimensions are nominal.*

|                            |                        |
|----------------------------|------------------------|
| Drain Location:            | Center                 |
| Drain Hole Diameter:       | 3-3/8" (86 mm)         |
| Shower Ledge Minimum Flat: | 2-5/8" (66 mm)         |
| Minimum Floor Load:        | 15 lbs/ft <sup>2</sup> |
| Weight:                    | 83 lbs (37.6 kg)       |

## Material

- Acrylic

## Recommended Products/Accessories

K-23726 Drain treatment

K-23732 Tub & shower cleaner

K-9132 Round shower drain for use with plastic pipe, gasket included

K-706009-D3 56-5/8"-59-5/8" W x 74" H bypass shower door with 1/4"-thick Frosted glass

K-706009-L 56-5/8"-59-5/8" W x 74" H bypass shower door with 1/4"-thick Crystal Clear glass

K-706015-D3 56-5/8"-59-5/8" W x 74" H bypass shower door with 1/4"-thick Frosted glass

K-706015-L 56-5/8"-59-5/8" W x 74" H bypass shower door with 1/4"-thick Crystal Clear glass


## Warranty

*See website for detailed warranty information.*

KOHLER® Plastic Baths and Shower Bases Lifetime Limited  
 Warranty



1-800-4KOHLER (1-800-456-4537)  
 Kohler Co. reserves the right to make revisions without notice to product specifications.  
 For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
 7-29-2026 23:37 - US-CA

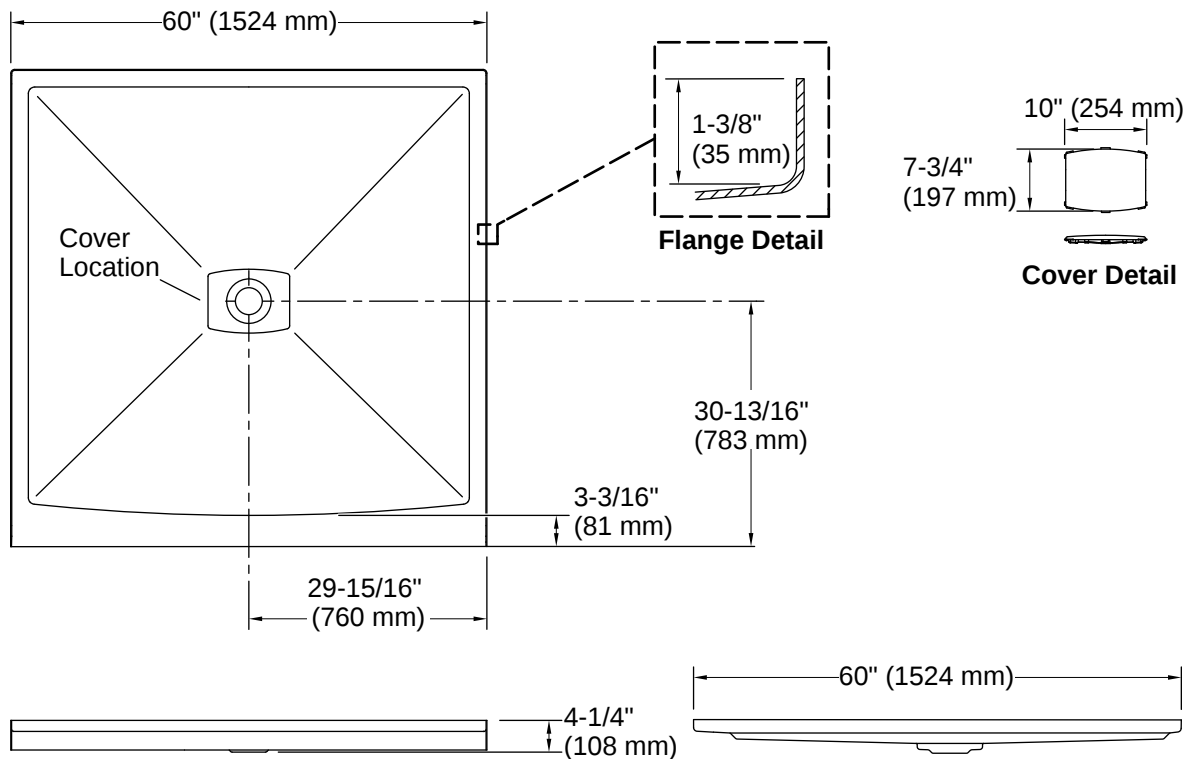

## Installation

- Center drain

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.

Shimming may be required to level the fixture.

Shimming may be required between the stud frame and the fixture.

Stud opening tolerance is + 1/4" (6 mm), - 0" (0 mm).



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

7-29-2026 23:37 - US-CA