



Type IC, Wet & Air-Tight

DESCRIPTION

4" Round 24V DC Input Recessed LED
Fits Where No Other Recessed Fixture Can

FEATURES & BENEFITS


1/2" Deep - Install Directly Under Joists -
Maximum Layout Flexibility
Fast & Easy To Install - Save On Labor
Type IC Rated - No Housing Required
Connect multiple fixtures to one driver:
up to 8 per a 96W power supply

Driver is Not included

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached
Spring Clips. Ceiling Clearance Required : 1/2"

DIMENSIONS: ID 4" OD 4 7/8" Cut Out 4" to 4 1/4"

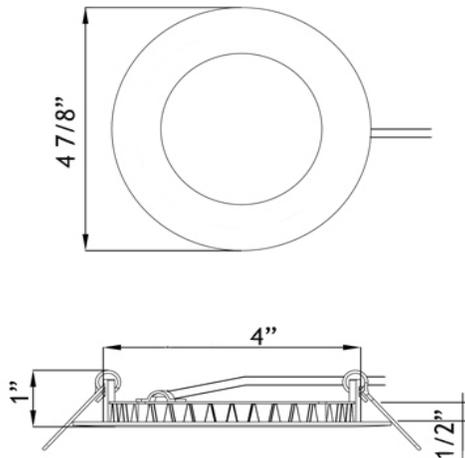

AVAILABLE TRIMS



White

Black

ORDERING GUIDE Example: **LB4R24V / 30K / WH**

	CCT	Trim Finish	
LB4R24V	/	/	
3000K	30K	WH	White
4100K	41K	BK	Black

Project: _____

Location: _____

Cat #: _____ Qty: _____

Notes: _____

SPECIFICATION

Applications	Recessed Ceiling, Showers & Soffits	
Energy Used	11 W	
Colour Temperature	3000	4100
Light Output	700	730
Halogen Equivalent	65 W	
Beam Angle	110°	
CRI	80	
Input Voltage	24V DC	
Dimmability	To 5% With Compatible Driver & Dimmer	
Approved Location	Insulated Ceiling, Wet & Damp Locations	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 25,000 Hours	
Certification	cULus	
Warranty	3 Year	

ACCESSORIES

Sold Separately



Flat Rough-In Plates - cat # **RIP4**



Flanged Rough-In Plate - cat # **FRP4**



Goof Ring OD 5 3/4"
White cat # **GR4** Black cat # **GR4-BK**

COMPLIANCE



**Type IC
Air-Tight**