





## Hardware Package(included):



Ø12\*100MM\*1PCS

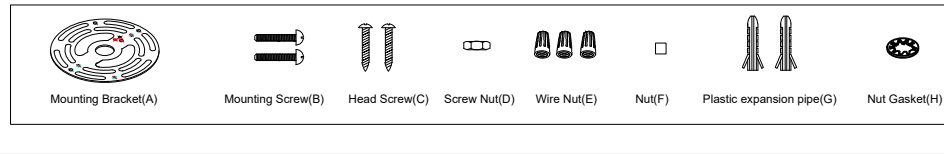

Ø12\*250MM\*3PCS

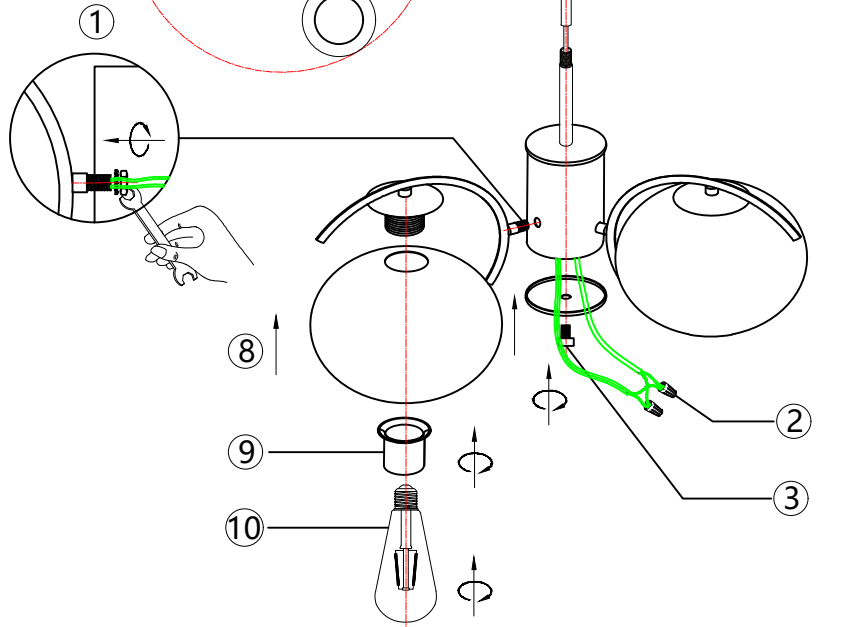

# ASSEMBLY & INSTALLATION INSTRUCTIONS

## WARNING:

TO REDUCE THE RISK OF ELECTRICAL SHOCK, TURN OFF THE POWER AT THE CIRCUIT BREAKER OR FUSE BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

## Installation Steps

Turn off the power at fuse or circuit box

### ASSEMBLY OF THE FIXTURE BODY

Please check that all accessories are included before starting installation.

Step 1: Insert the fixture arm into the cylindrical lamp holder and secure it with a nut.

Step 2: Make the wiring connections. Connect the white wire from the lamp holder to the white wire from the arm, and the black wire from the lamp holder to the black wire from the arm. Secure the connections using wire nuts.

Step 3: Place the lamp holder cover onto the fixture and secure it with the round iron piece.

Step 4: Select the appropriate suspension tube. First, thread the main wire through the tube, then tighten the tube securely. Finally, screw on the ceiling mounting plate.

Step 5: Use two mounting screws to attach the mounting bracket to the ceiling outlet box.

Step 6: Pull the electrical wires from the outlet box and make the following connections using wire nuts:

--Connect the fixture's black (hot) wire to the black wire from the power supply.

--Connect the fixture's white (neutral) wire to the white wire from the power supply.

--Connect the fixture's bare copper (ground) wire to the house ground wire.

--Tuck the connected wires carefully back into the outlet box.

Step 7: Attach the fixture body to the mounting bracket by aligning the holes on the backplate with the bracket. Insert the fixture screws and secure the fixture using the two ball nuts.

Steps 8 - 9: Unscrew the metal ring from the E26 socket. Place the glass shade over the socket, then screw the ring back on to secure the glass.

Step 10: Install an E26 base bulb (not included). Refer to the relamping label near the socket or the packaging for the maximum allowed wattage.

**--Restore power -- installation is complete.**

## Attention

1. Installation should be performed by a licensed electrician.
2. Due to variations in display settings, the actual color may differ slightly from the images shown.
3. Because the lamp body is measured manually, there may be a deviation of up to 1/2 inch.
4. If there are any quality issues, missing parts, or other problems with the item, please feel free to contact us.