


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

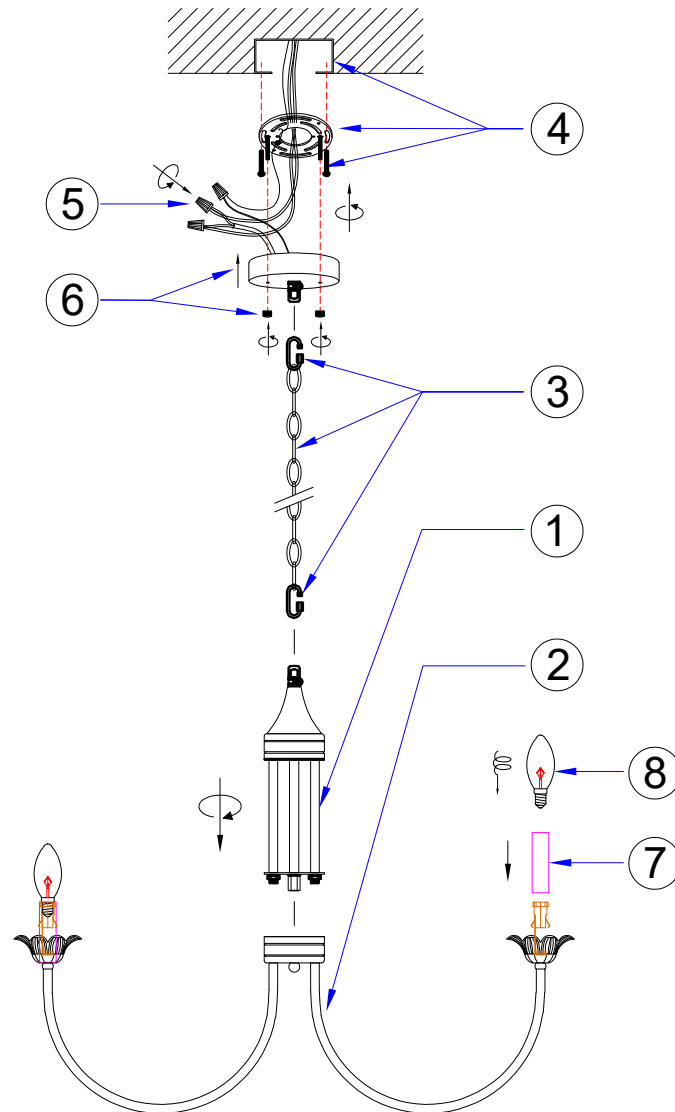

Before You Begin:

- Ensure power is turned off at the circuit breaker before installation.
- Read all instructions carefully.
- Installation should be performed by a qualified electrician if you are unfamiliar with wiring.

Step-by-Step Installation:

1. Pass the wires through the component. Then secure the component onto the fixture body.
 2. Evenly and symmetrically spread out the eight curved arms.
 3. Connect the Chain
 - Adjust the chain to the desired length.
 - Feed the wires through the chain, the loop, and the canopy.
 - Use the quick link to connect one end of the chain to the canopy loop, and the other end to the fixture loop.
 4. Secure the mounting plate to the junction box using the mounting screws.
 5. Connect the fixture wires to the supply wires from junction box.
 - Use wire connectors to connect the black (hot) wire to the black wire, the white (neutral) wire to the white wire, and the ground wire to the grounding terminal.
 6. Carefully tuck all wires into the junction box. Then secure the canopy to the mounting plate with the nuts.
 7. Slide the sleeve over the socket.
 8. Install light bulbs (bulbs not included) and test for proper operation.
- Installation is complete.

Safety Instructions:

To avoid fire, shock, and serious personal injury, follow all instructions carefully.

1. Do not install or use the light fixture if any part is missing or damaged.
2. To avoid possible electrical shock, be sure electricity is turned off at the main fuse or circuit breaker box before wiring.
3. Make certain no bare wires are exposed outside the wire connectors.
4. All wiring must conform to national and local electrical codes.
5. Follow the recommended instructions for the proper method of wiring your new light fixture. If you feel you do not have enough electrical wiring knowledge or experience, have your light fixture installed by a licensed electrician. Any electrical work not described in this manual should be performed by a licensed electrician.