



Screws A1 and a1 are smaller than screws A and a



(A) x34 (a) (A1) x24 (a1) (B) x48 (C) x24




(D) x2



(E)



(F)

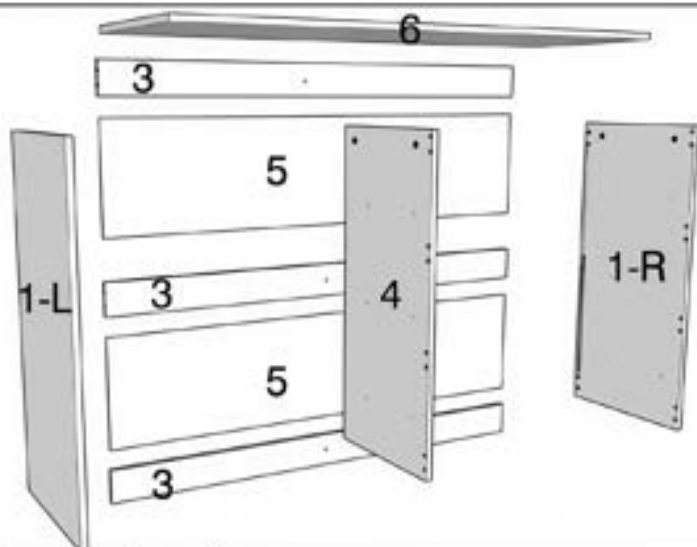

1-L and 1-R are symmetrical single-sided screw holes, with numerous screw holes, located on the left and right side panels of the cabinet.
3 is the crossbeam plate on the back of the cabinet
5 is the backboard



1-L 1-R




3 X2



5 X2
thin board

These two boards are narrower.

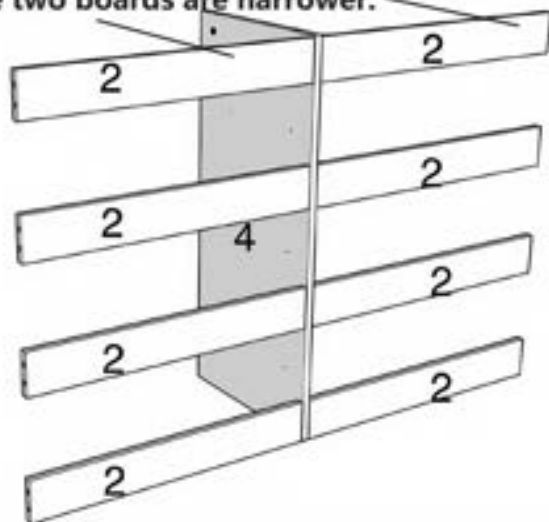

2 is the connecting plate under the drawer
4 is the middle vertical panel of the cabinet




2 X8
22.71in-L



4 X1
holes on
both sides




6 X1
top board
47.24in-L

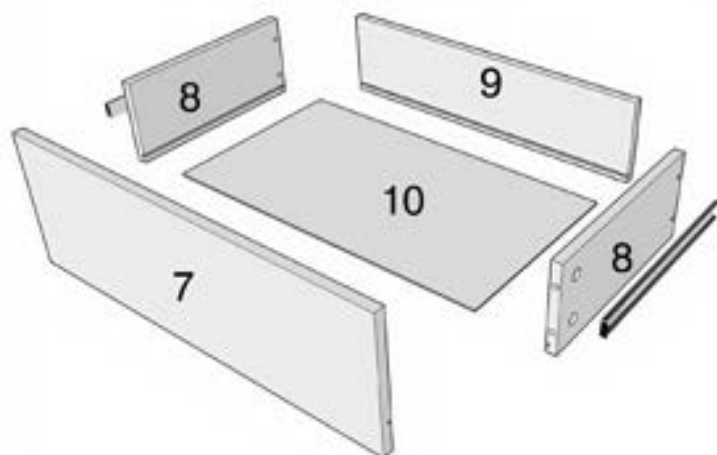

7 is the front panel of the drawer
8 is the left and right side panels of the drawer
9 is the drawer back panel
10 is the drawer bottom plate



7 X6
drawer front



8 X12
drawer side




9 X6
drawer back



10 X6
drawer bottom

Let's separate the guide rail first



SAFETY RELEASE TAB

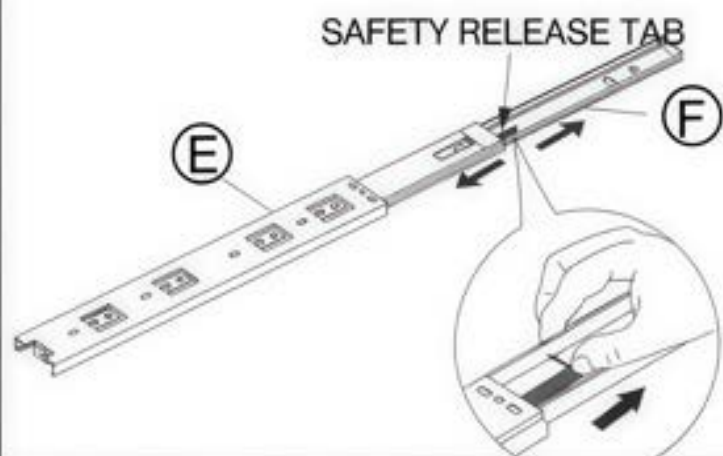


E and F are shipped together to maintain the oil for the ball bearings. Note that you need to tip up the safety release tab to take out the F part prior to assembly





Install drawer

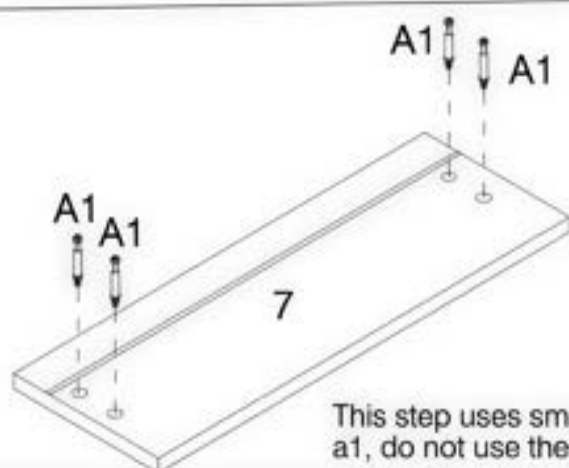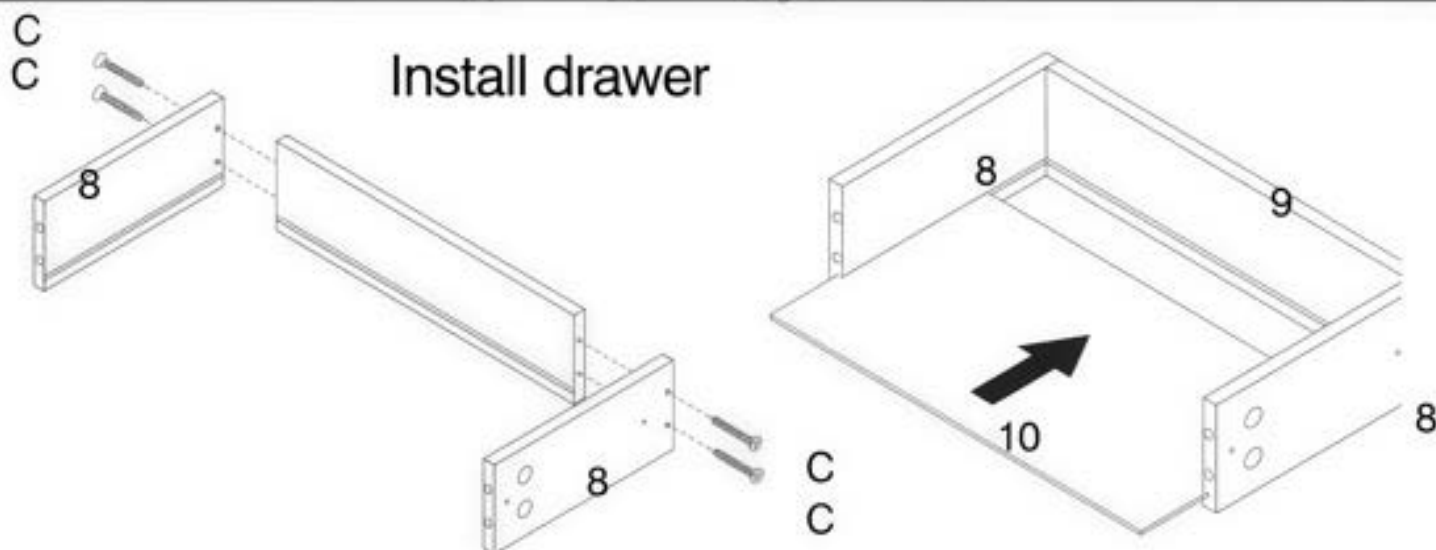

This step uses smaller screws A1 and a1, do not use the wrong screws

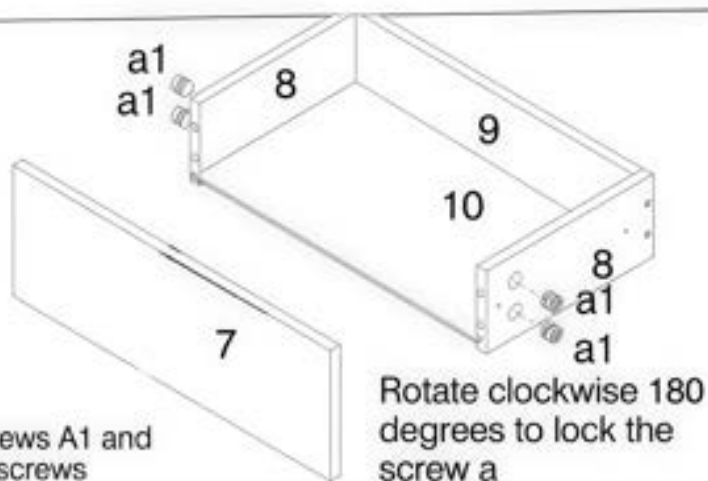


Rotate clockwise 180 degrees to lock the screw a

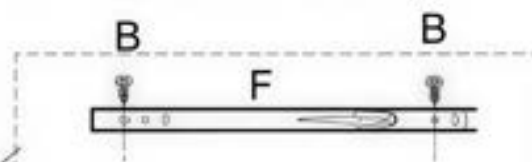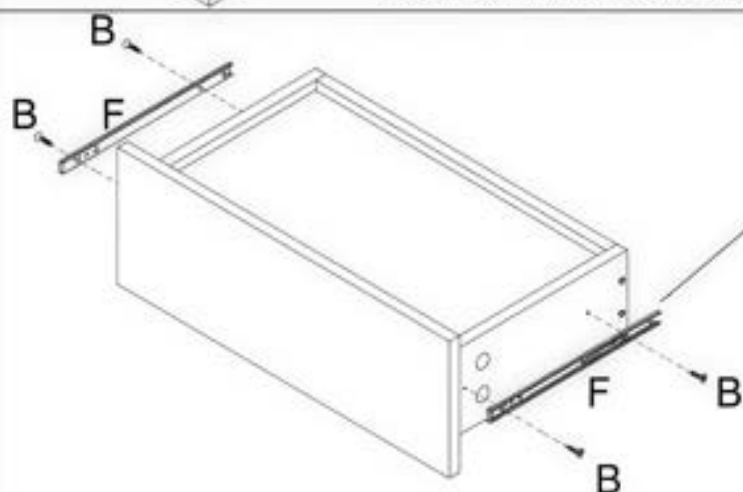

Lock the guide rail F with screw B
Lock the guide rail F with screw B

Install six drawers using the same method

Install cabinet

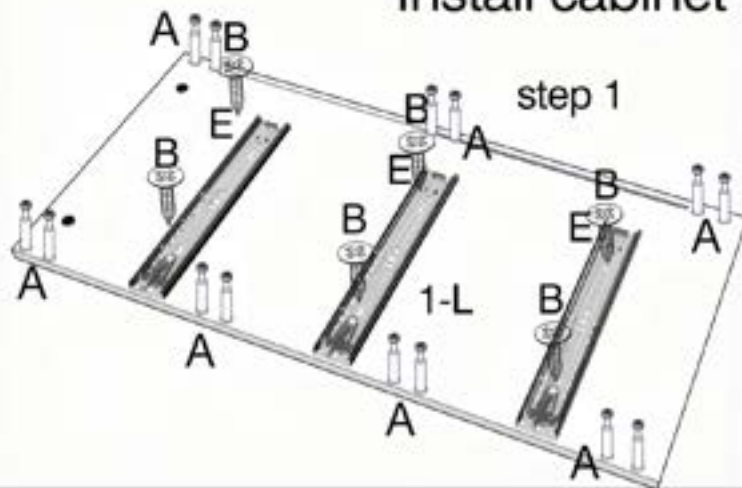

step 1

Fix the guide rail E to the 1L board using screw B



Fix screw A(*14) in the plastic circular hole

step 2


Fix 4*boards2 and 3*boards3 to board 1-L

The screw holes should face north from the current perspective

Wrong direction can rotate the board, just like turning backwards or upside down

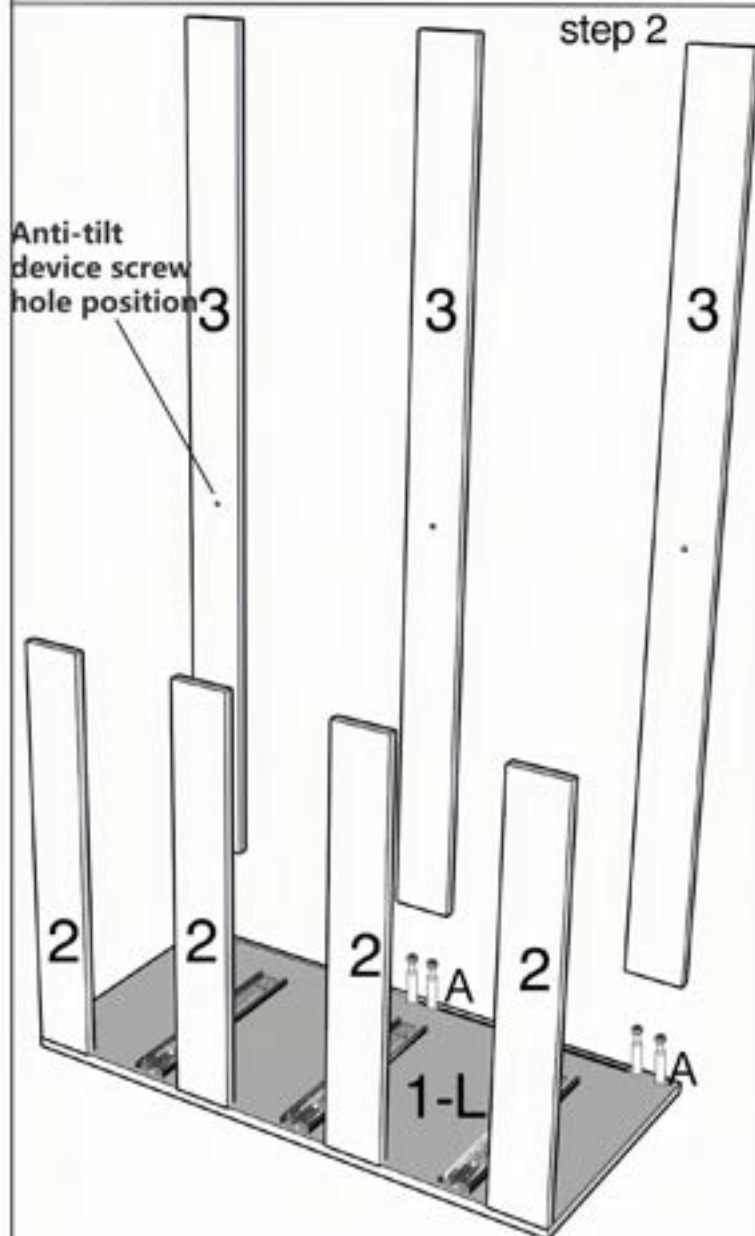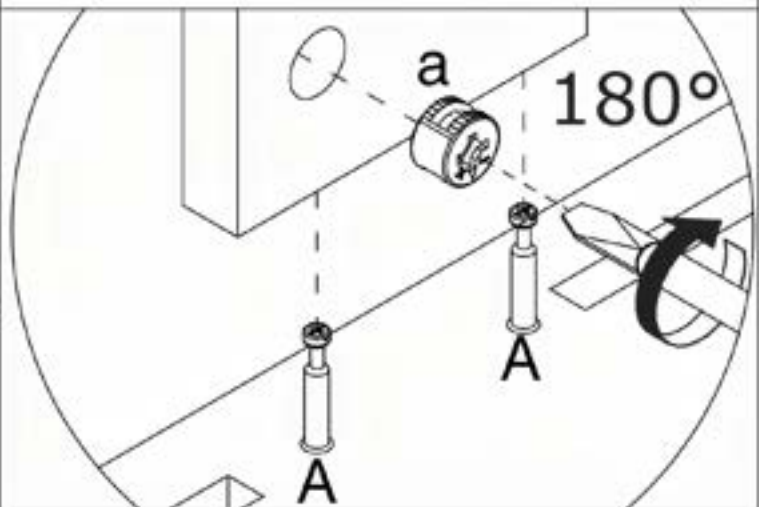

step 3

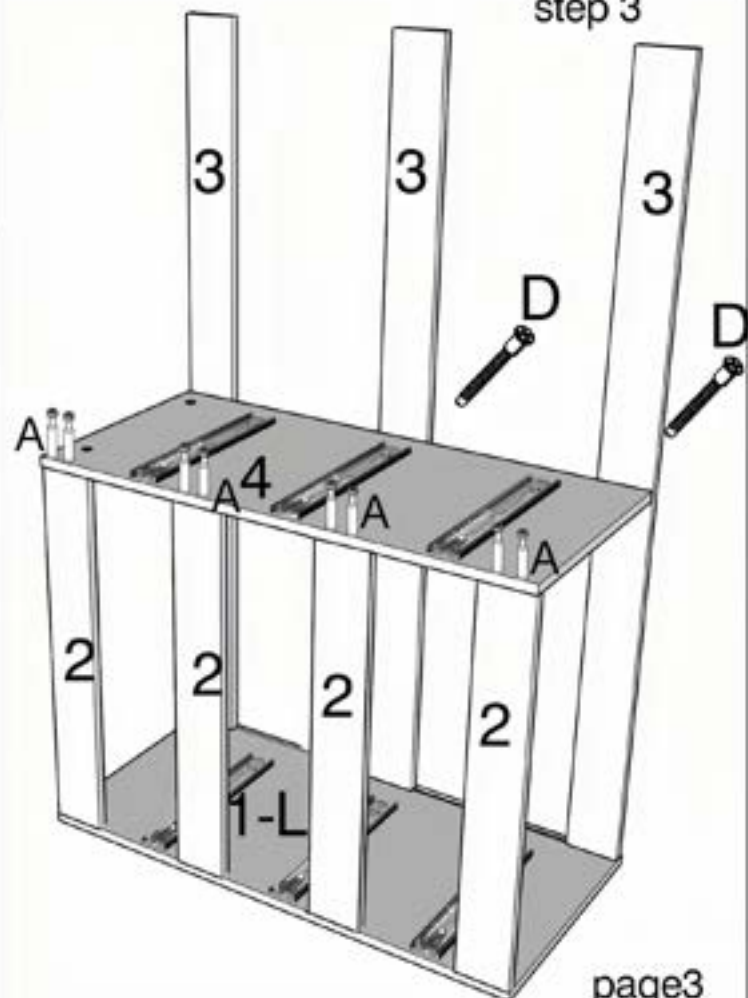


step 3


The installation method for board 4 and board 1 is the same, but it requires fixing guide rails E on both sides

Screw D is fixed to the side of board 4 through the through-hole of board 3


step 6 The installation method of Plate 1-R is the same as that of Plate 1-L

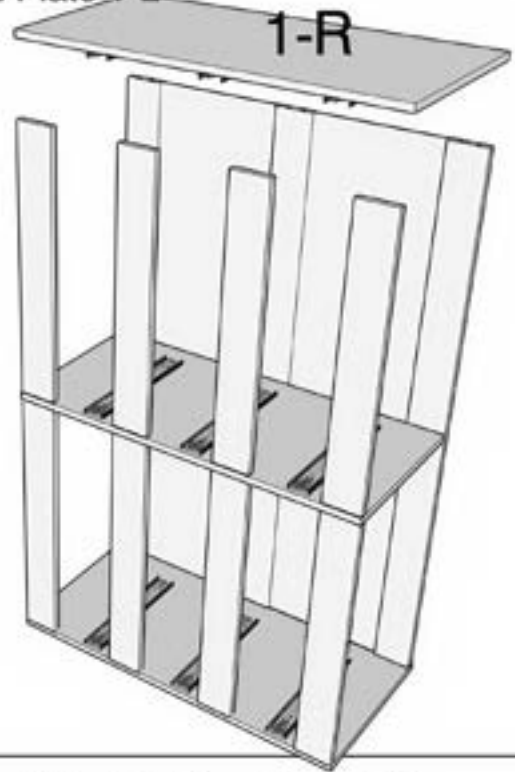



step 4 fix board 2 * 4 to board 4

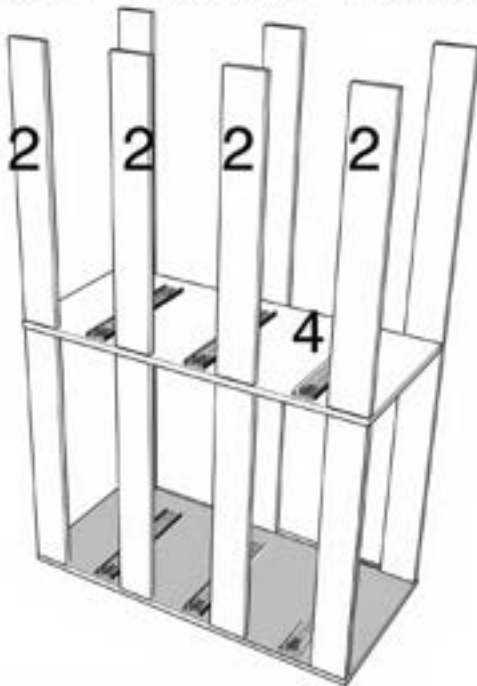

step 7 Installation of board 6, connecting board 4, board 3, board 1-L and board 1-R

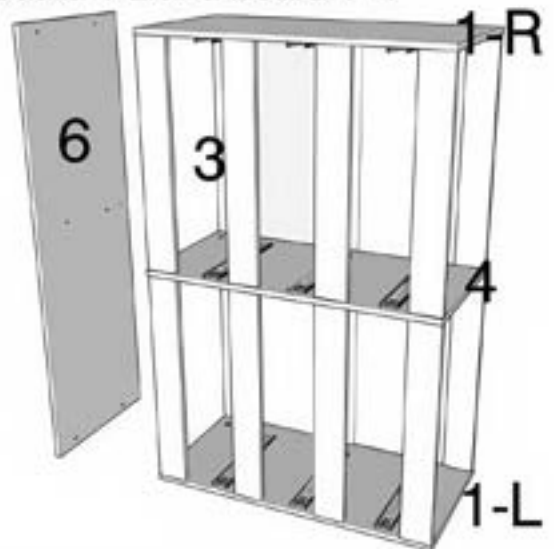

Step 5, insert board 5 into the groove of board 3

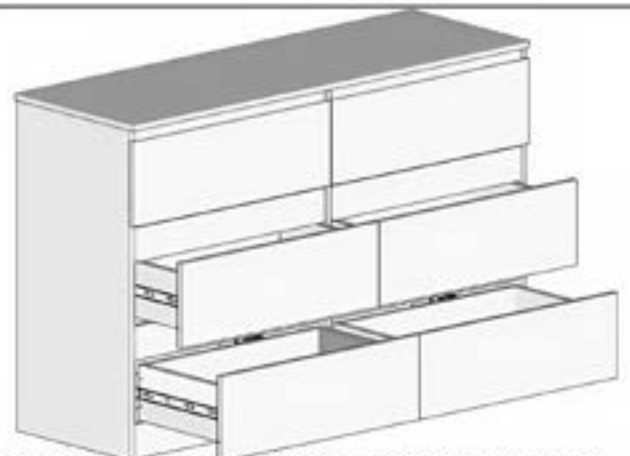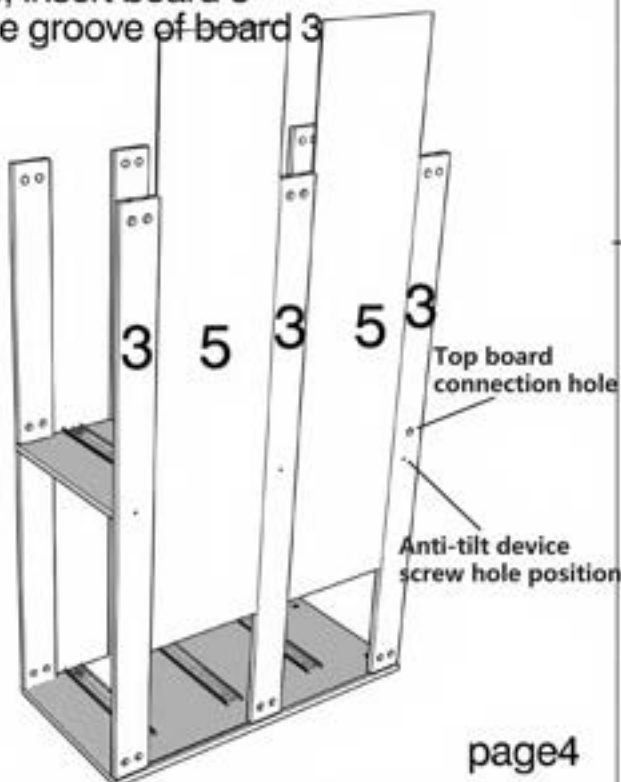

Step 8, two people lift the cabinet up and place it upright, insert it into the drawer, which has left and right differentiation