



Installation & Assembly

Warning:



1. Read Instruction Carefully.
2. If You Are Unclear As to How to Proceed, Please Consult A Qualified Electrician. Proper Wiring is Essential for the Safe Operation of this fixture.
3. Remove All Parts from Package, Be Careful not to Damage Any Components.

1. Screw the Rods [D] (3pcs 12" + 1pc 8" + 1pc 4") and Canopy [G] to the Fixture [E]. (Adjust the Height of Fixture based on Your Selecting Rods.)
2. Attach the Mounting Bar [H] to the Outlet Box Using Outlet Box Screws [J].
3. Connect the Black Wire of Lamp to the Supply Black Wire by Connector [I], Connect White Wire of Lamp to the Supply White Wire by Connector [I]. Connect the Ground Wire to the Supply Ground Wire by Connector [I] or Fasten on the Mounting Bar [H].
4. Place the Canopy [G] onto the Mounting Bar [H], Then Screw with Finials [K].
5. Remove the Socket Ring [B] from Socket.
6. Install Glass [A] on Socket, and Secured with Socket Ring [B].
7. Install Bulb [C]. (Bulb not Included)

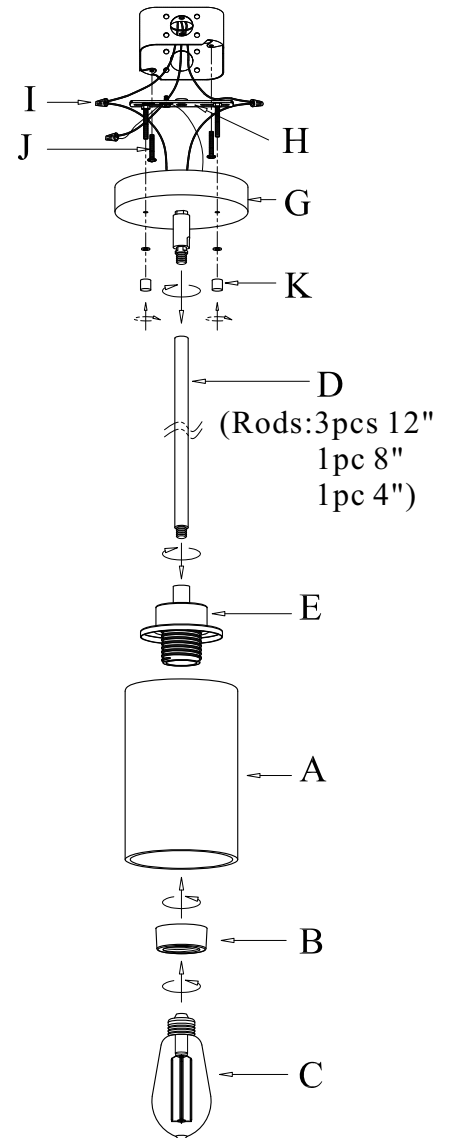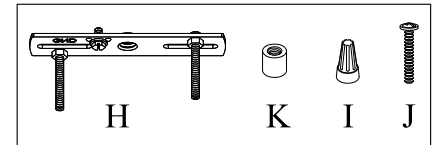

CAUTION:

1. Turn the Power Off before Replacing the Bulb. Make Sure the Bulb has Sufficient Time to Cool Down. Do not Subject the Lamp to any Shock While Lit as Shattering of Lamp May Result.
2. To Clean, Use A Soft Cloth Only.