INSTRUCTION MANUAL

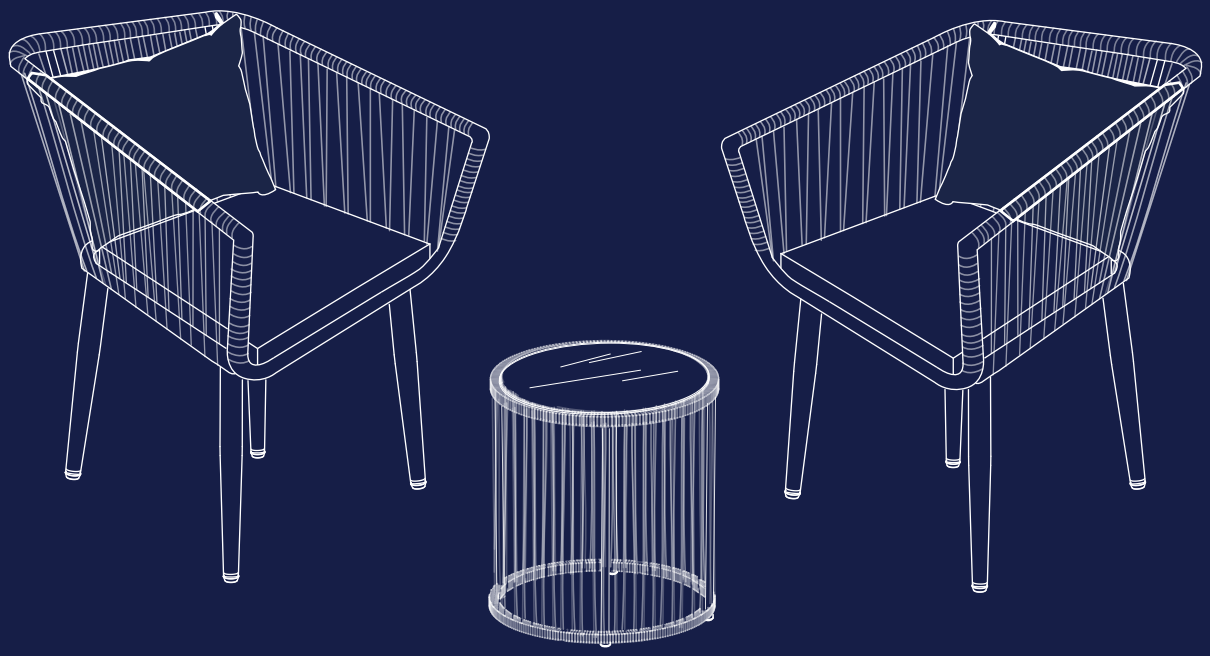

3-PIECE PATIO CONVERSATION SET

TC01GY
TC02BG
TC03BK

Ver.1

Customer Service Team

We are honored that when it comes to furnifure, you think of us. There are multiple choices out there but you singled us. We appreciate your choosing to do your shopping with us and want to be certain that you're satisfied with your transaction. We hope you enjoy our product as much as we enjoy creating the brand that you think of first.

If you have any questions, please contact us through Amazon. If you are satified with the product, after receiving the package, you can share your shopping experience with others. Thank you very much. Have a nice day.

ⓘ NOTICE

- Prior to first usage check to confirm all bolts, screws, and fasteners are tightened.
- We recommend periodically checking that all bolts, screws, and fasteners are securely tightened. We suggest doing this every 90 days.
- During assembly do not fully tighten screws until assembly complete.
- Do not store this product near an open flame or combustible or flammable chemicals.
- Carefully inspect all parts prior to assembly to avoid any component which might have a sharp or unfinished edge.
- During inspection should you notice any component which is damaged or worn, replace it before resuming use.
- Do not use this item in a way inconsistent with the manufacturer's instructions as this could void the product warranty.
- Please do not allow the parts to come into direct contact with the ground to prevent the parts from being scratched.

TOOLS PROVIDED





SCREW BAG

I SCREW	K WASHER	L WRENCH
		
M6x15 24pcs	M6 24pcs	1pc

PARTS-CARTON A

A CHAIR FORE LEG  4pcs	B CHAIR BACK LEG 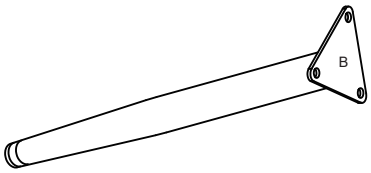 4pcs	C CHAIR SEAT  2pcs
E TABLE  1pc	F GLASS  1pc	G SEAT CUSHION  2pcs
H BACK CUSHION  2pcs		

PRODUCT ASSEMBLY - CHAIR

⚠ Tight all the screws to 60% first then tight to 100%.

1

Attach 2 part A and 2 part B fore/back chair leg to part C chair seat with 12 part I screws and 12 part K washers.

Repeat for another chair.

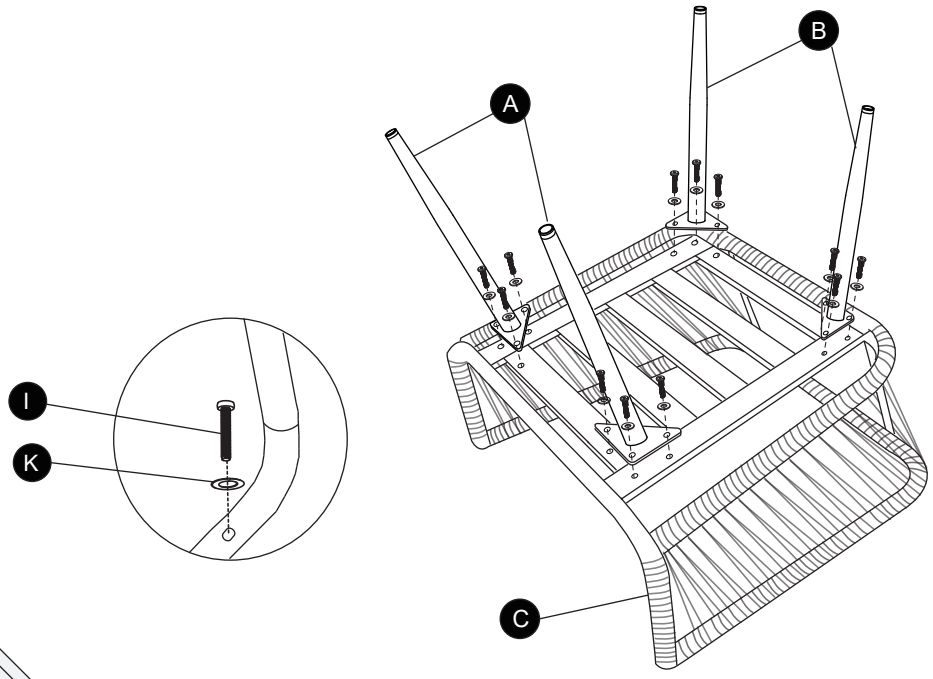



×2

PRODUCT ASSEMBLY - FINAL

⚠ Tight all the screws to 60% first then tight to 100%.

1

Place part F glass.
Place part G seat cushion and part H back cushion.

