


# FULL SIZE LOFT BED ASSEMBLY INSTRUCTIONS

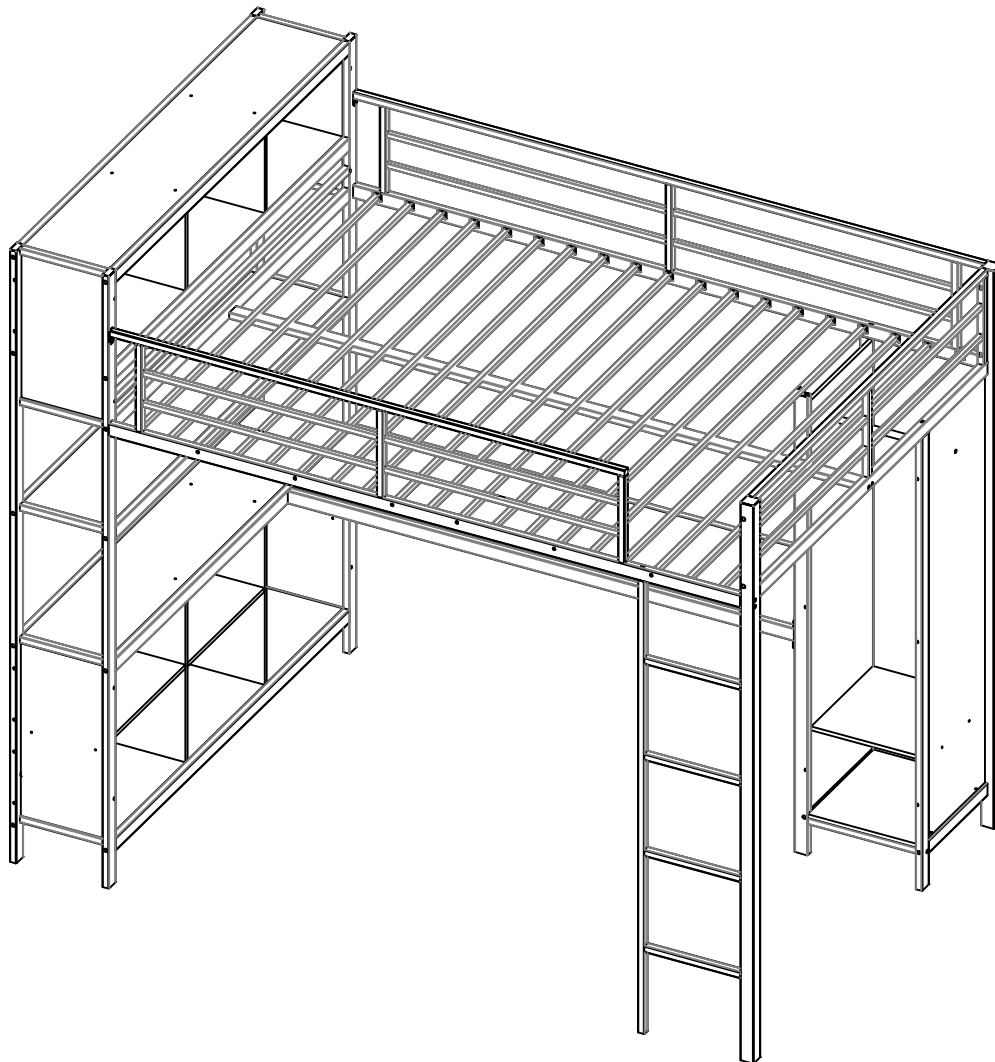

## SAFETY WARNINGS AND GENERAL NOTES:

1. Follow the information on the warnings on the bunk bed end structure and on the carton. Do not remove the warning label from the bed.
2. Always use the recommended size mattress on mattress support, or both, to help prevent the likelihood of entrapment or falls.
3. Do not allow children under 6 years of age to use the upper bunk.
4. Periodically check and ensure the guardrail, ladder and other components are in their proper position, free from damage, and all connectors are tight.
5. Do not allow horseplay on or under beds.
6. Always prohibit jumping on the bed.
7. Prohibit more than one person on upper bunk.
8. Always use the ladder for entering and leaving the upper bunk.
9. Do not use substitute parts. Contact the manufacturer or dealer for replacement parts.

10. Use of a night-tight may provide added safety precaution for a child using the upper bunk.

11. Always use guardrails on both long sides of the upper bunk.

12. If the bunk bed will be placed next to a wall, the guardrail that runs the full length of the bed should be placed against the wall to prevent entrapment between the bed and the wall.

The use of water or sleep flotation mattresses is prohibited.

13. **STRANGULATION HAZARD**-Never attach or hang items to any part of the bed that are not designed for use with the bed; for example, but not limited to, hooks, belts and jump ropes.

14. Keep these instructions for future reference.

15. We recommend assembling your bunk bed on the shipping carton to protect your floor or carpet.

16. Be certain all staples are out of the box before beginning assembly on the shipping carton.

17. USE ONLY MATTRESSES WHICH ARE AS THE TABLE BELOW ON UPPER AND ON LOWER BUNKS.

Up bed (bunk bed and tribed included)


Mattress size	Length	Width	Thickness
Full Standard	74"-75"	53"-54"	6"max

18. SURFACE OF MATTRESS MUST BE AT LEAST 5"(127MM) BELOW THE UPPER EDGE OF GUARDRAILS.





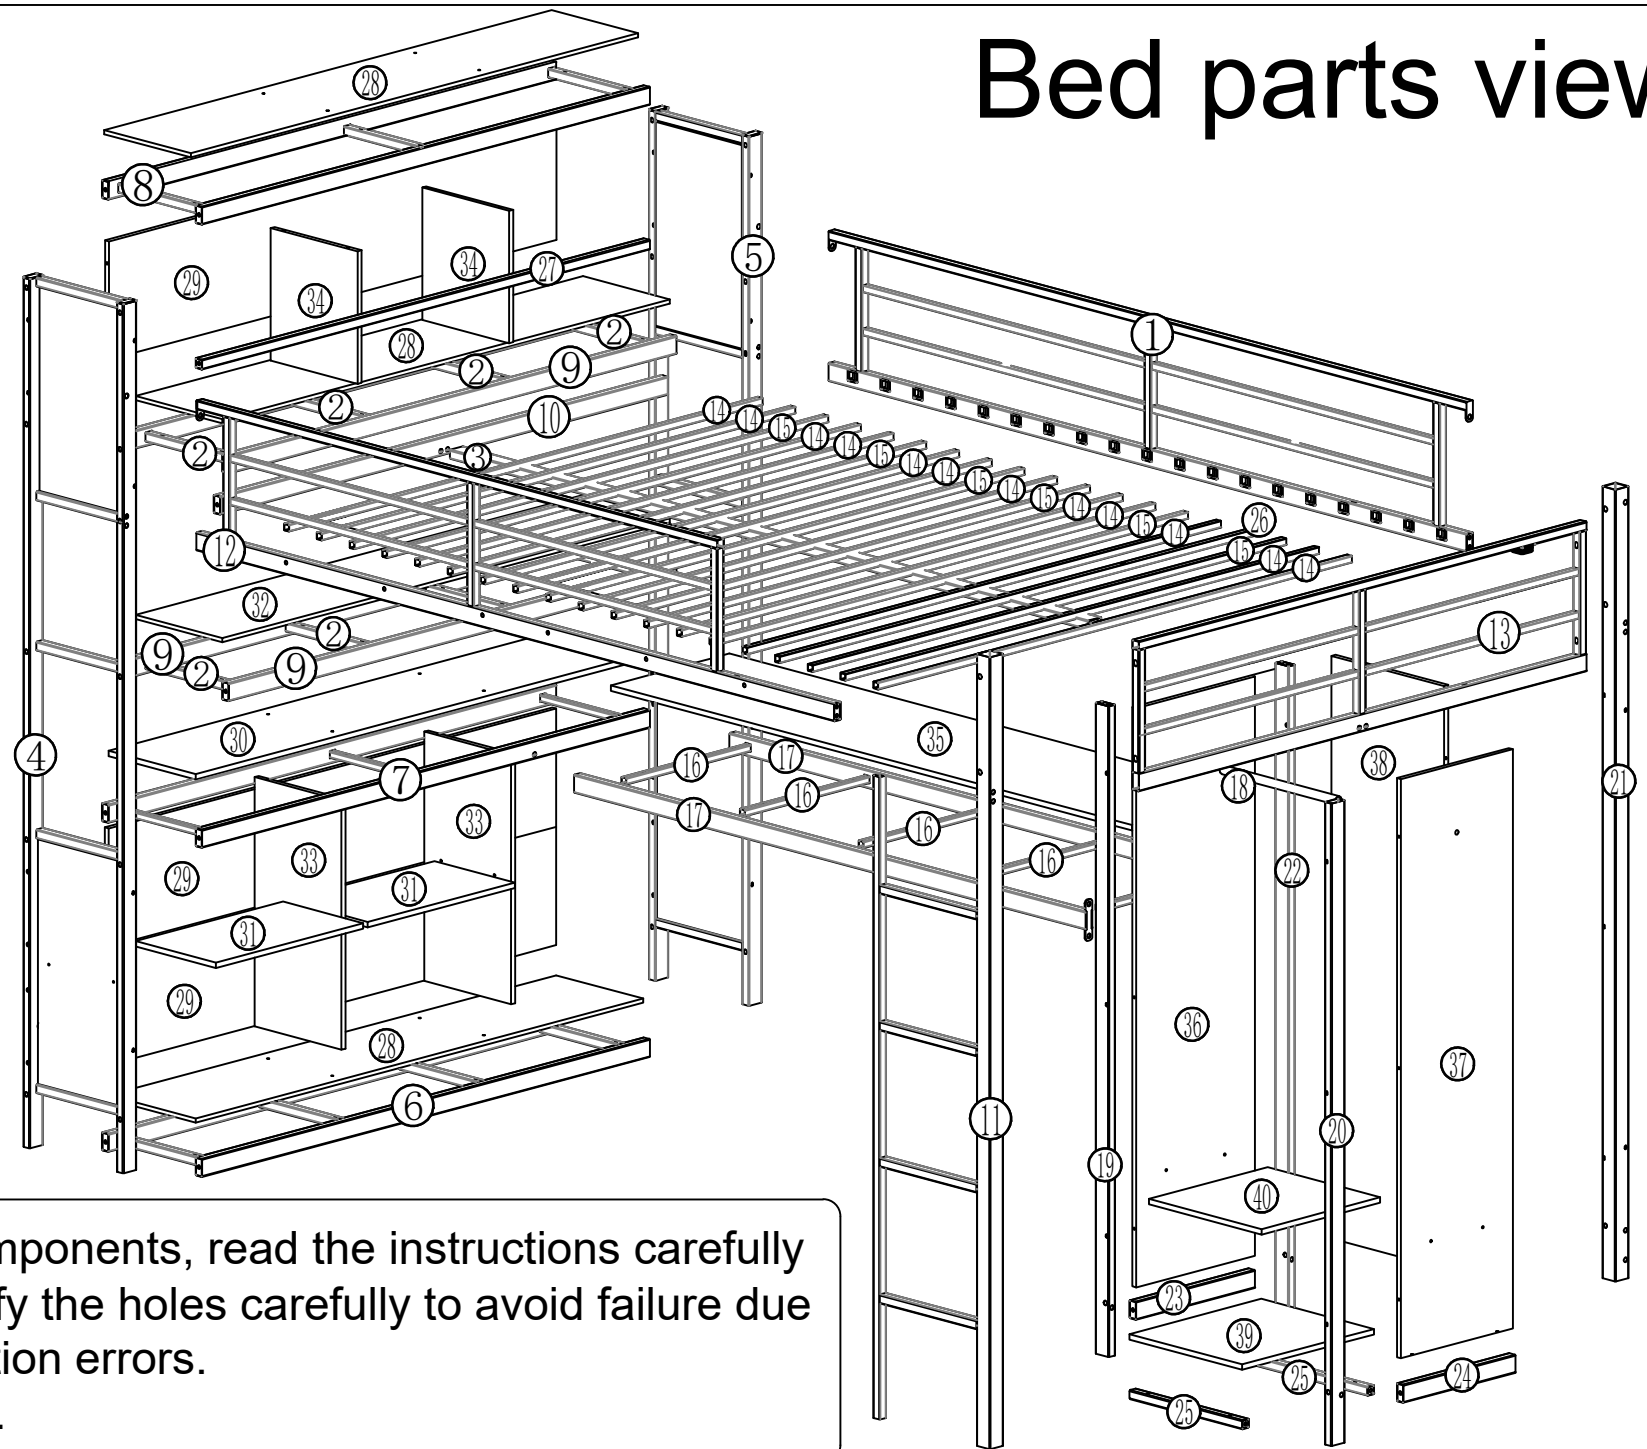
















































































19. Replacement Parts:

Replacement Parts, including additional guardrails, may be obtained from any of our dealers.


# Bed parts view














For all components, read the instructions carefully and identify the holes carefully to avoid failure due to installation errors.  
**Attention** thank you.

 1-1pcs	 11-1pcs	 21-1pcs	 28-3pcs	 34-2pcs															
 2-8pcs	 12-1pcs	 22-1pcs	 29-3pcs	 35-1pcs															
 3-1pcs	 13-1pcs	 23-1pcs	 30-1pcs	 36-1pcs															
 4-1pcs	 14-12pcs	 24-1pcs	 31-2pcs	 37-1pcs															
 5-1pcs	 15-6pcs	 25-2pcs	 32-1pcs	 38-1pcs															
 6-1pcs	 16-5pcs	 26-1pcs	 33-2pcs	 39-1pcs															
 7-1pcs	 17-2pcs	 27-1pcs	 40-1pcs																
 8-1pcs	 18-1pcs	<h2 style="margin: 0;">Part List</h2> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;"> A 4*8 50PCS</td> <td style="text-align: center;"> B 8*15 6PCS</td> <td style="text-align: center;"> C 8*35 18PCS</td> <td style="text-align: center;"> D 8*55 39PCS</td> <td style="text-align: center;"> E 6*30-18PCS</td> <td style="text-align: center;"> F 7PCS</td> <td style="text-align: center;"> G 4*35-22PCS</td> <td style="text-align: center;"> H 4*50-22PCS</td> <td style="text-align: center;"> M</td> <td style="text-align: center;"> P (Installed)</td> <td style="text-align: center;"> N (Installed)</td> <td style="text-align: center;"> O (Installed)</td> <td style="text-align: center;"> L</td> <td style="text-align: center;"> J 5*10-12PCS</td> <td style="text-align: center;"> K 38pcs</td> </tr> </table>			 A 4*8 50PCS	 B 8*15 6PCS	 C 8*35 18PCS	 D 8*55 39PCS	 E 6*30-18PCS	 F 7PCS	 G 4*35-22PCS	 H 4*50-22PCS	 M	 P (Installed)	 N (Installed)	 O (Installed)	 L	 J 5*10-12PCS	 K 38pcs
 A 4*8 50PCS	 B 8*15 6PCS				 C 8*35 18PCS	 D 8*55 39PCS	 E 6*30-18PCS	 F 7PCS	 G 4*35-22PCS	 H 4*50-22PCS	 M	 P (Installed)	 N (Installed)	 O (Installed)	 L	 J 5*10-12PCS	 K 38pcs		
 9-1pcs	 19-1pcs																		
 10-1pcs	 20-1pcs																		

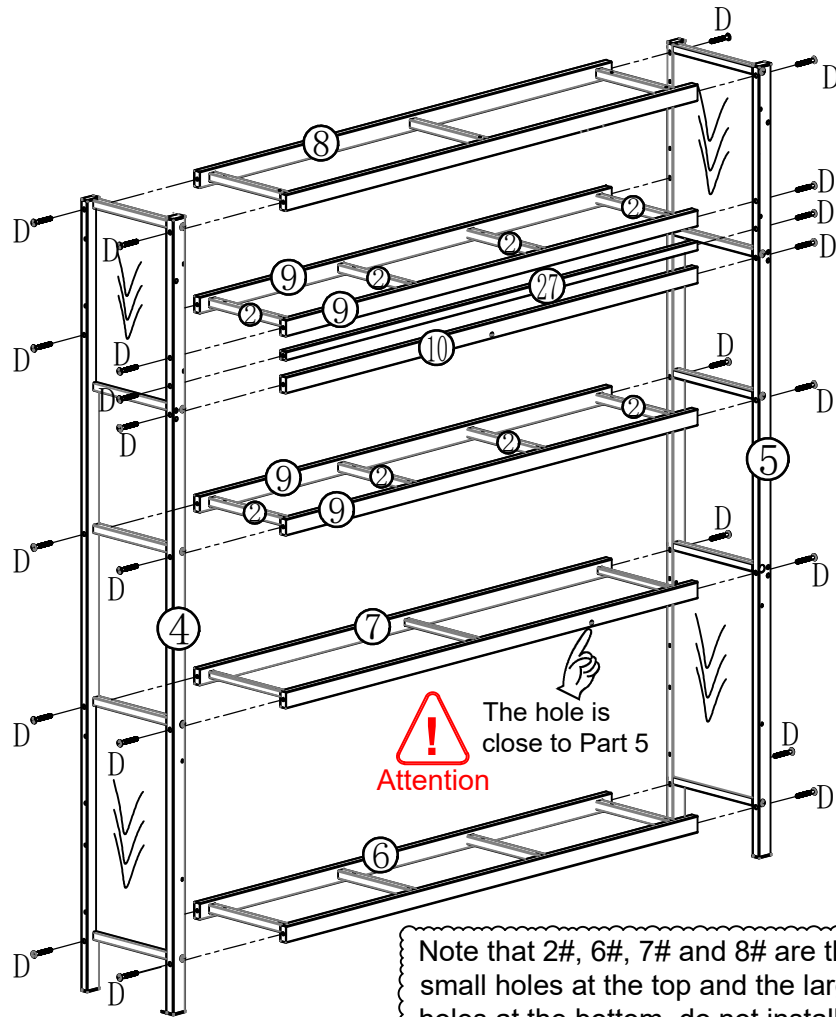
Step 1: Use hardware L and D to connect #2,#4,#5,#6,  
#7,#8,#9,#10 and #27 to the previously installed  
components.








Note that 2#, 6#, 7# and 8# are the small holes at the top and the large holes at the bottom, do not install incorrectly


 4-1pcs	 7-1pcs	 8-1pcs	 D 8*55-24PCS
 5-1pcs	 6-1pcs	 9-4pcs	
 10-1pcs	 27-1pcs	 2-8pcs	 L

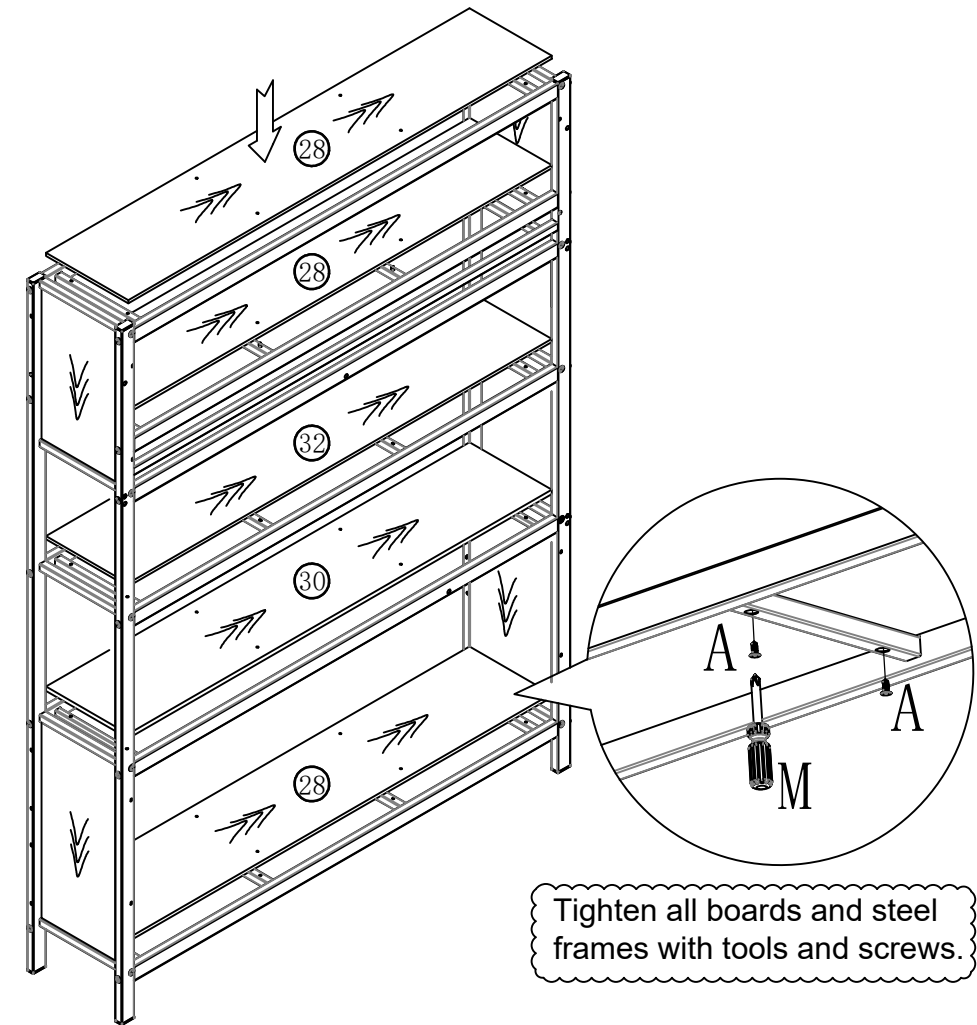Step 2: Use hardware M,A, connect #28,#30 and #32  
to the previously installed components.





 28-3pcs	 30-1pcs	 A 4*8 36PCS	 M
 32-1pcs			


Step 3: Use hardware M,G to connect #33 and #34 to the previously installed components.

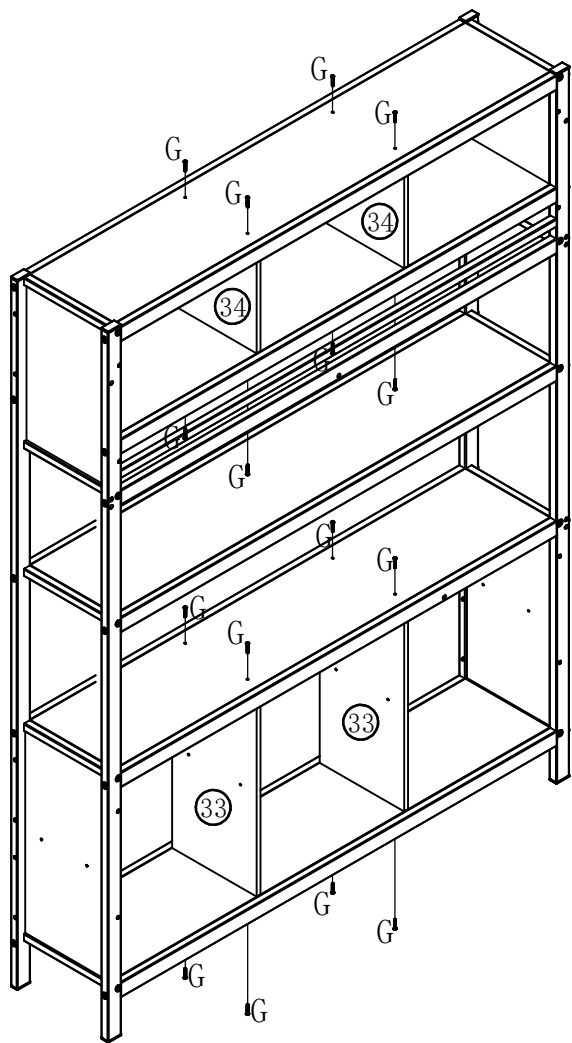

Step 4: Use hardware M,H to connect #29 to the previously installed components.

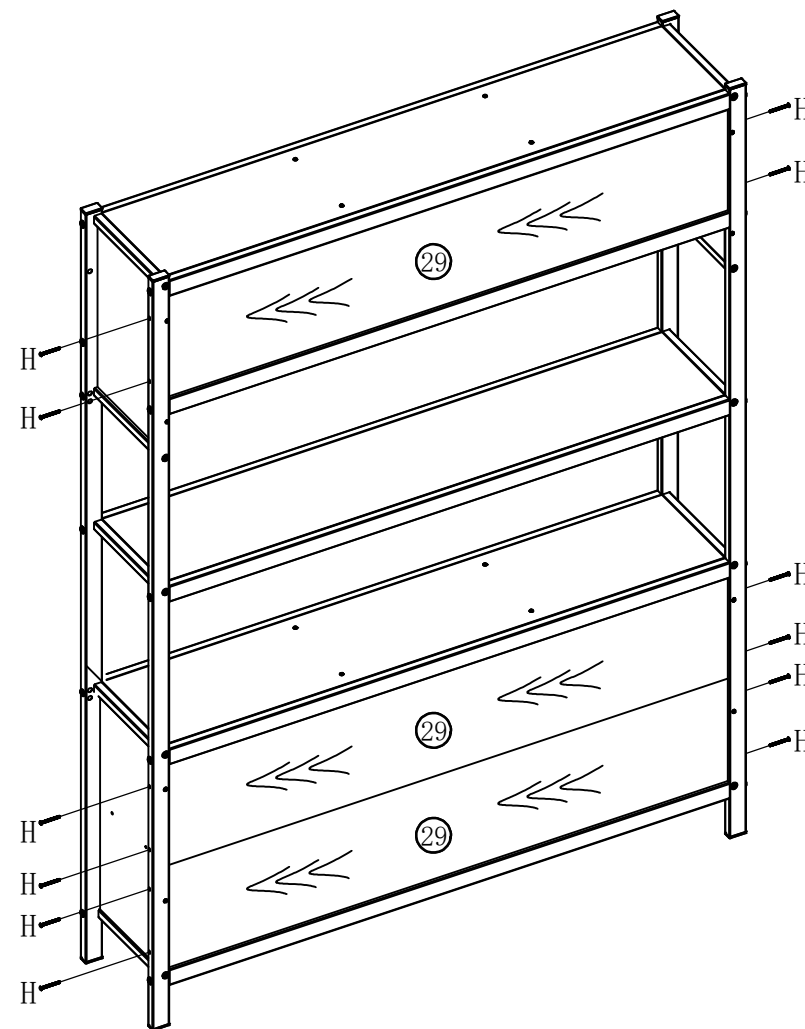

33-2pcs



34-2pcs




G

4\*35-16PCS



M



29-3pcs




H

4\*50-12PCS




M

Step 5: Use hardware L,M,C,D,H,G to connect #19 ,#20, #21,#22,#23,#24,#36 and #37 to the previously installed components.(Don't get the direction wrong)

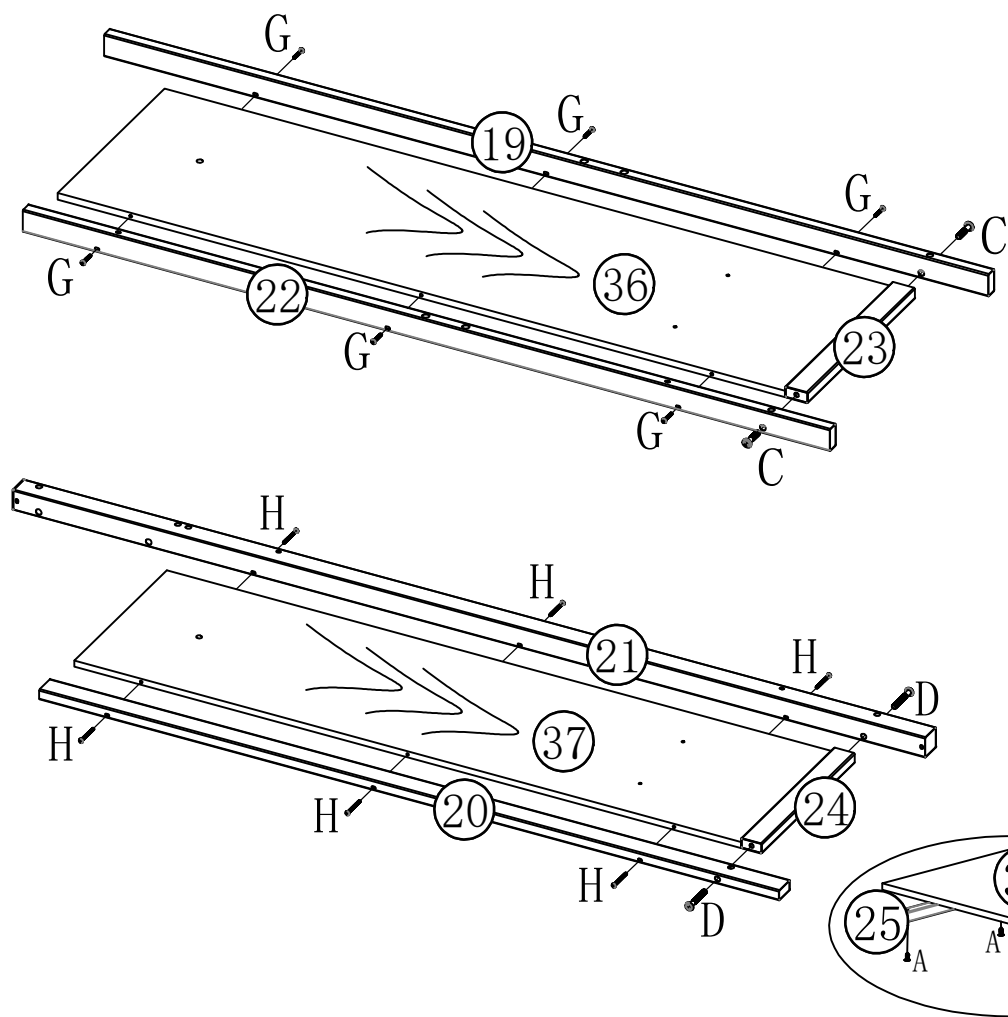










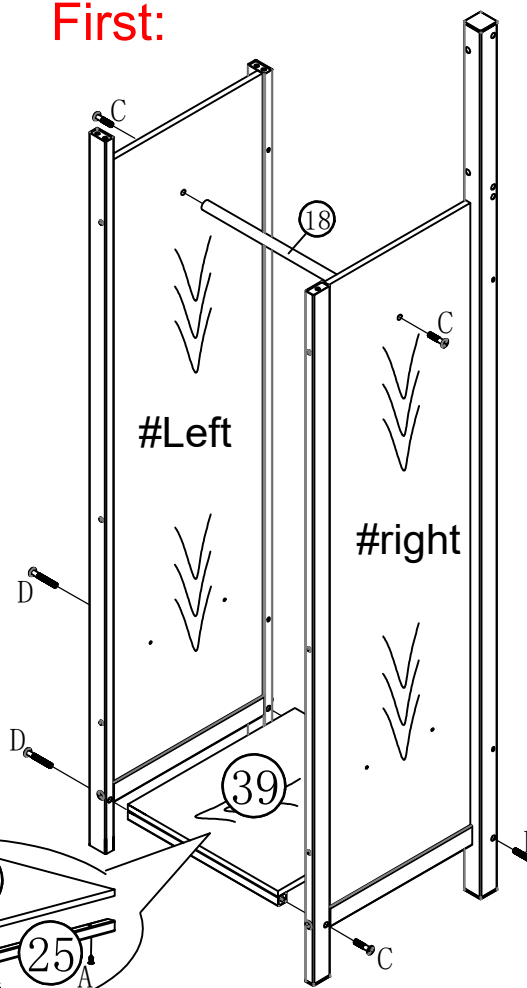





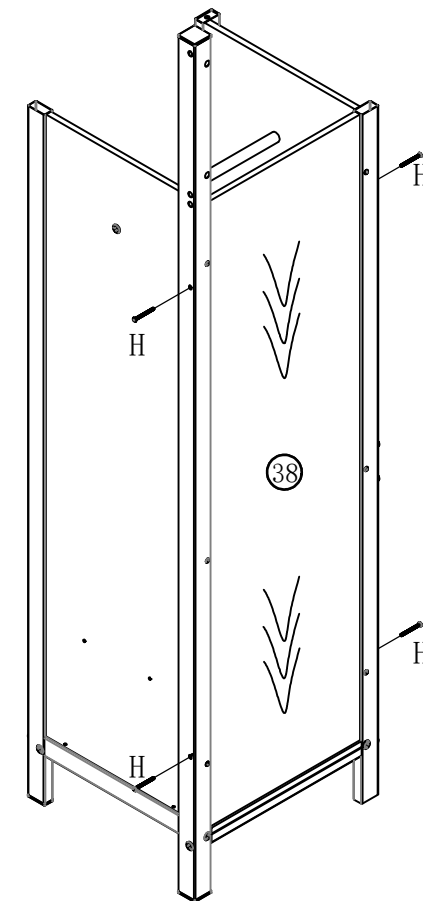

Step 6: Use hardware L,M,C,D,H to connect #18,#25,#38 #39 to the previously installed components.(Don't get the direction wrong)

First:




Then (back):








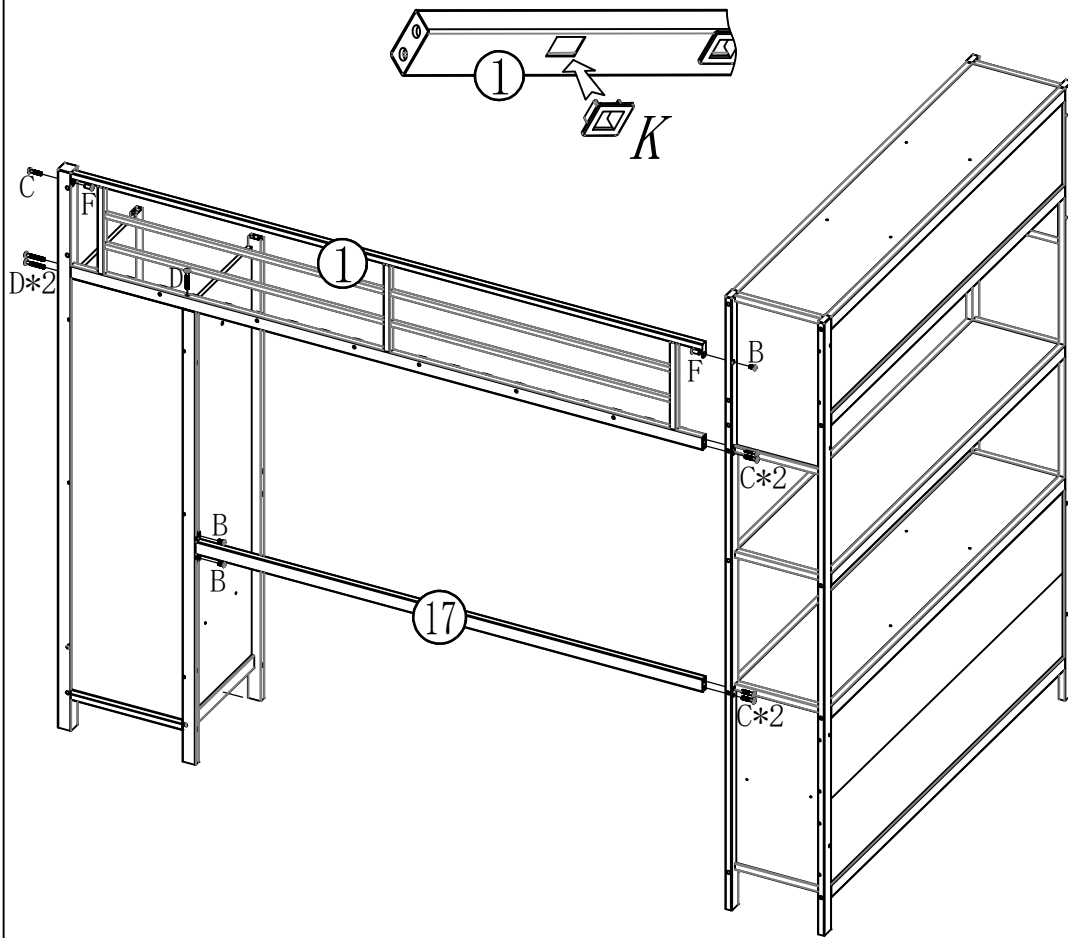

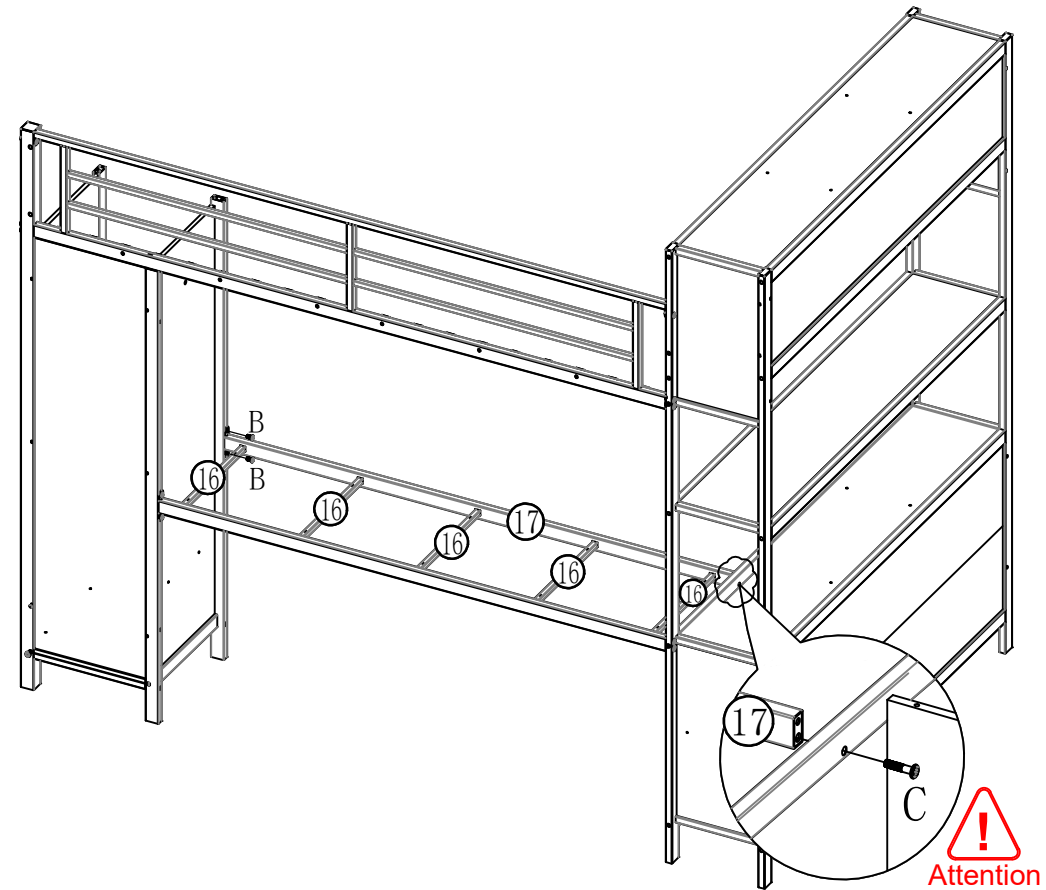

19-1pcs	21-1pcs	23-1pcs	 C 8*35-2PCS	 D 8*55-2PCS	 M	 18-1pcs	 25-2pcs	 A 4*8 4PCS	 C 8*35 3PCS	 D 8*55 3PCS	 H 4*50 4PCS	 M	 L	
22-1pcs	20-1pcs	24-1pcs	 G 4*35-6PCS	 H 4*50-6PCS	 L	 38-1pcs	 39-1pcs							
36-1pcs	37-1pcs													






Step 7: Install part #K to parts #1, then Use hardware L,B,C,D,F to connect #1 and #17 to the previously installed components.




Step 8: Use hardware L,B,C to connect #16 and #17 to the previously installed components.





 1-1pcs	 19PCS	 8*15-3PCS	 8*55-3PCS	
 17-1pcs		 8*35-5PCS	 8*15-2PCS	

 17-1cs	 8*15 2PCS	 8*35 1PCS	
 16-5pcs			

Step 9: Use hardware M,A to connect #35 to the previously installed components.

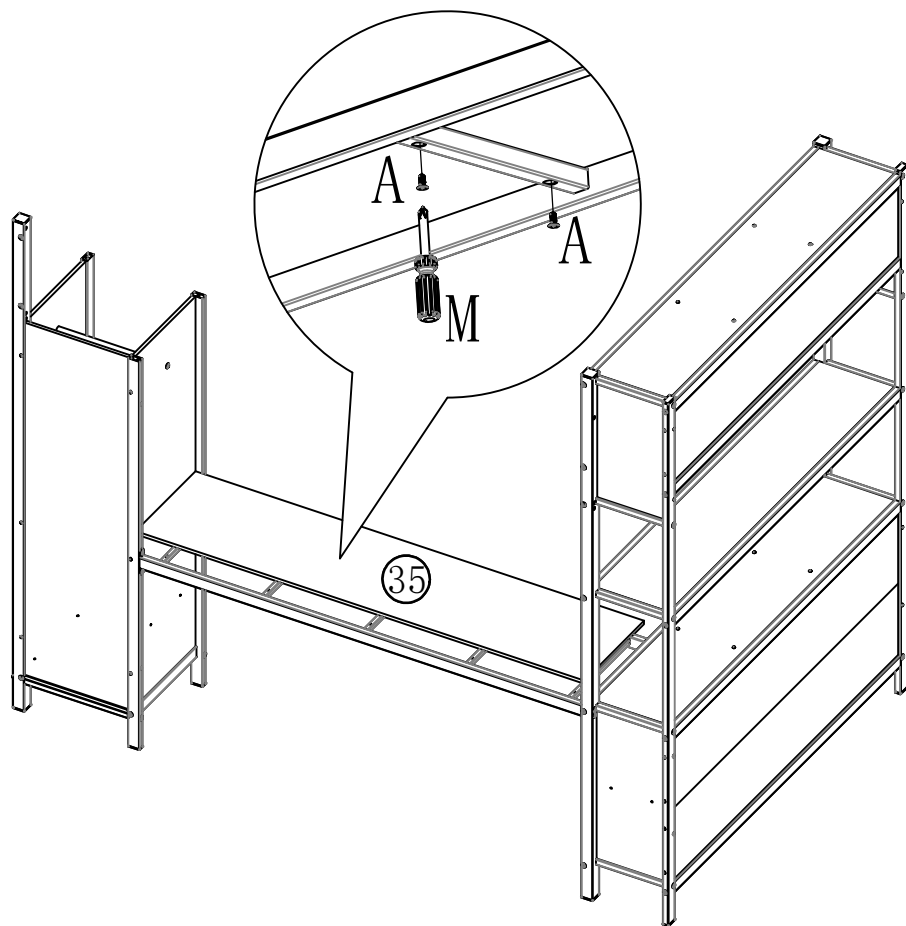

Step 10: Use hardware L,D ,F to connect #11 and #13 to the previously installed components.

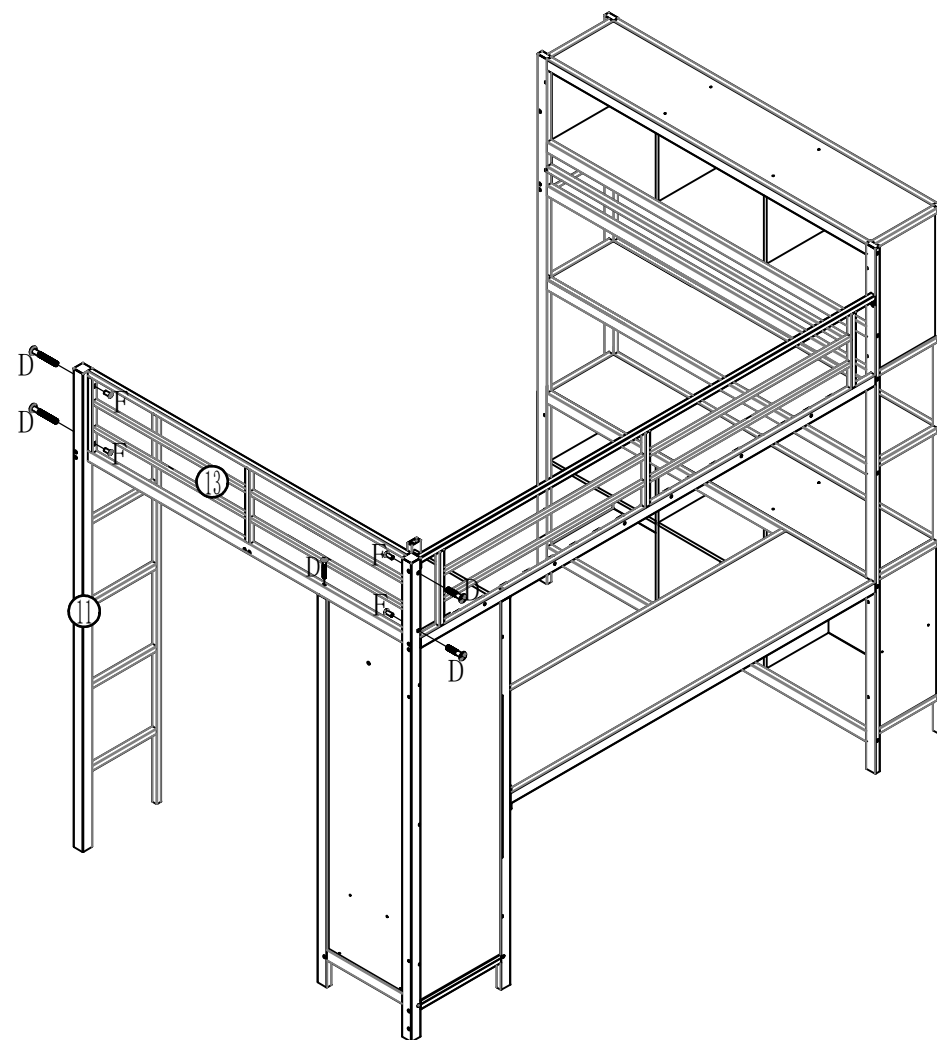

35-1pcs



A

4\*8-10PCS



M



13-1pcs



11-1pcs



D

8\*55-5PCS




F

8\*15-4PCS





L

Step11: Use hardware L,C to connect #3 to the previously installed components.

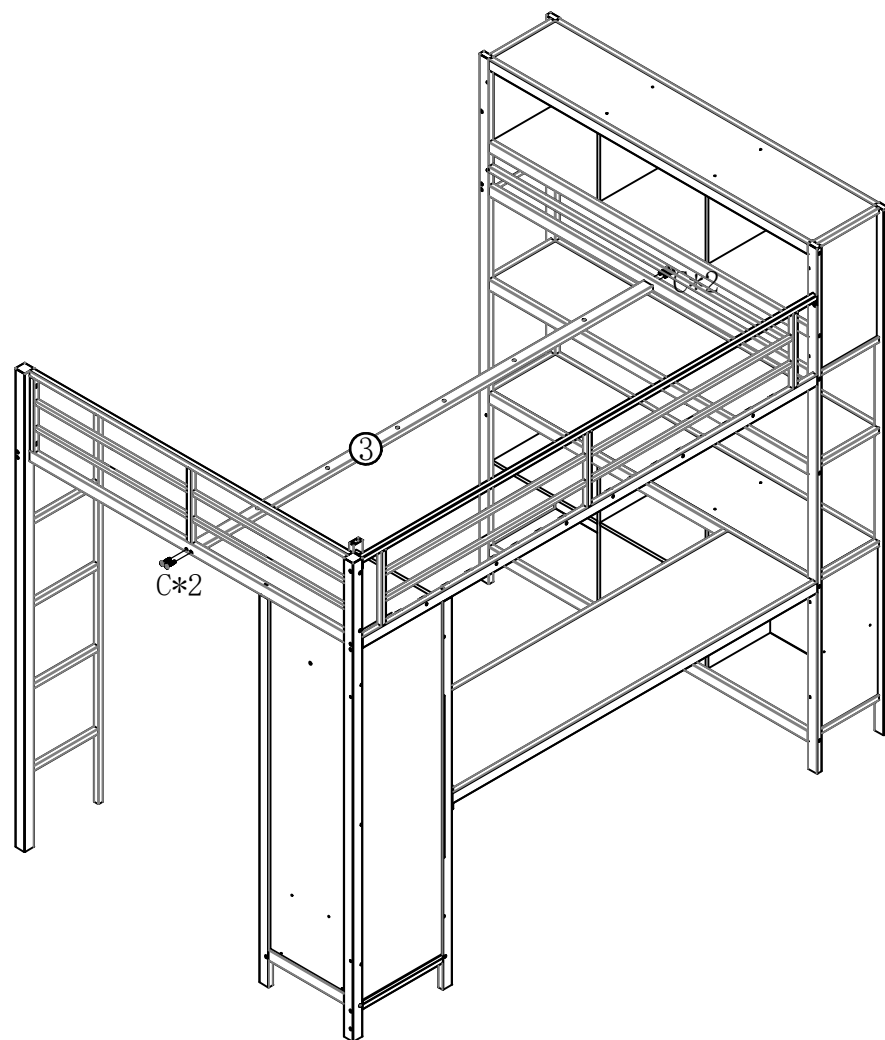


Step12: Use hardware L,C,E to connect #15 and #26 to the previously installed components.

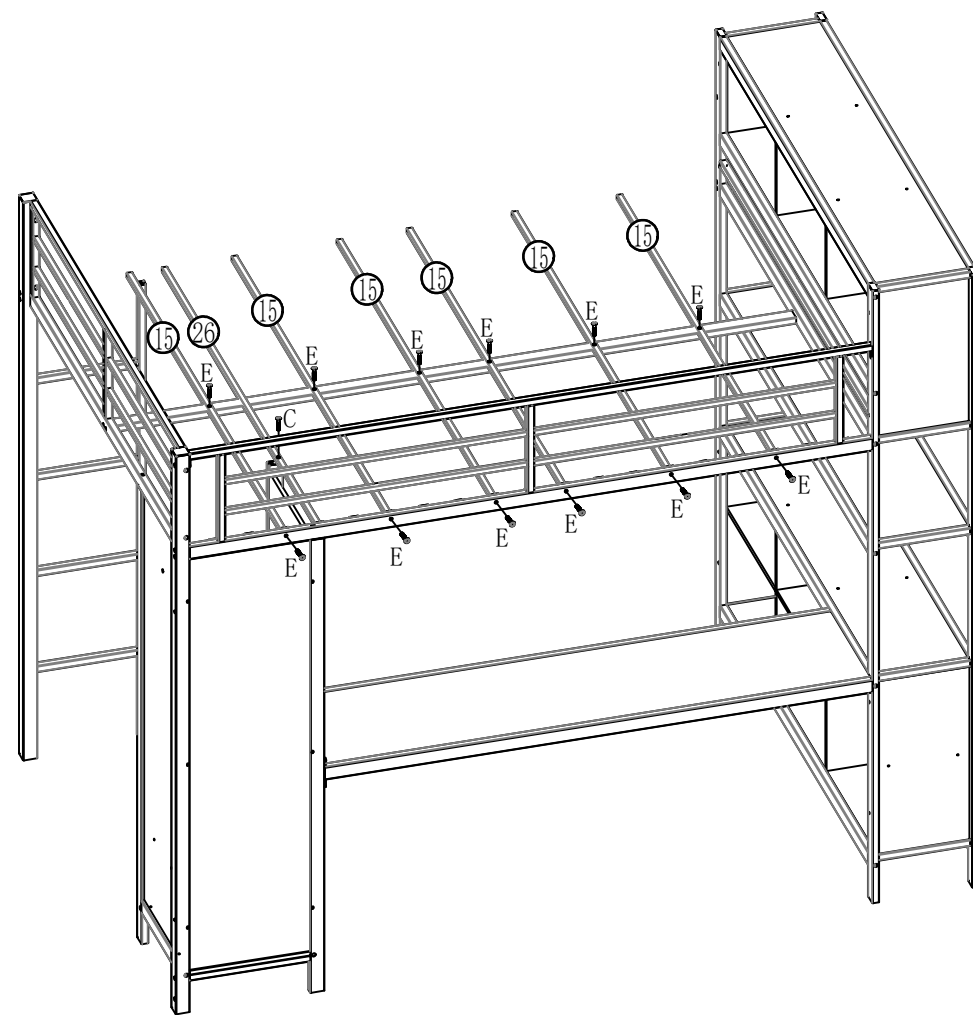

C

8\*35-4PCS



L



15-6pcs



26-1pcs



C  
8\*35-1PCS





E  
6\*30-12PCS





L

Step 13: Connect #14 to the previously installed components.

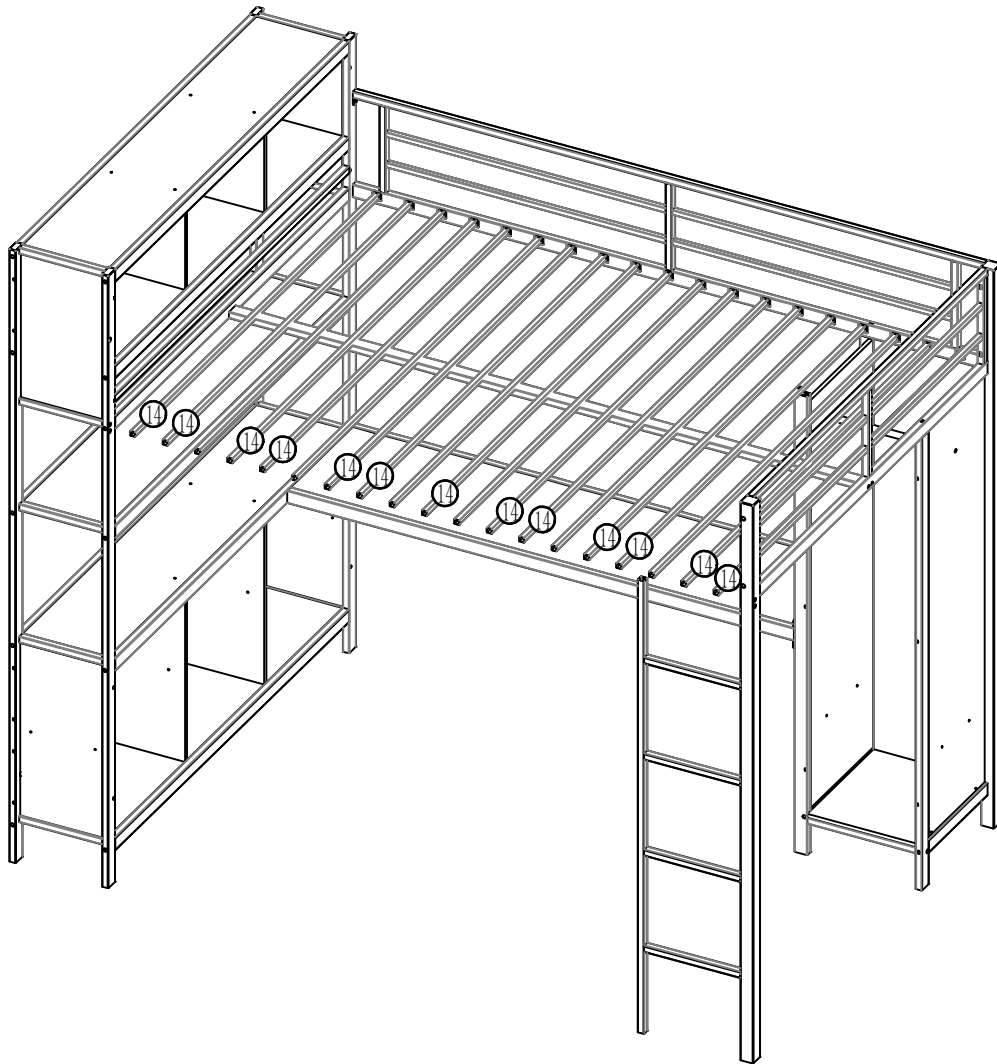





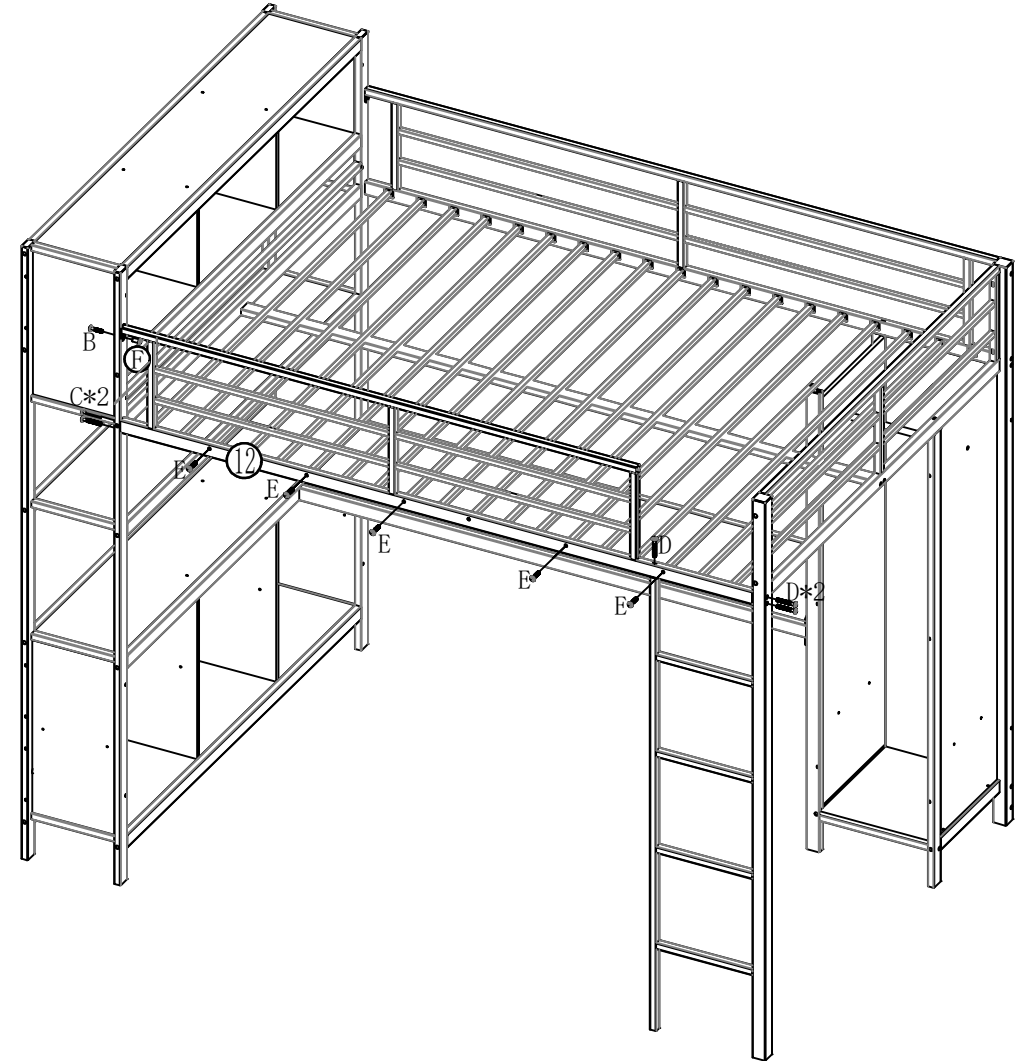

14-12pcs


Step 14: Use hardware L,C,D,E,F to connect #12 to the previously installed components.





12-1pcs

	
F 8*15-1PCS	D 8*55-3PCS
	
C 8*35-2PCS	B 8*15-1PCS
	
L	E 6*30-6PCS


Step15: Use hardware J to connect #31 and #40 to the previously installed components.

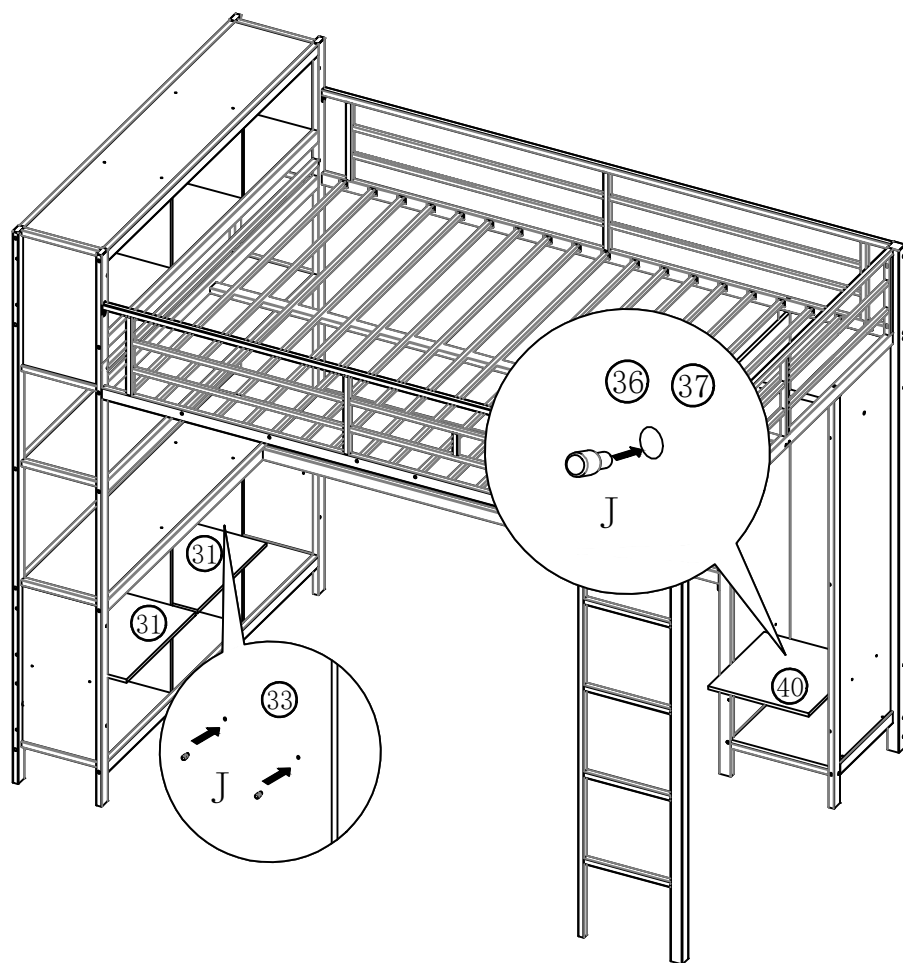


# Completed

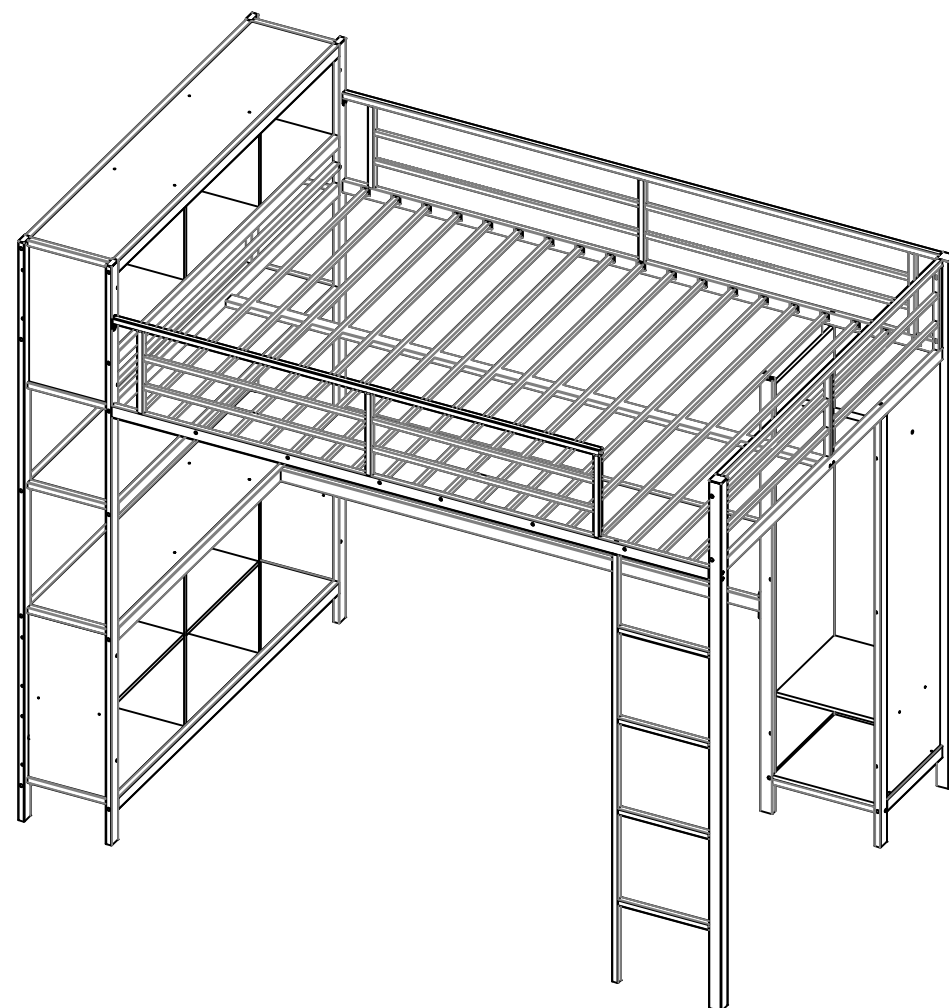

31-2pcs



40-1pcs



J

5\*10-12PCS

*Please tighten all screws before use, thank you.*