



Installation Guide

Tools Required

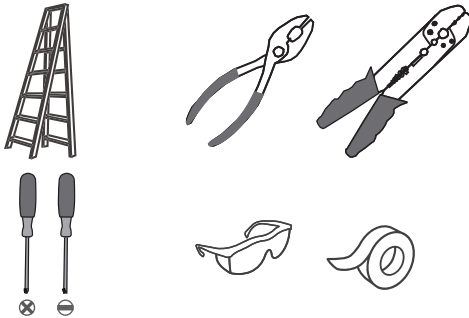

Light Source

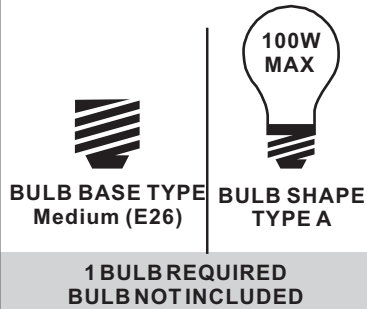

Fixture Height Adjustable 15.25" to 51.25"

⚠ Warnings and Cautions

Turn off the electricity at the circuit breaker before installation. Consult a licensed electrician if in doubt about installation.


Turn off power to the fixture and allow the bulbs to cool before replacing.

Package Contents


Preparation: Identify and inspect all parts before beginning the installation.

Missing or damaged parts? Contact your original place of purchase.


PARTS BAG



A Crossbar Assembly
x 1



B Quick Link
x 1



C Ceiling Canopy
x 1




D Outlet Box Screw
x 2




E Wire Connector
x 3




F Small Loop
x 1




G 6" L Rod
x 2



H 12" L Rod
x 2




I Fixture Body
x 1



J Shade
x 1


Table of Contents

Rods & Small Loop



STEP 1

Crossbar Assembly




STEP 2

Quick Link




STEP 3

Wiring




STEP 4

Ceiling Canopy




STEP 5

Bulb & Shade



STEP 6


STEP 1



Optional Rods
8' ceiling:
(2) 6"L + (1) 12"L rods
9' ceiling:
(2) 6"L + (2) 12"L rods

1


2

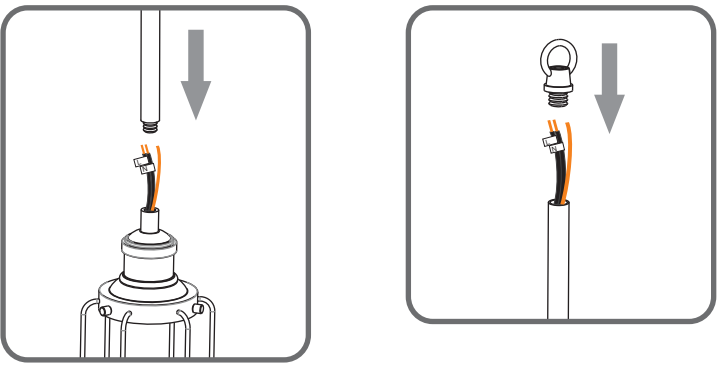

STEP 2


1

Step 1
Install crossbar assembly

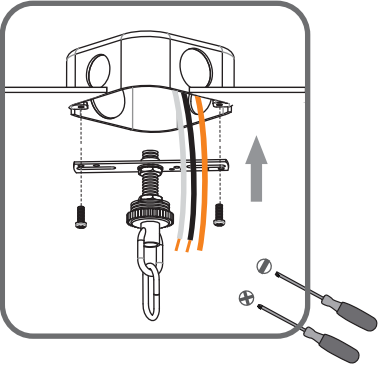


2


Step 2 - 3
Test fitting ceiling canopy to nipple

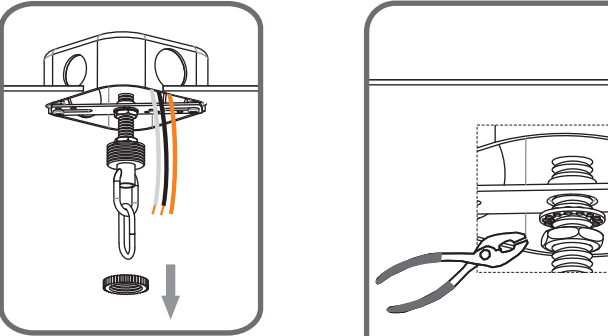

3

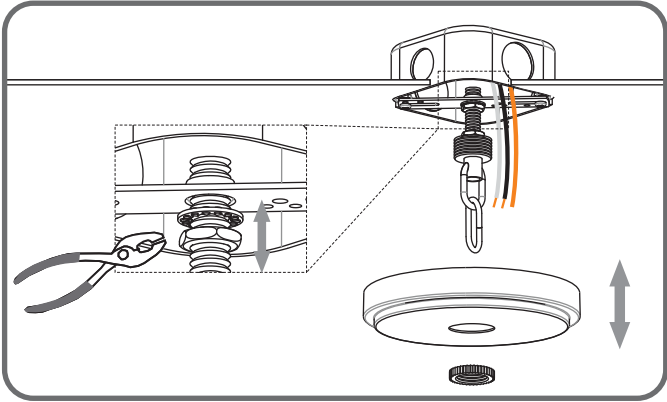


STEP 3

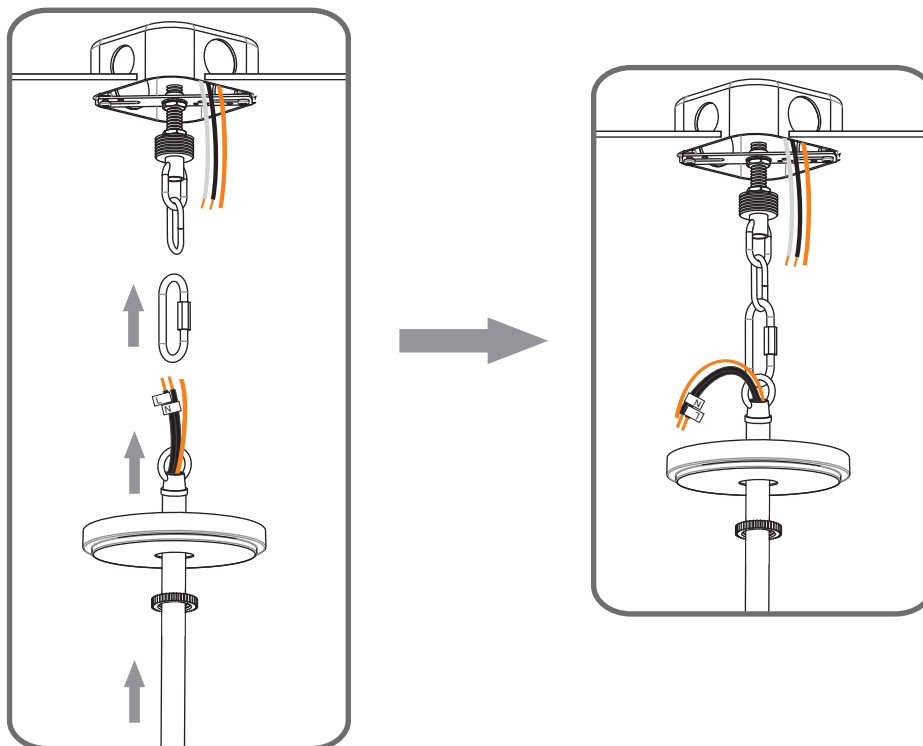


STEP 4

1


Step 1
Feed the fixture wires
through the loop

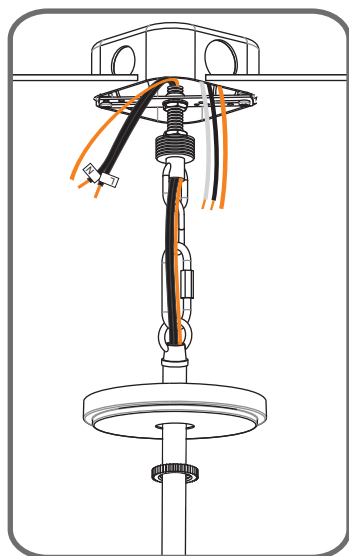

2

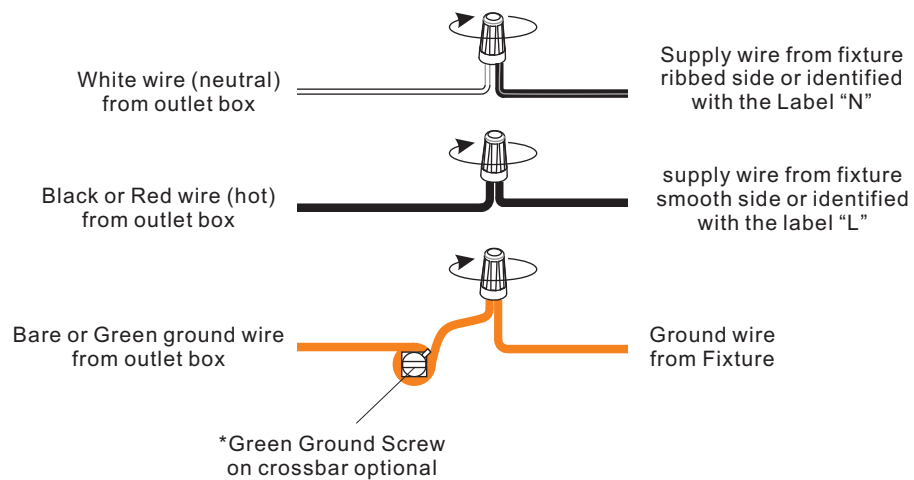

STEP 5

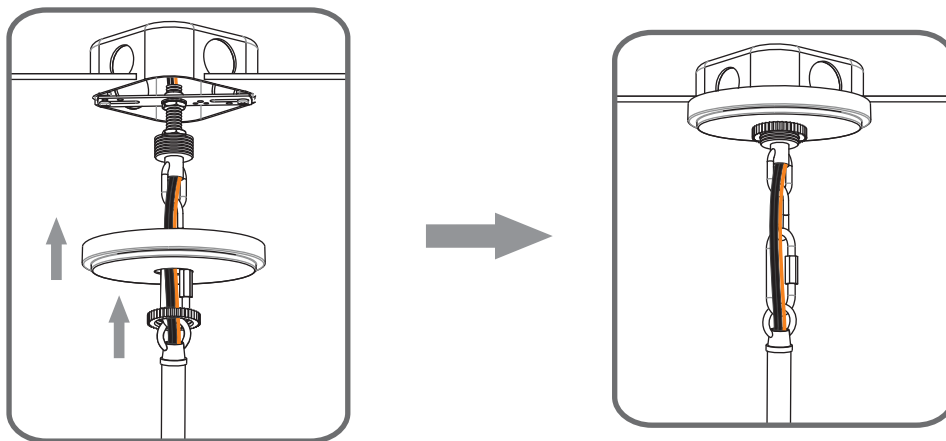

STEP 6

