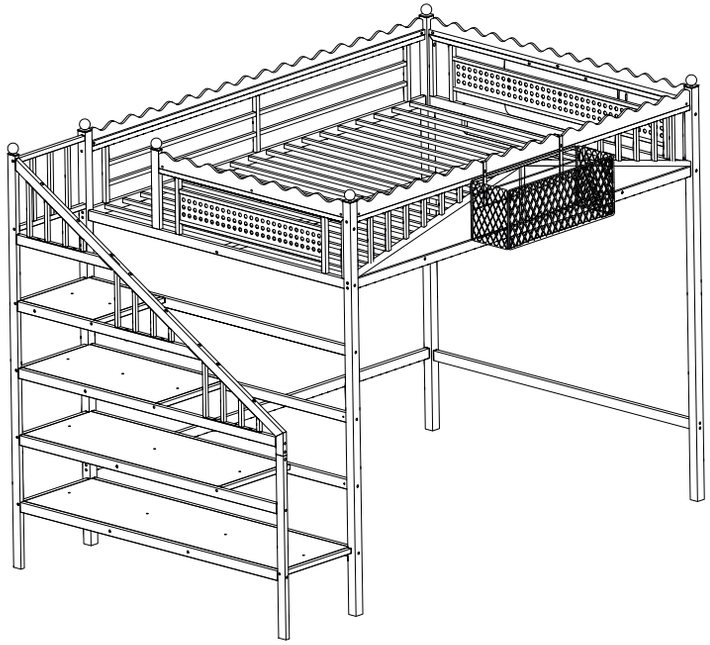
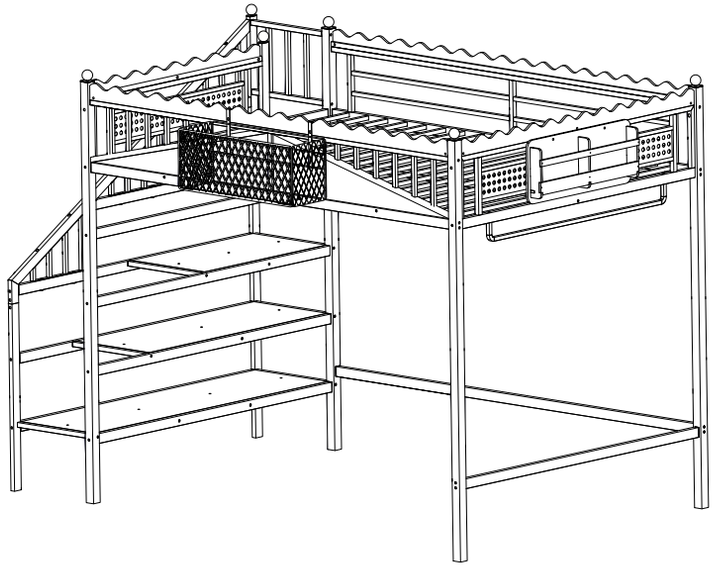
Assembly instructions





SAFETY WARNINGS AND GENERAL NOTES:


1. Follow the information on the warnings on the bunk bed end structure and on the carton. Do not remove the waming label from the bed.
2. Always use the recommended size mattress on mattress support,or both, to help prevent the likelihood of entrapment or falls.
3. Do not allow children under 6 years of age to use the upper bunk.
4. Periodically check and ensure the guardrail, ladder and other components are in their proper position, free from damage, and all connectors are tight.
5. Do not allow horseplay on or under beds.
6. Always prohibit jumping on the bed.
7. Prohibit more than one person on upper bunk.
8. Always use the ladder for entering and leaving the upper bunk.
9. Do not use substitute parts. Contact the manufacturer or dealer for replacement parts.
10. Use of a night-tight may provide added safety precaution for a child using the upper bunk.
11. Always use guardrails on both long sides of the upper bunk.
12. If the bunk bed will be placed next to a wall, the guardrail that runs the full length of the bed should be placed against the wall to prevent entrapment between the bed and the wall.
The use of water or sleep flotation mattresses is prohibited.
13. **STRANGULATION HAZARD**-Never attach or hang items to any part of the bunk bed that are not designed for use with the bed ; for example, but not limited to, hooks, belts and jump ropes.
14. Keep these instructions for future reference.
15. We recommend assembling your bunk bed on the shipping carton to protect your floor or carpet.
16. Be certain all staples are out of the box before beginning assembly on the shipping carton.
17. USE ONLY MATTRESSES WHICH ARE AS THE TABLE BELOW ON UPPER AND ON LOWER BUNKS.

Upper bed

Bed type	Length	Width	Thickness
Queen Standard	79" - 80"	60½"	6" max

18. SURFACE OF MATTRESS MUST BE AT LEAST 5"(127MM) BELOW THE UPPER EDGE OF GUARDRAILS.



















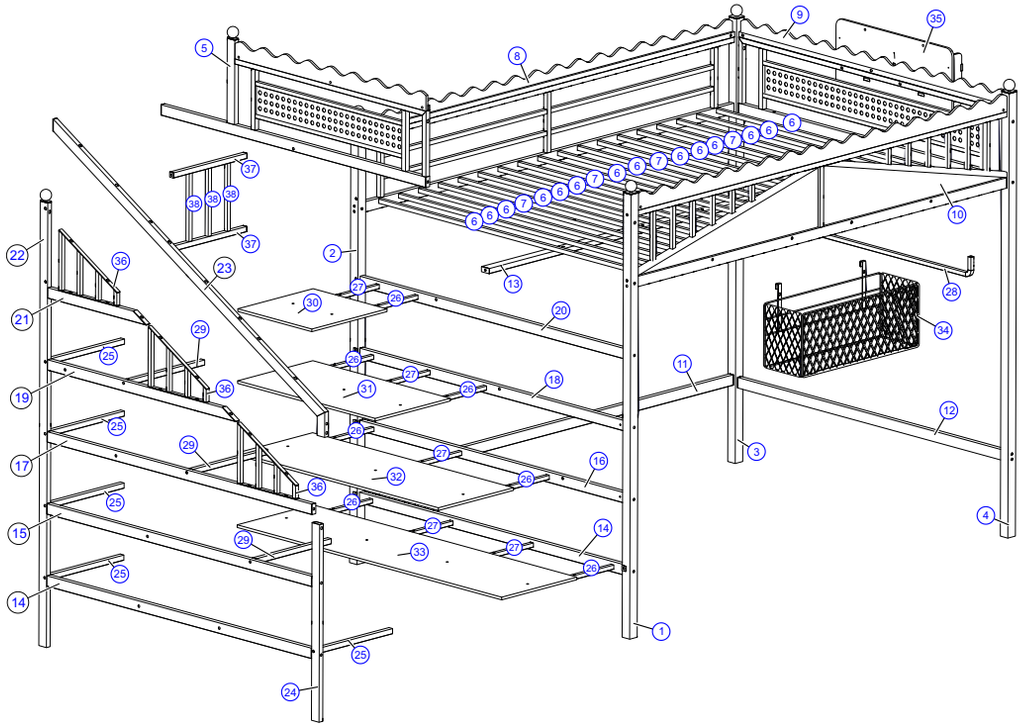
Component
distribution preview




HARDWARE LIST


A	B	C	D	E	U	G
					M6*25-2 pcs	ΦM6*10-32pcs
					H	F
M8*55-55pcs	M8*35-27pcs	M8*30-12pcs	ΦM8*16-19pcs	M6*15-18pcs	M6*20-12pcs	M8*15-14pcs
Q	S	N		Y	L	
40*40FQ-4pcs	M2.6*18-12pcs	20*40-2pcs		40*40M8-6pcs	M5*25-2pcs	
T		M	P		W	k
40*40F-4pcs	Z-1pcs	20*40-2pcs	18*60 -2pcs	O-16pcs	M4*25-2pcs	2pcs

List of components


				 	 		
1-1pcs	2-1pcs	3-1pcs	4-1pcs	8-1pcs 10-1pcs	6-16pcs 7-4pcs	11-1pcs	
 							
5-1pcs 9-1pcs	12-1pcs	13-1pcs	14-2pcs	15-1pcs	16-1pcs	17-1pcs	18-1pcs
							 
19-1pcs	20-1pcs	21-1pcs	22-1pcs	23-1pcs	24-1pcs	25-5pcs	26-7pcs	27-5pcs	28-1pcs
				 			
29-3pcs	34-1pcs	35-1pcs	36-3pcs	37-2pcs 38-3pcs			

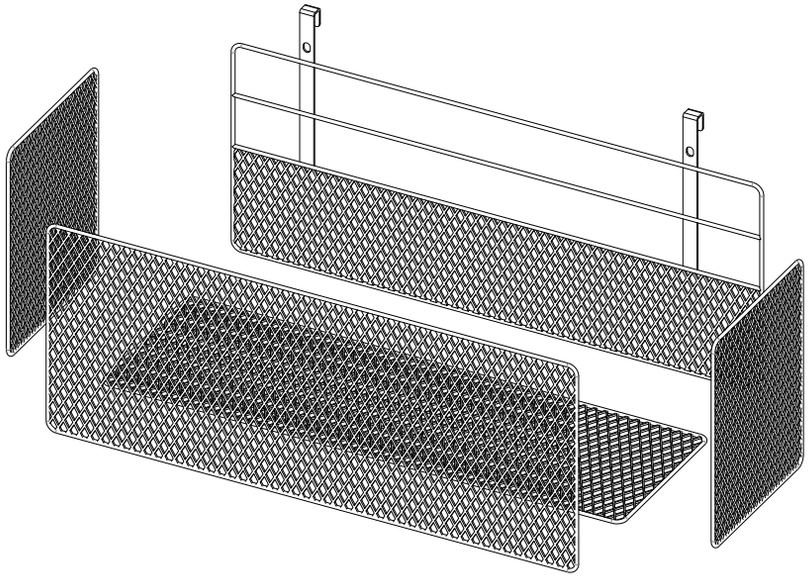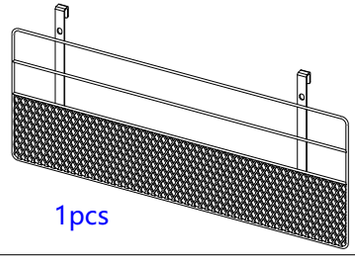Component List







1pcs



1pcs





2pcs

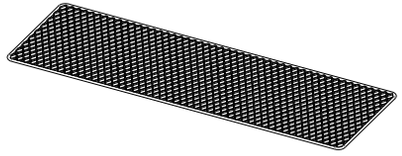

1pcs

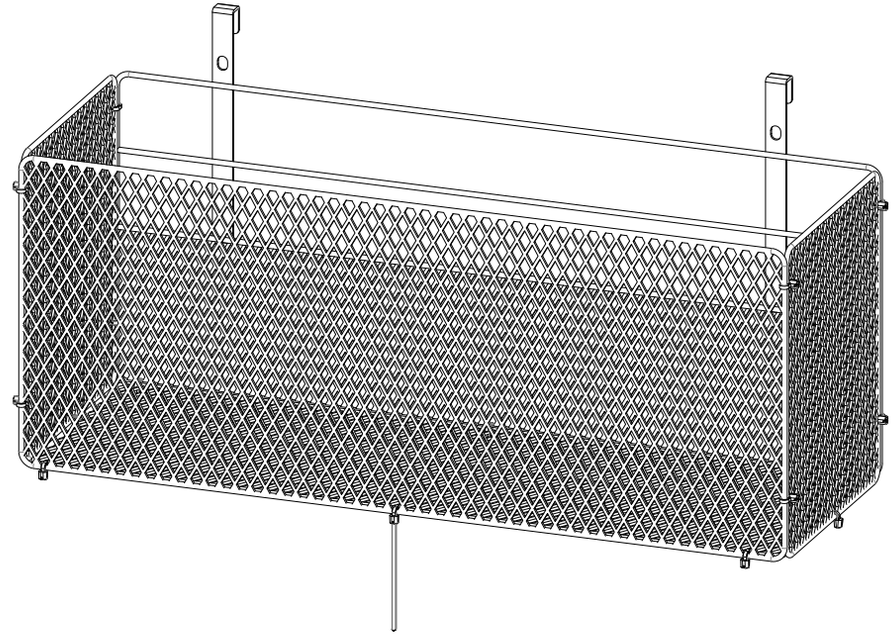
Use a customized tie to bundle all the parts of the No. 34 component together, and use the tool to cut off the tail length of the tie.







O-16pcs

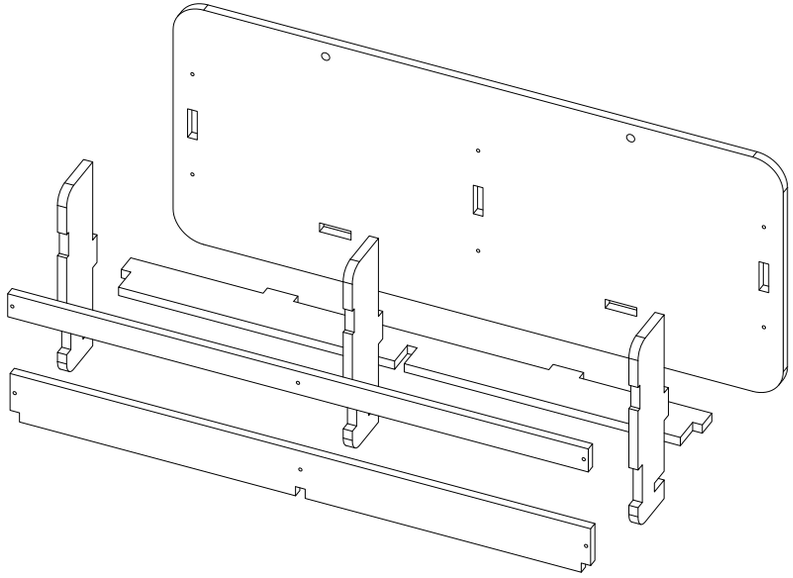Component List







1pcs




1pcs



3pcs




1pcs



1pcs

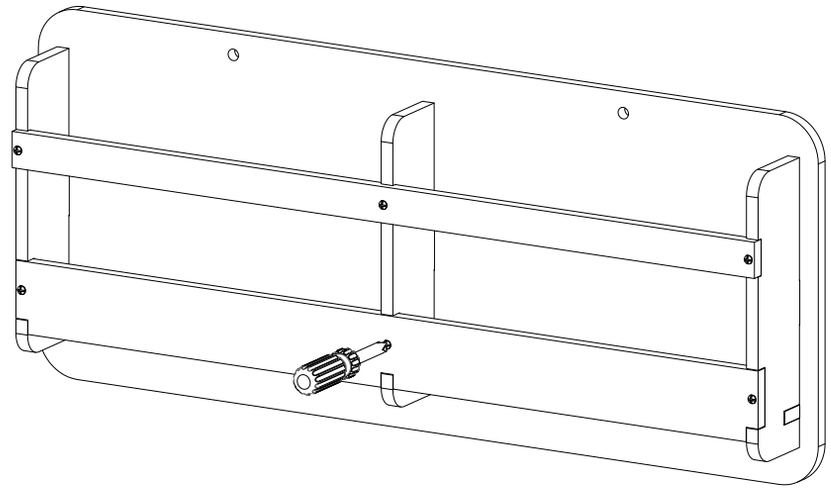
Use screw Z, S accessories to combine the parts required for the No. 35 component.





S



M2.6*18-12pcs








Z

1pcs

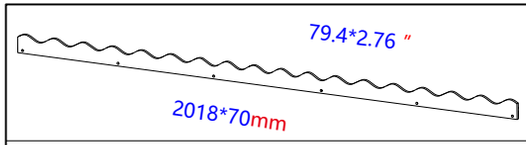
Board list



	
39-2pcs	40-1pcs

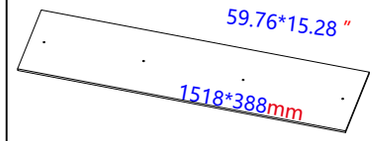		
41-1pcs	30-1pcs	31-1pcs
		
32-1pcs	33-1pcs	


A total of 8 pcs

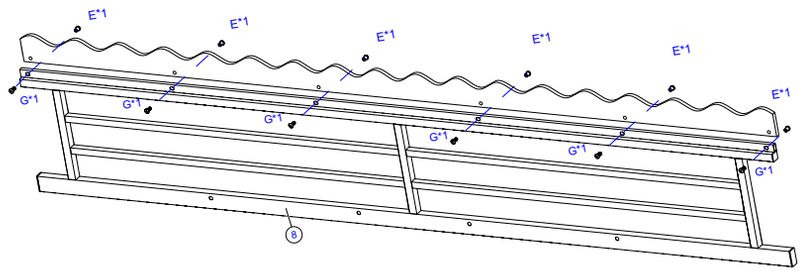

Step 1: Use hardware E, G, L to connect #8 and #39 together. Get 8 # components




				
8-1pcs	39-1pcs	E M6*15-6pcs	G ΦM6*10-6pcs	L

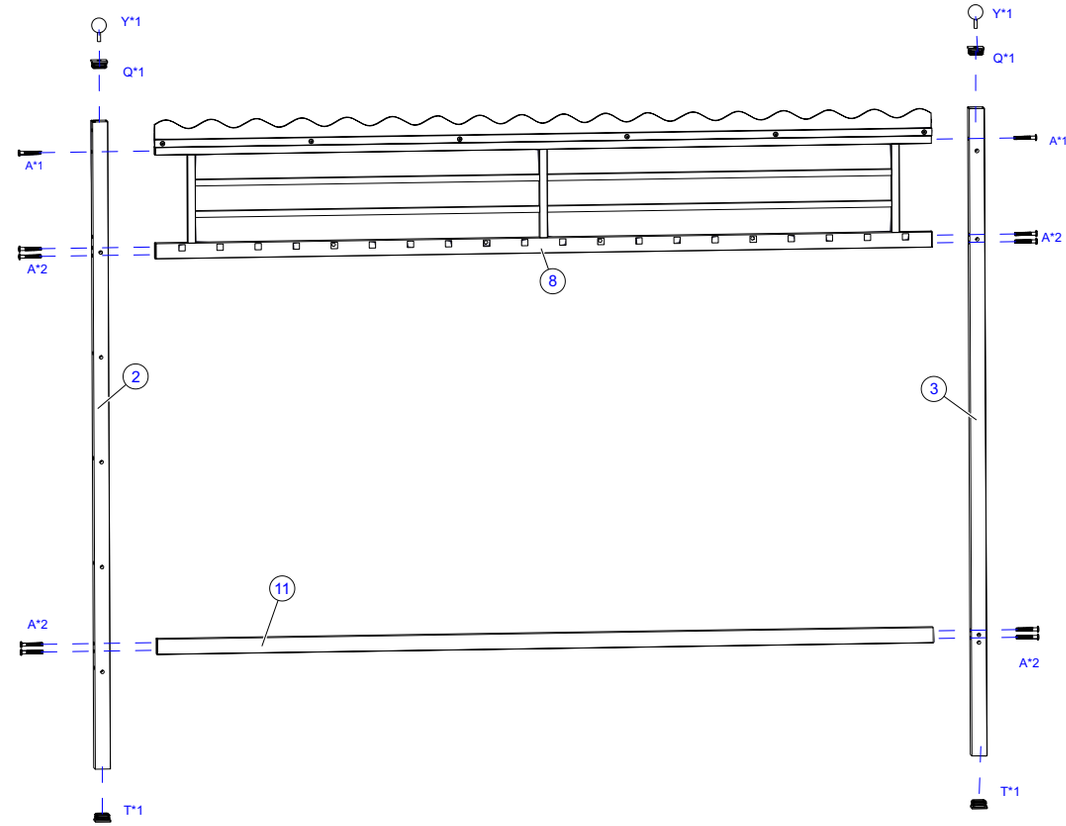Step 2: Use hardware A, T, Q , Y to connect #2 #3 #11and #8 components together.





			 T	 Y
2-1 pcs	3-1 pcs	1pcs 8 # components	40*40F-2pcs	20*40-2pcs
		11-1pcs	 Q 40*40FQ-2pcs	 A M8*55-10pcs

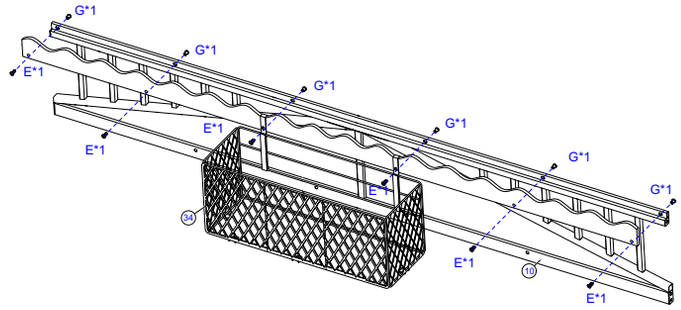
Step 3: Use hardware E, G , L to connect #10 #34 and #39 together.
Get #10 components






W


 10-1pcs	 79.4*2.76 〃 2018*70mm 39-1pcs	 34-1pcs	 E M6*15-6pcs	 G ΦM6*10-6 pcs

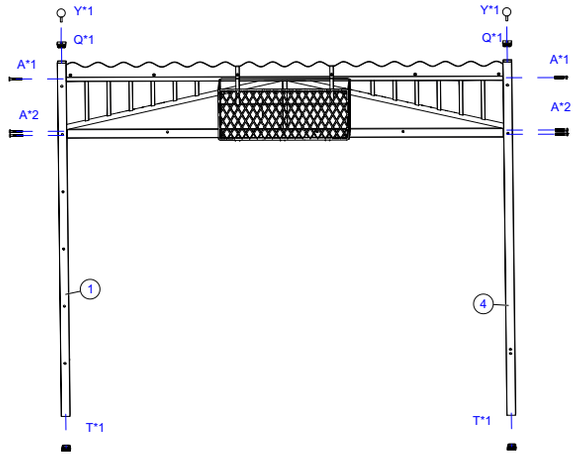Step 4: Use hardware A, L, T, Q , Y to connect #1 #4 and #10 components together.






 1-1 pcs	 1 pcs #10 components	 Q 40*40FQ-2pcs	 A M8*55-6pcs
 4-1 pcs	 T 40*40F-2pcs	 Y 20*40-2pcs	 L

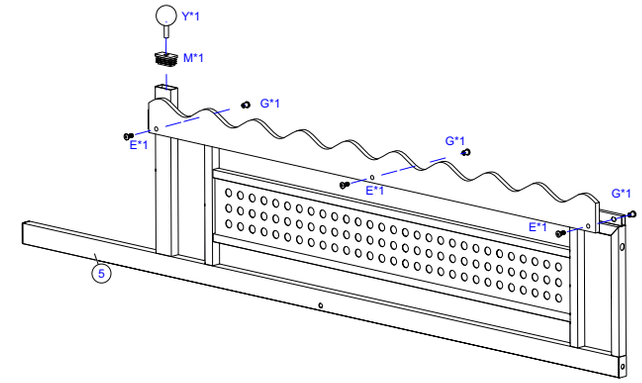
Step 5: Use hardware E, G, W, M , Y to connect #5 #41 together.





W

 5-1pcs	 44.8*2.76 〃 1138*70mm 41-1pcs	 M 20*40-1pcs	 Y 40*40-1pcs	 E M6*15-3pcs	 G ΦM6*10-3pcs

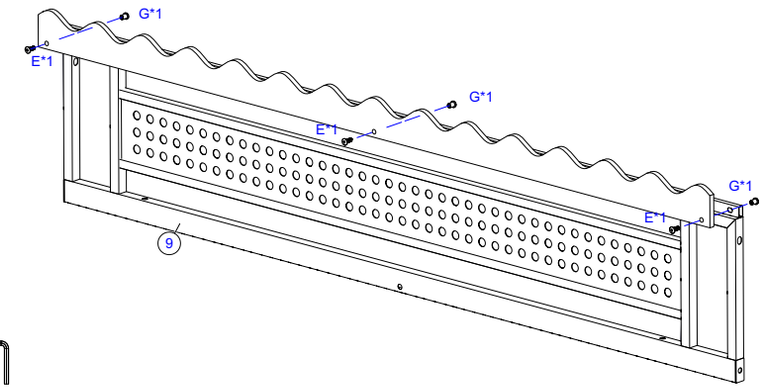
Step 6: Use hardware E, G, W to connect #9 #40 together.



W


 9-1pcs	 59.76*2.76 〃 1518*70mm 40-1pcs	 E M6*15-3pcs	 G ΦM6*10-3pcs


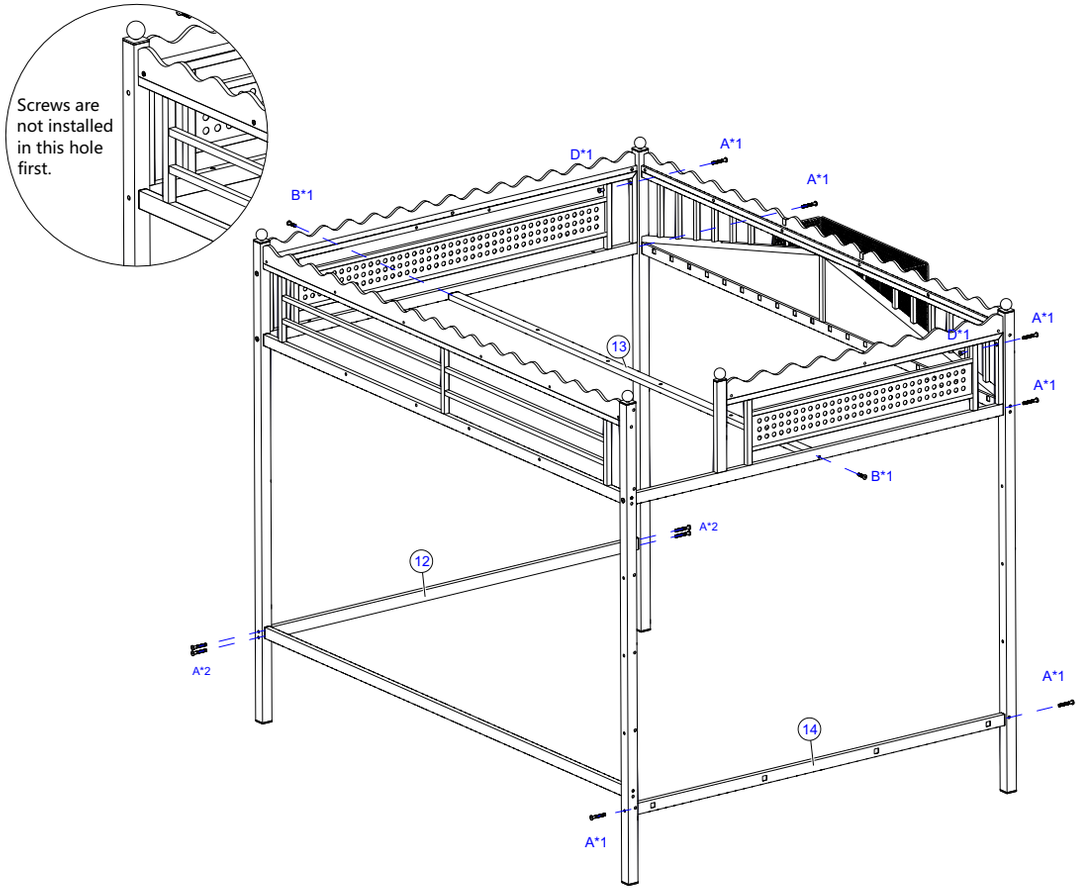
Step 7 : Use hardware A, B, D,L to connect #12 #13 #14 together.




 12-1pcs	 13-1pcs	 14-1pcs	 A M8*55-10pcs	 B M8*35-2 pcs
			 D ΦM8*16-2pcs	 L

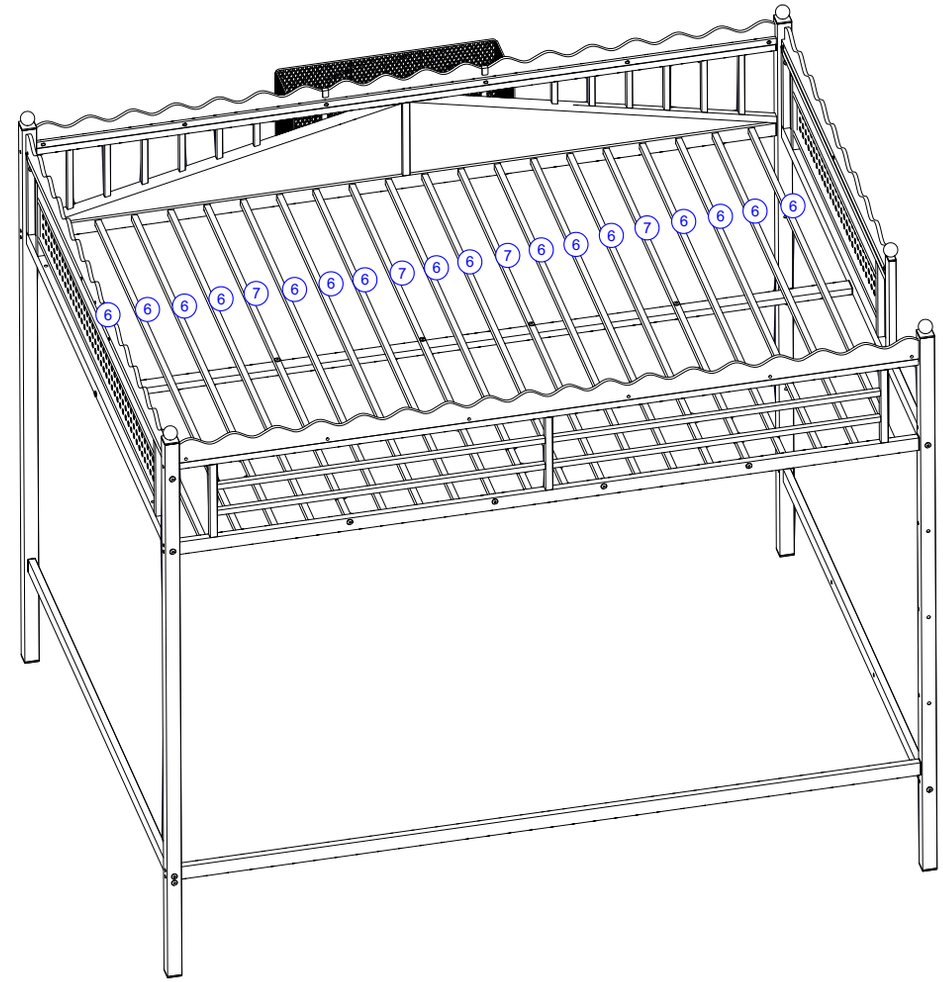Step 8:Use #6 and #7 to insert into the corresponding square hole of #8 and #10.



			
6-16pcs	7-4pcs		

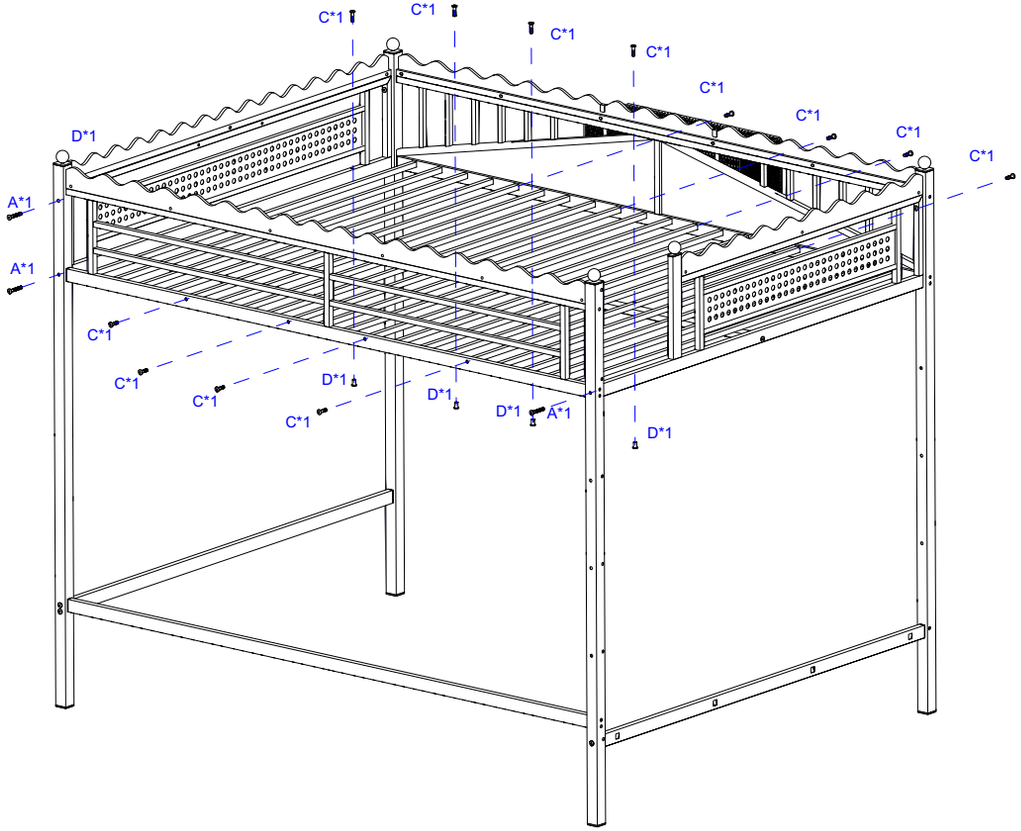
Step 9:Use hardware A,L to tighten the #2,#3 and #5,#9 connections, hardware C ,L to tighten the #7,#8 and #10 connections,and hardware C,D,L to tighten the #7 and #13 connections.



HARDWARE LIST

L	A	C	D
	M8*55-3pcs	M8*35-12pcs	ΦM8*16- 5pcs

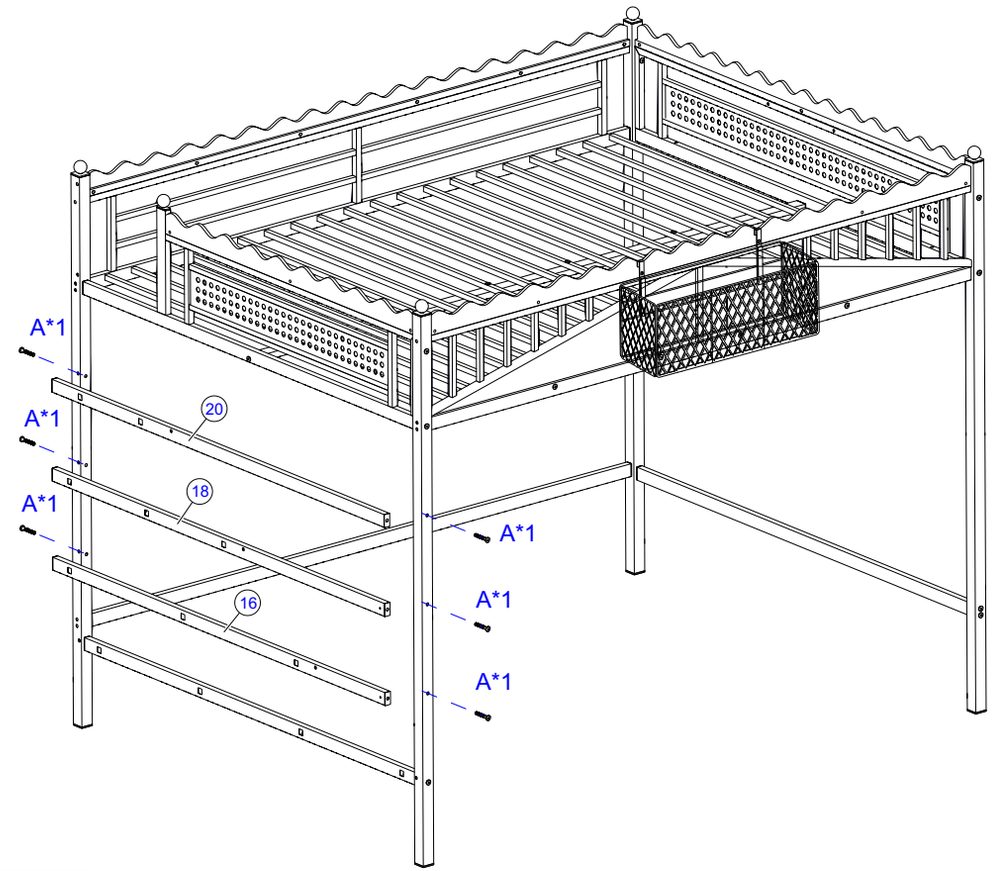Step 10:Use hardware A,L to connect #16,#18, #20 together.






L


16-1pcs	18-1pcs	20-1pcs	A
			M8*55-6pcs

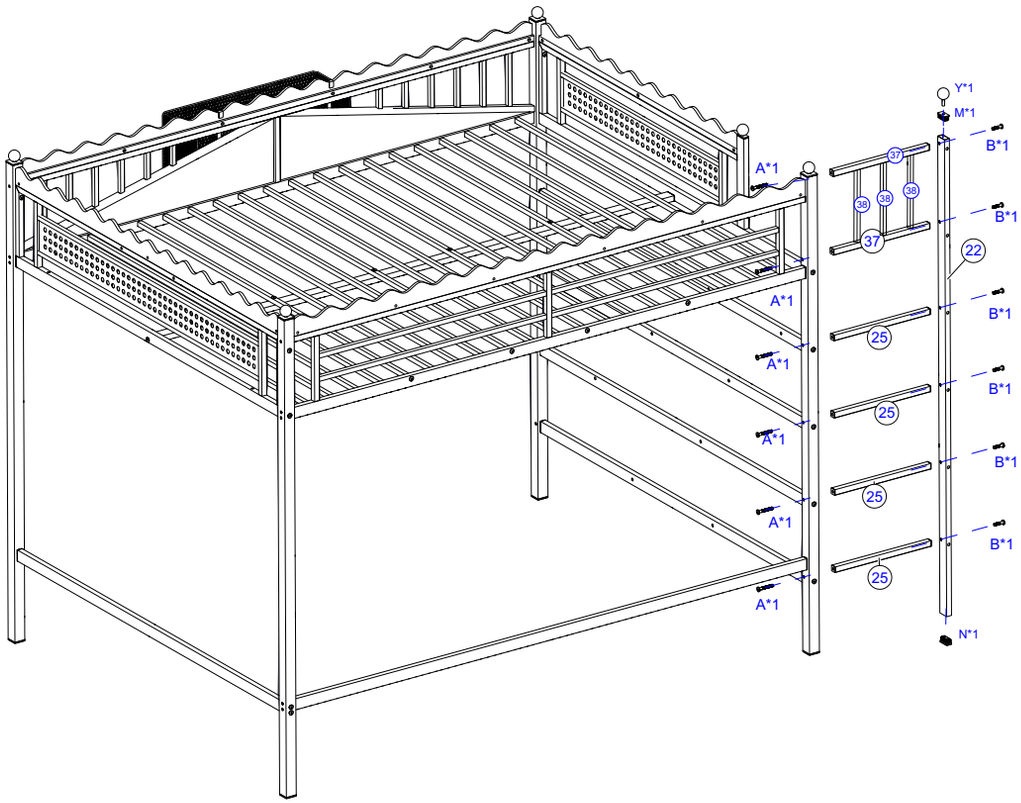Step 11:Use hardware A,B,L to connect #22,#37,#38,#25 together.




22-1 pcs	37-2pcs	M 20*40-1pcs	A M8*55-6pcs	B M8*35-6pcs
25- 4pcs	38-3pcs	N 20*40-1pcs	Y 20*40-1pcs	L

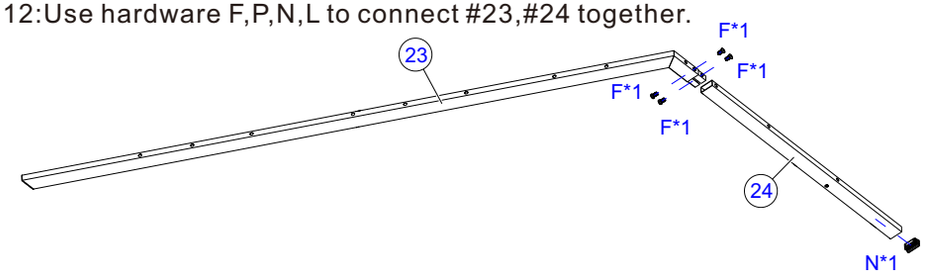Step 12:Use hardware F,P,N,L to connect #23,#24 together.




23-1pcs	24-1pcs	P 18*60 -2pcs	N 20*40-1pcs	F M8*15-4pcs

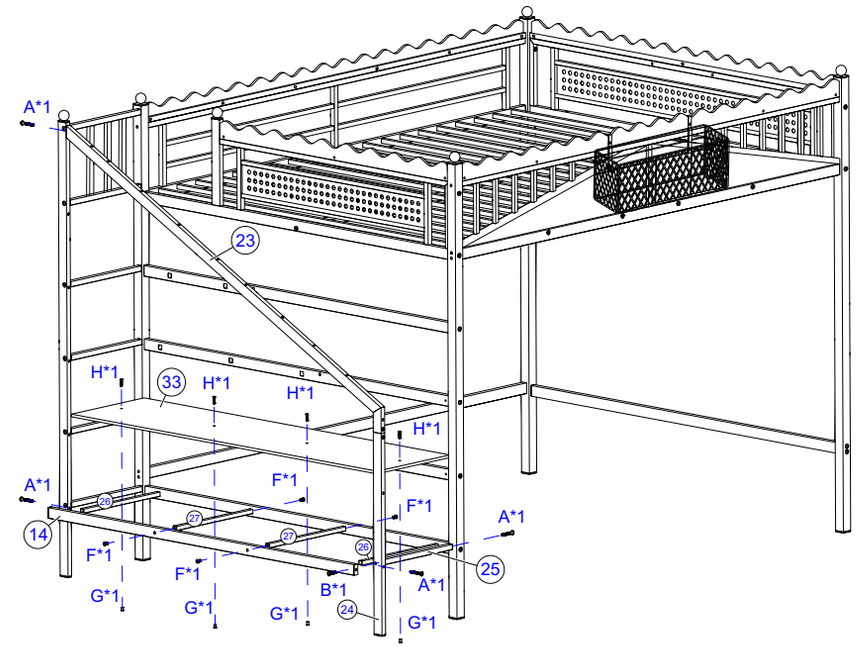Step 13:Use hardware A,B,F,H,G to connect #14,#25,#26,#27,#33 together.




59.76*15.28 " 1518*388mm 33-1 pcs	26- 2pcs	14-1 pcs	B M8*35-1 pcs	F M8*15-4pcs
25- 1pcs	27- 2pcs	A M8*55-4pcs	H M6*20-4 pcs	G ΦM6*10-4 pcs

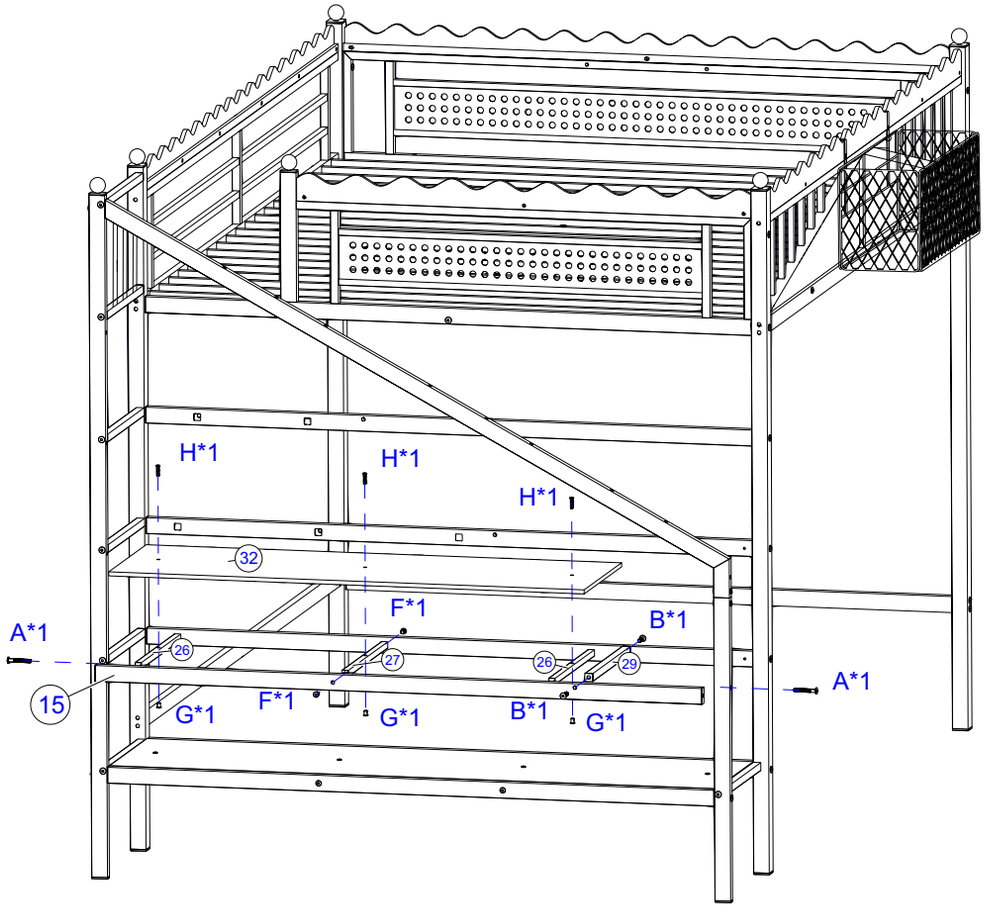Step 14:Use hardware A,B,F,H,G to connect #15,#26,#27,#29,#32 together.




46.85*15.28 " 1190*388mm 32-1 pcs	26- 2pcs	15-1 pcs	B M8*35-2 pcs	F M8*15-2pcs
29- 1pcs	27- 1pcs	A M8*55-2 pcs	H M6*20-3 pcs	G ΦM6*10-3 pcs

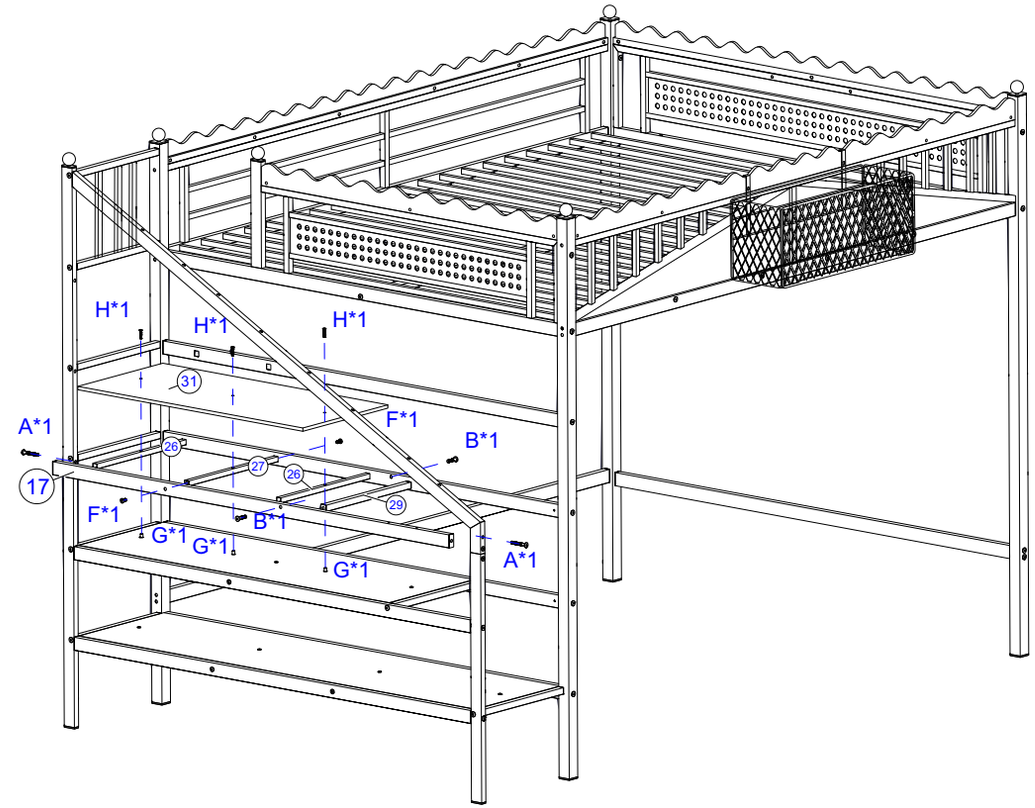Step 15:Use hardware A,B,F,H,G to connect #17,#26,#27,#29,#31 together.




33.94*15.28 " 862*388mm 31-1 pcs	26- 2pcs	17-1 pcs	B M8*35-2 pcs	F M8*15-2pcs
29- 1pcs	27- 1pcs	A M8*55-2 pcs	H M6*20-3 pcs	G ΦM6*10-3 pcs

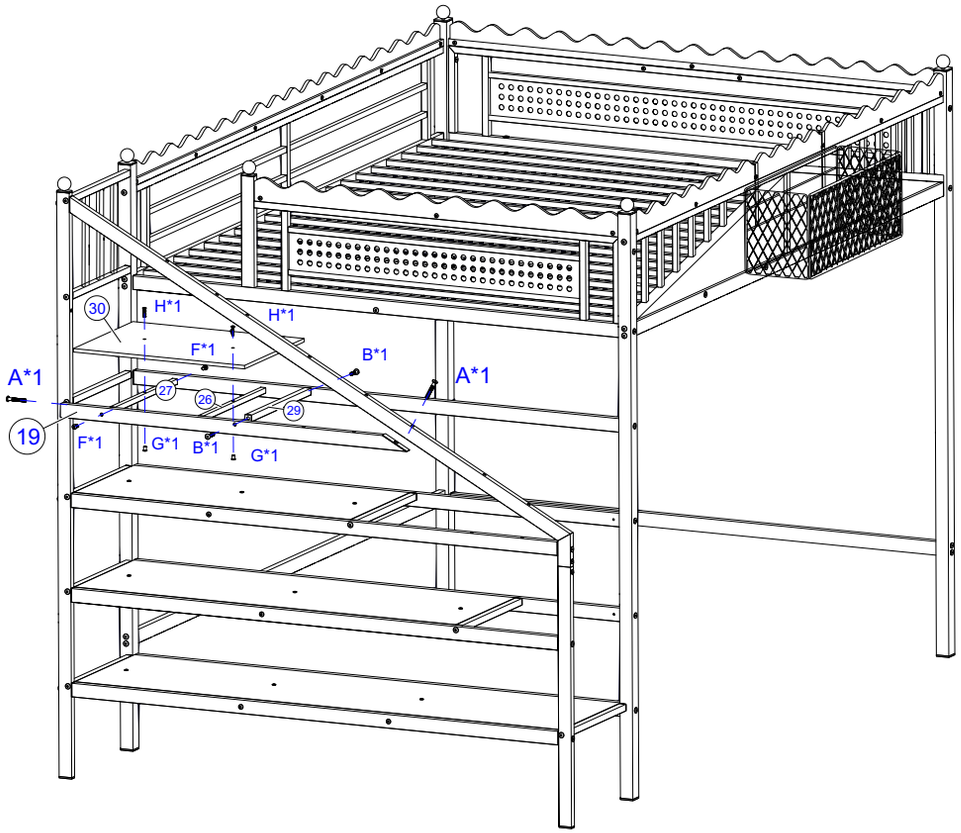Step 16:Use hardware A,B,F,H,G to connect #19,#26,#27,#29,#30 together.




30-1 pcs	26- 1pcs	19-1 pcs	B M8*35-2pcs	F M8*15-2pcs
29- 1pcs	27- 1pcs	A M8*55-2pcs	H M6*20-2 pcs	G ΦM6*10-2 pcs

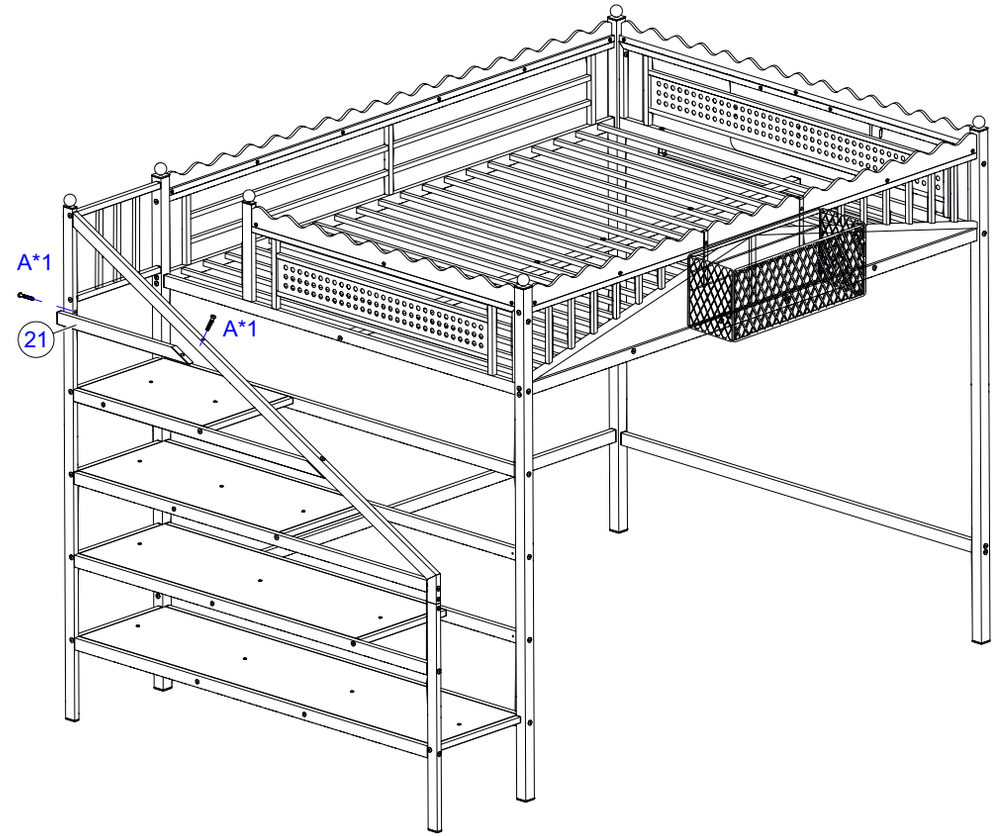
Step 17:Use hardware A,L,to connect #21 together.




21-1pcs	A M8*55-2pcs	L	

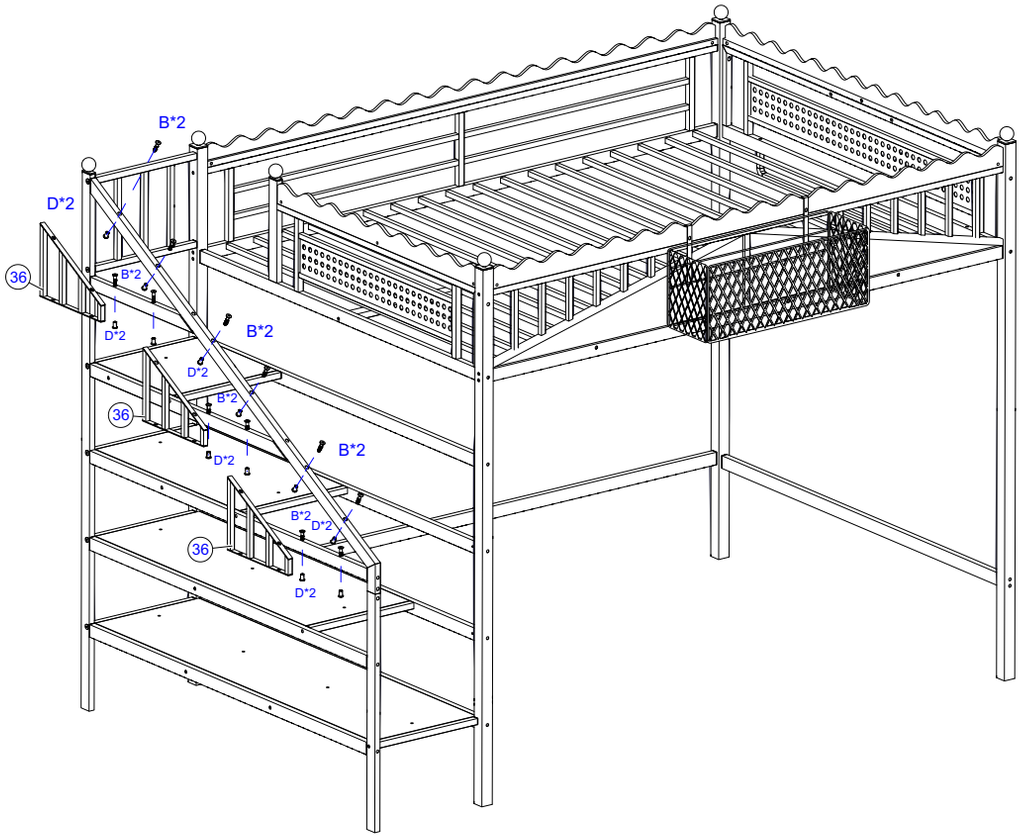
Step 18:Use hardware B,D,L to connect #36 together.



			
36-3pcs	B M8*35-12pcs	D ΦM8*16-12 pcs	L

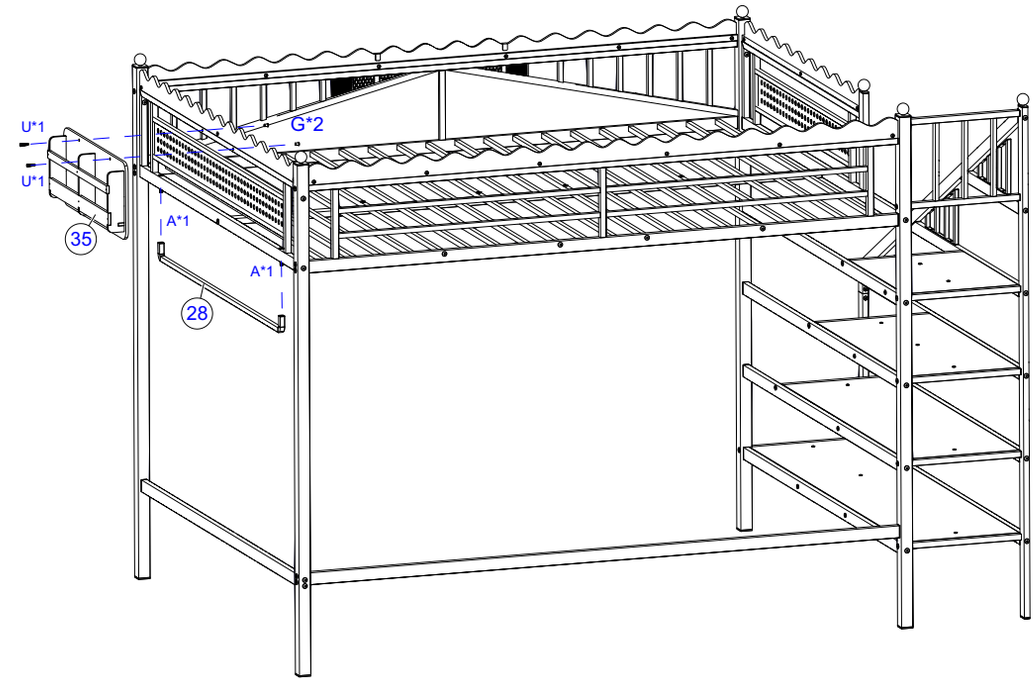
Step 19:Use hardware A,U,G to connect #28,#35 together.




				
35-1pcs	28-1pcs	A M8*55-2pcs	G ΦM6*10-2pcs	U M6*25-2pcs

Completed attic bed

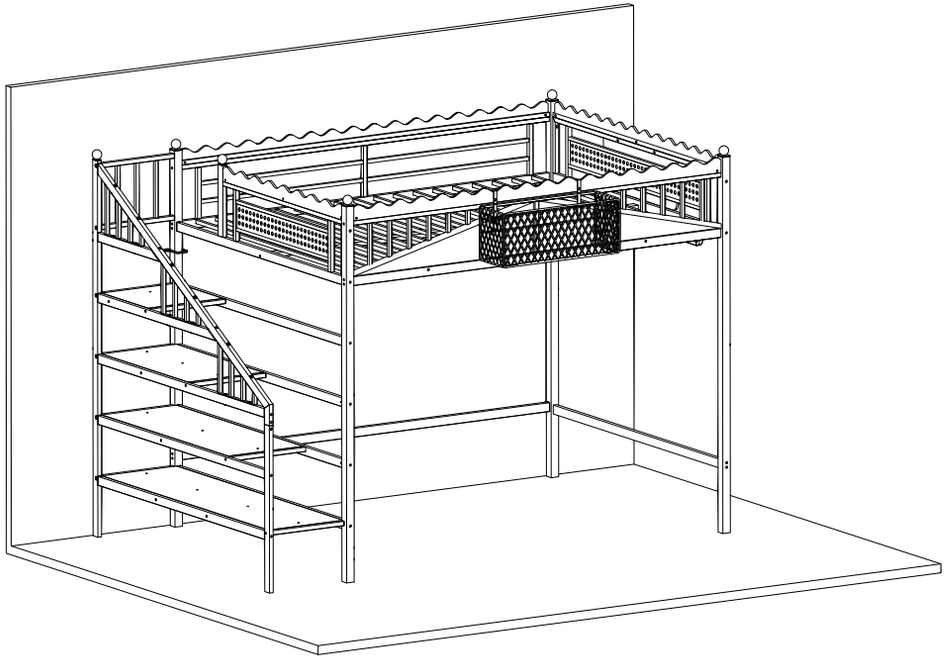Fix the wall, prevent movement, selective installation





Note: Tighten all the steps before use, thank you.

Recyclable garbage