
INSTALLATION MANUAL


CHANDELIER




TOOLS REQUIRED

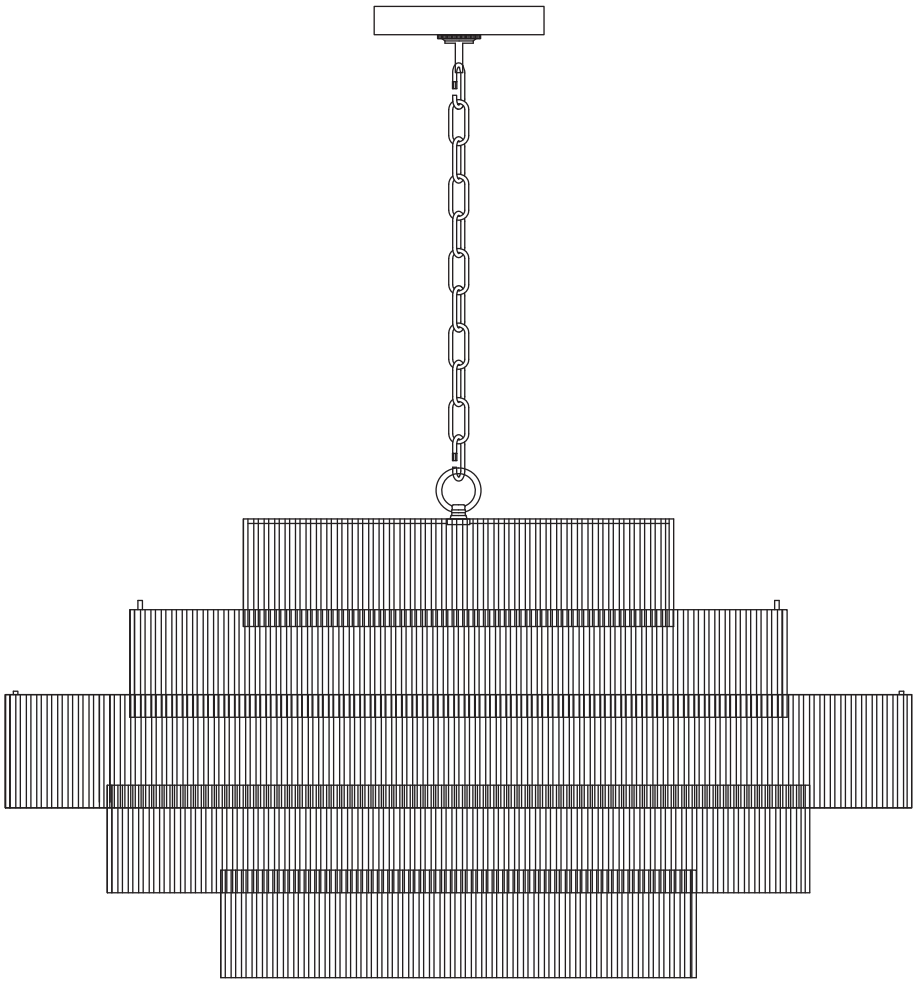


Ladder



Pliers



Wire Strippers




Screwdrivers



Power Drill

PACKING LIST

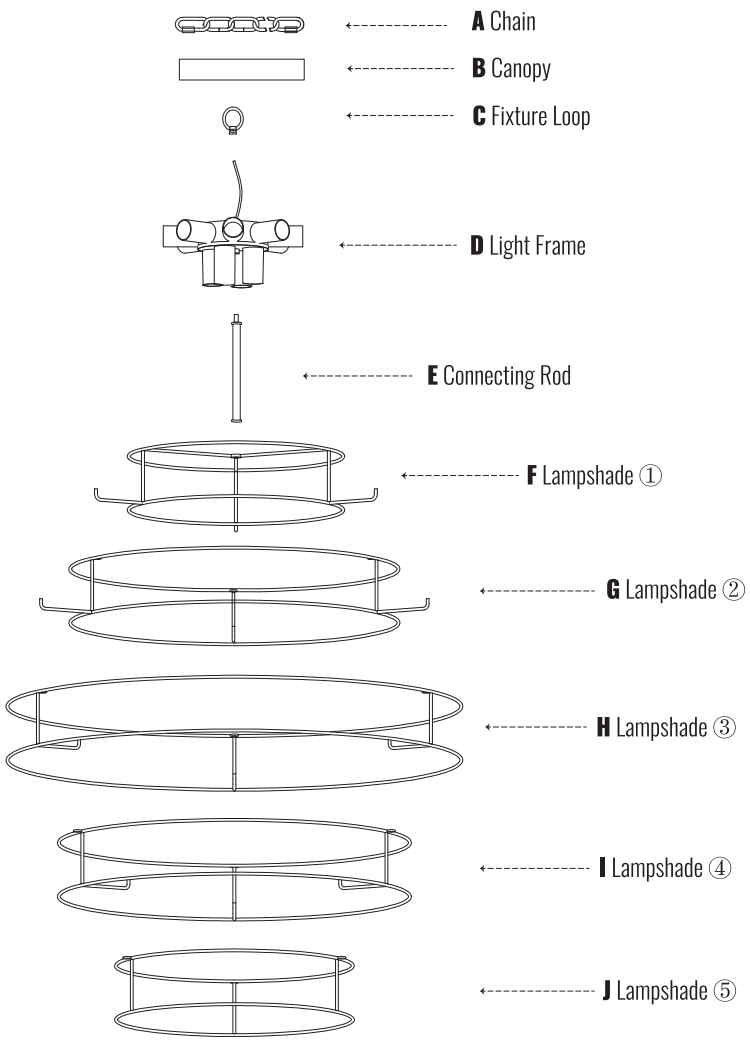

INSTALLATION KIT


AA 1×  Mounting Bracket	**BB** 3×  Wire Nut	**CC** 2×  Outlet Box Screw	**DD** 1×  Loop Ring
EE 2×  Quick Link		 Gloves 4×	

Note:
1.Some extra hardware may be included. The quantity listed above is the number required for installation.
2.EE is pre-installed on the Chain (A).

INSTALLATION


1.Install the Mounting Bracket

Take off the screws from the outlet box, and secure the Mounting Bracket (AA) onto the box with the screws taken off or Outlet Box Screw (CC).

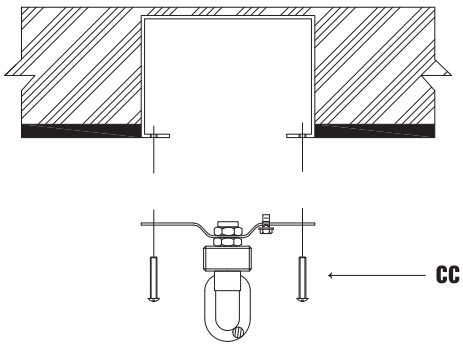


2.Install the Light Frame

Step 1: Pass the power cord from the Light Frame (D) through the Connecting Rod (E), the round holes of the Lampshade① (F), and finally through the Fixture Loop (C).
Step 2: Tighten the Connecting Rod (E) to both the Light Frame (D) and the Fixture Loop (C).

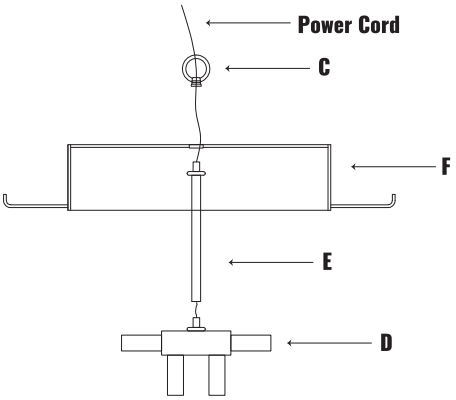


3.Install the Fixture Body

Step 1: Pass the power cord through the Chain (A), Loop Ring (DD), and the Canopy (B).
Step 2: Open the Quick Link (EE) on Chain (A), then connect the Quick Link (EE) on both ends of Chain (A) to the Mounting Bracket (AA) and the Fixture Loop (C), and finally lock the Quick Link (EE) tightly.
Step 3: Hang the Lampshades in the following order: G → H → I → J.

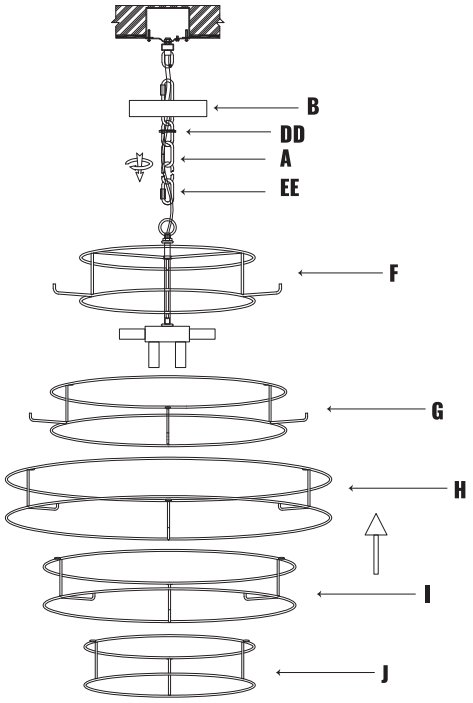


4.Connect the Wires

Step 1: Wrap the ground wire from the outlet box around the Ground Screw on the Mounting Bracket (AA), and then connect the ground wire from the fixture to the ground wire from the outlet box.
Step 2: Connect the wires from the fixture to the house supply wires with Wire Nut (BB), neutral wire (white) to neutral wire, and hot wire (black) to the hot wire. Wrap the connection with electrical tape.
Step 3: Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other.

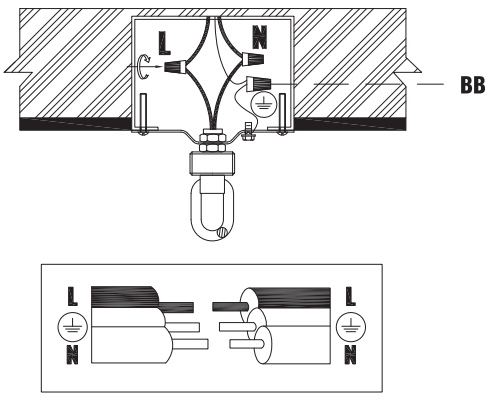

5.Fix the Canopy

Lock the Canopy (B) to the Mounting Bracket (AA) with the Loop Ring (DD).

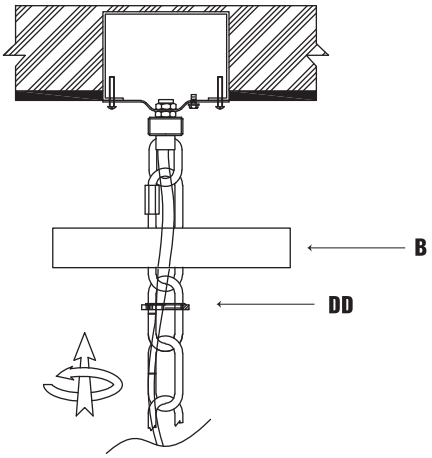

6.Install the Bulbs

E12 x 12, Max 40W each, LED recommended (not included).
Note:
To achieve dimming functionality, you need to use dimmable bulbs and a dimmer switch.

