
ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

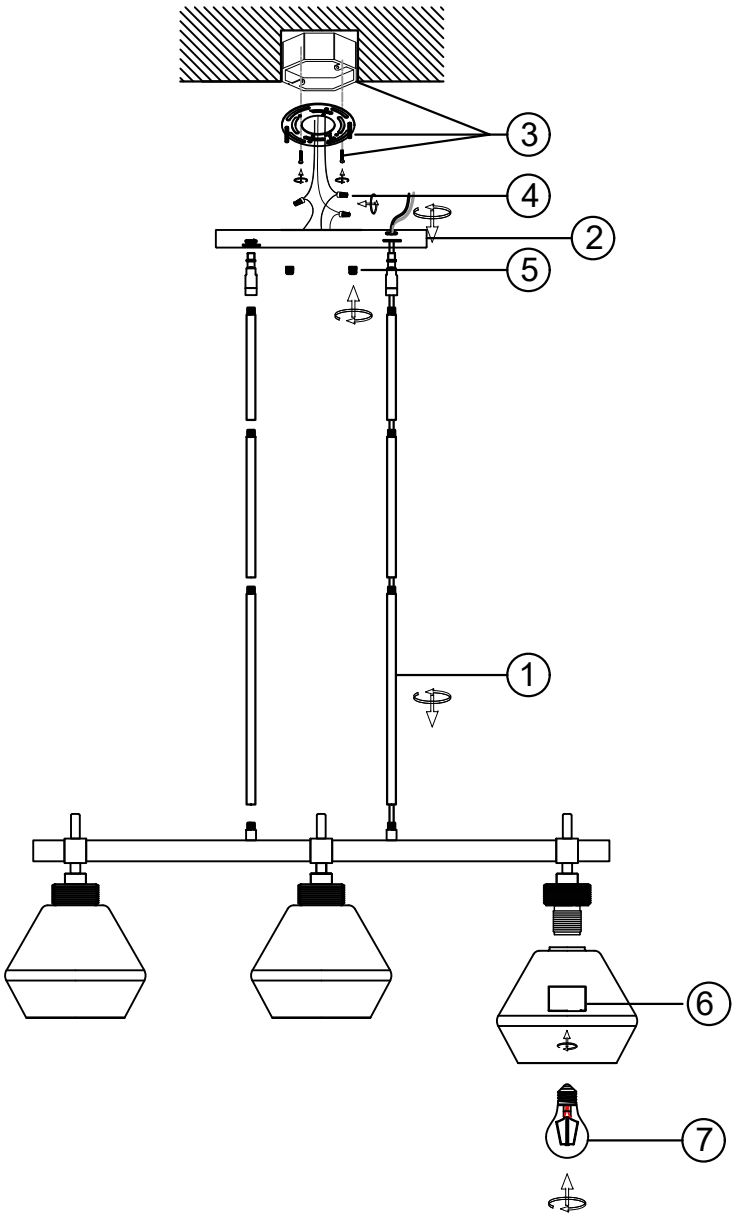

Before You Begin:

- Ensure power is turned off at the circuit breaker before installation.
- Read all instructions carefully.
- Installation should be performed by a qualified electrician if you are unfamiliar with wiring.

Step-by-Step Installation:

1.Connect the downrod to a desired length. Thread the main wires through the downrod and the swivel joint, then securely fasten the assembly to the fixture body.
2.Feed the wires through the ceiling canopy. Attach the canopy to the swivel joint, and secure it using the provided washer and hex nut.
3.Secure the mounting bracket to the junction box using the provided screws.
4.Wiring Connections
·Use wire connectors to connect the black (hot) wire to the black wire, the white (neutral) wire to the white wire, and the ground wire to the grounding terminal.
·Ensure no exposed conductors remain outside wire connectors or outside the junction box.
5.Secure the canopy to the mounting bracket using the provided finial nuts.
6.Secure the glass shade to the fixture using the retaining ring.
7.Install the bulb into the socket (bulb not included).
8.Restore power and test the fixture for proper operation.
Installation complete.

Safety Instructions:

To avoid fire, shock, and serious personal injury, follow all instructions carefully.
1. Do not install or use the light fixture if any part is missing or damaged.
2. To avoid possible electrical shock, be sure electricity is turned off at the main fuse or circuit breaker box before wiring.
3. Make certain no bare wires are exposed outside the wire connectors.
4. All wiring must conform to national and local electrical codes.
5. Follow the recommended instructions for the proper method of wiring your new light fixture. If you feel you do not have enough electrical wiring knowledge or experience, have your light fixture installed by a licensed electrician. Any electrical work not described in this manual should be performed by a licensed electrician.