




Product Installation Instructions

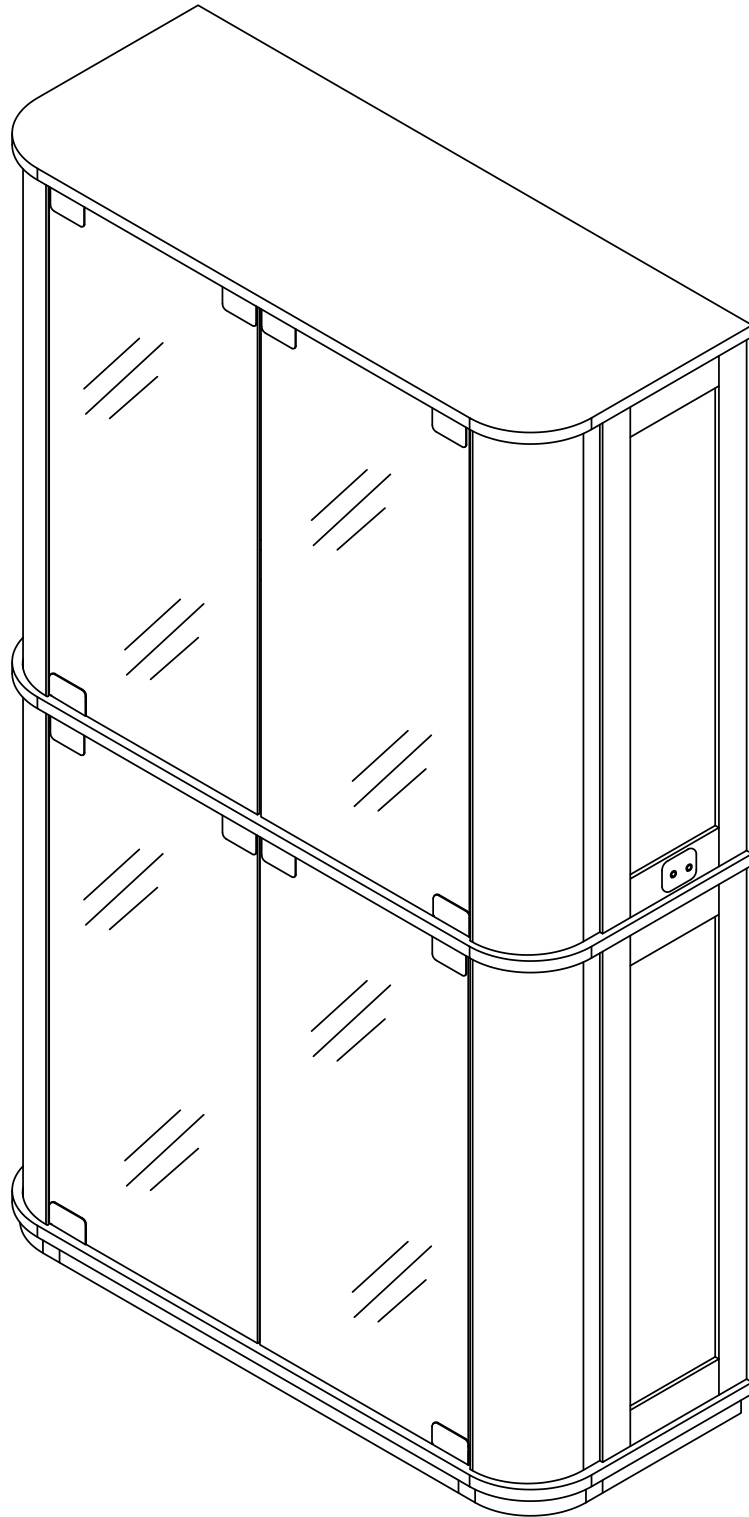




Ax1




Bx1




Cx2

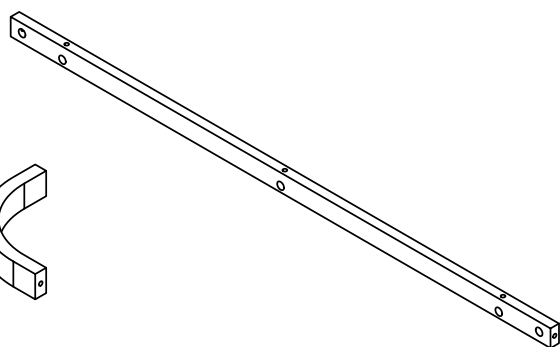


Dx1

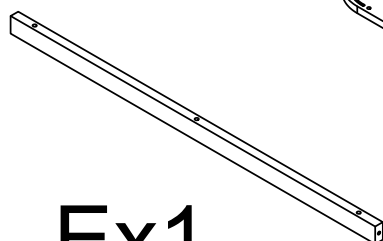


Ex1

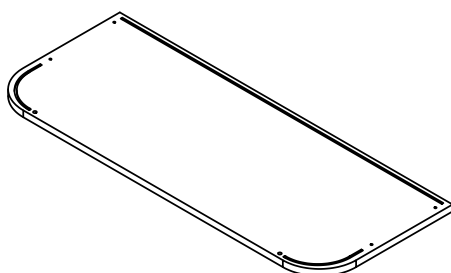


Fx1




Gx3

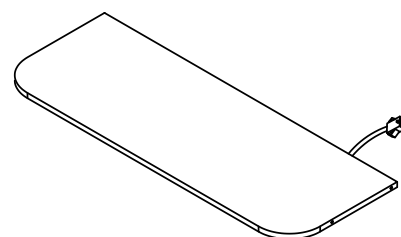

Hx2




Ix2




Jx2




Kx4

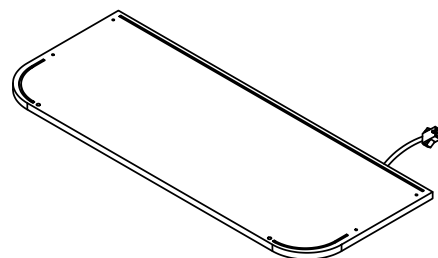


Lx1

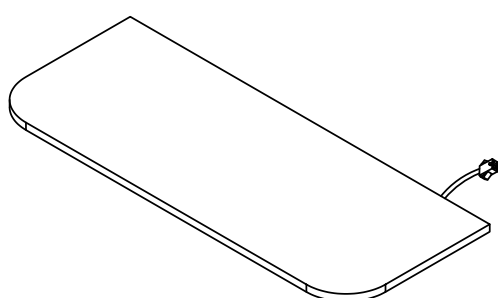


Mx1













Nx4

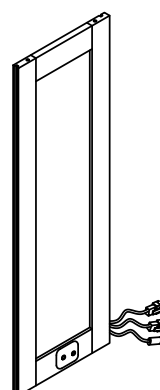


Ox1



1


①		Two in one screw (6x28mm)			40pcs +4pcs	
②		Two in one nut (10x12mm)			40pcs +4pcs	
③		Non-slip pads (50x10x2mm)			10pcs +2pcs	
④		Rebound device & Screw (3x16mm)			8pcs +2pcs	
		Iron sheet			4pcs	
		Hinge			8pcs	4pcs 4pcs
⑤		Double end connecting line			2pcs	
⑥		Wire clamp			3pcs +2pcs	
⑦		Fixing clip & screw (3x16mm)			24pcs +2pcs	
⑧		Foot nail			6pcs +2pcs	
⑨	Anti Fall Hardware	 x2	 x2	 x2	 x2	 x4
		AC/DC Adapter (12V=3.0A)			1pcs	
Double-head screwdriver, use as required  1pcs 						
						2

Product structure decomposition

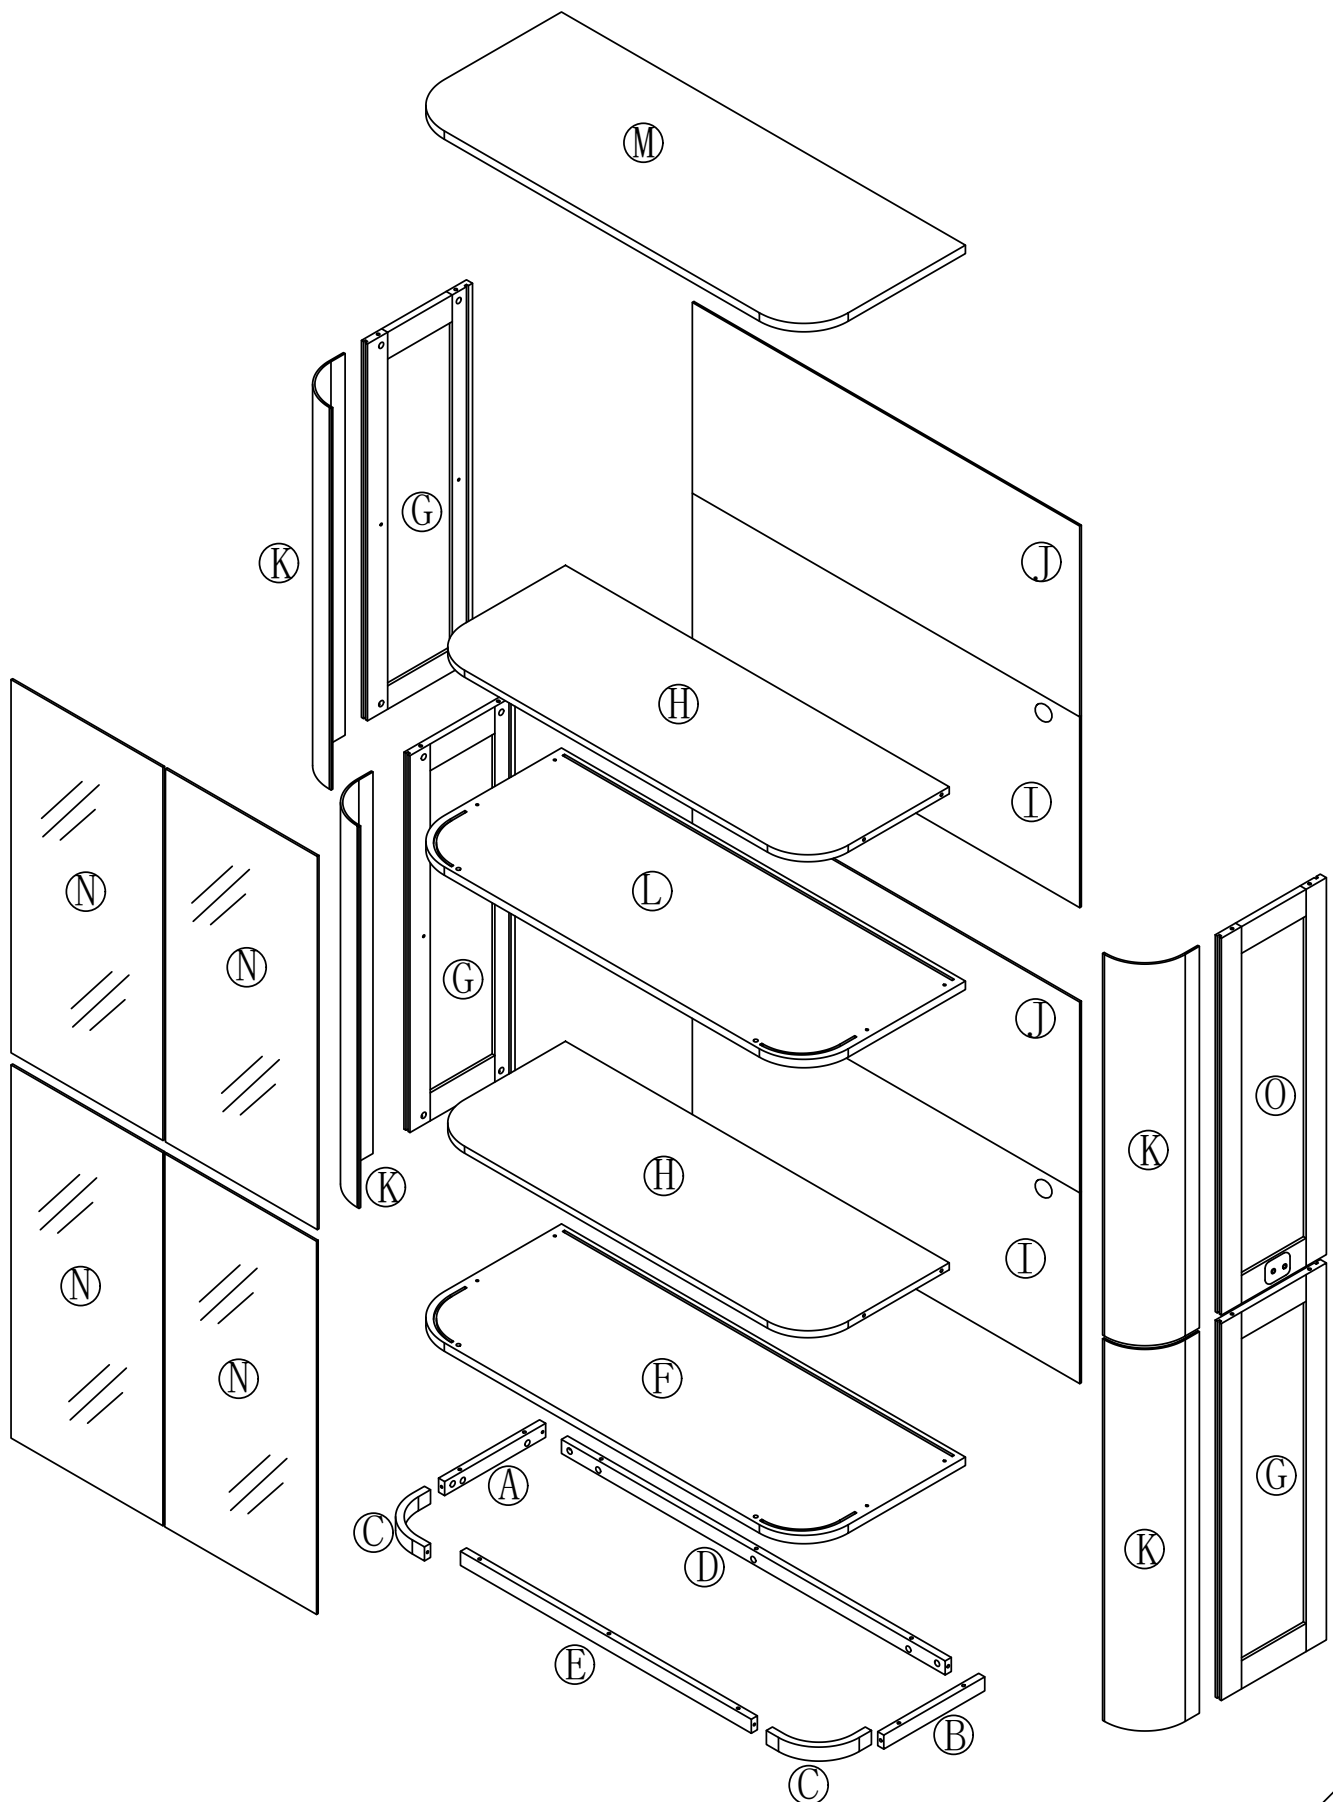


Use parts ① and ②



Step1

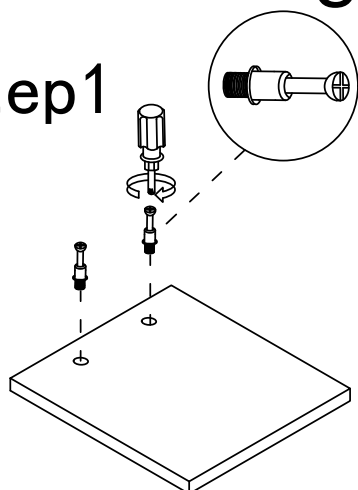


Step2

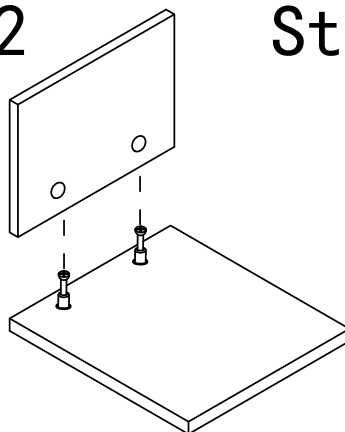

Step3


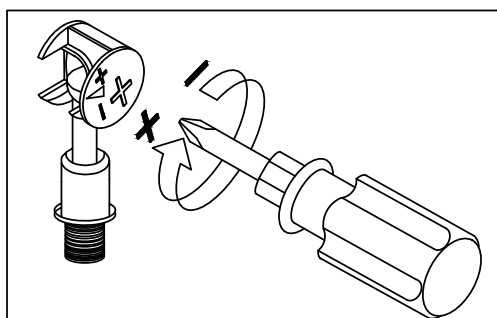
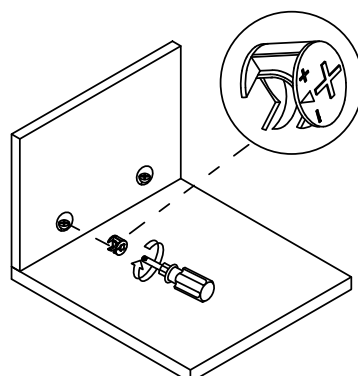


Use a screwdriver to lock in the direction of the "+" sign


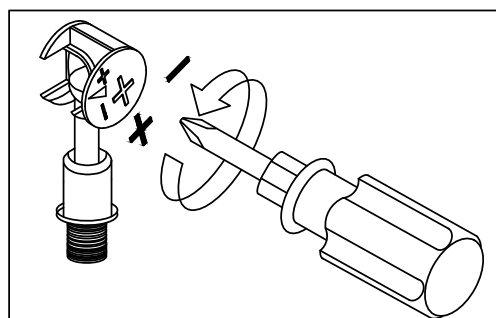


Disassemble along the direction of "-" sign



Step 1

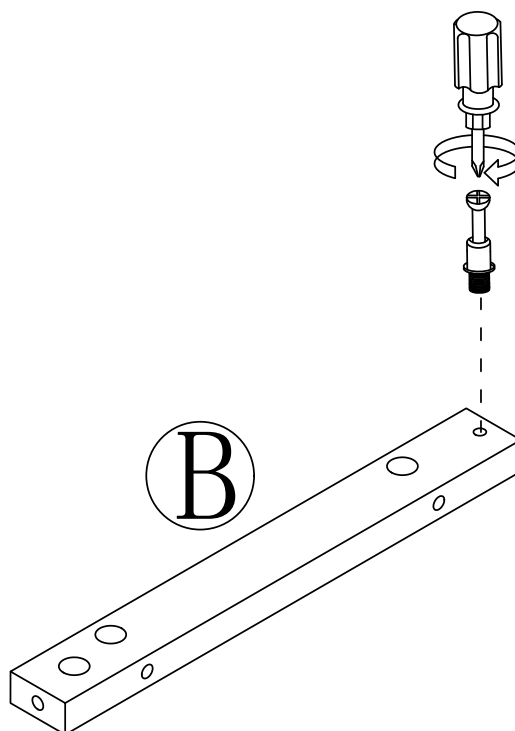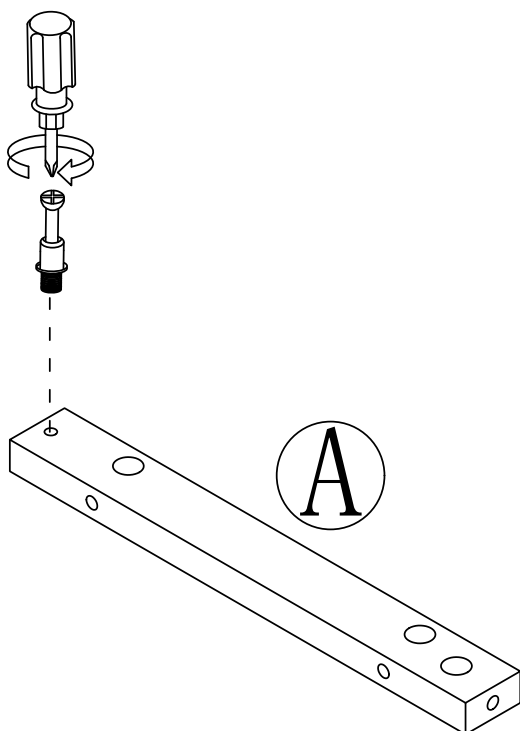

Step 2

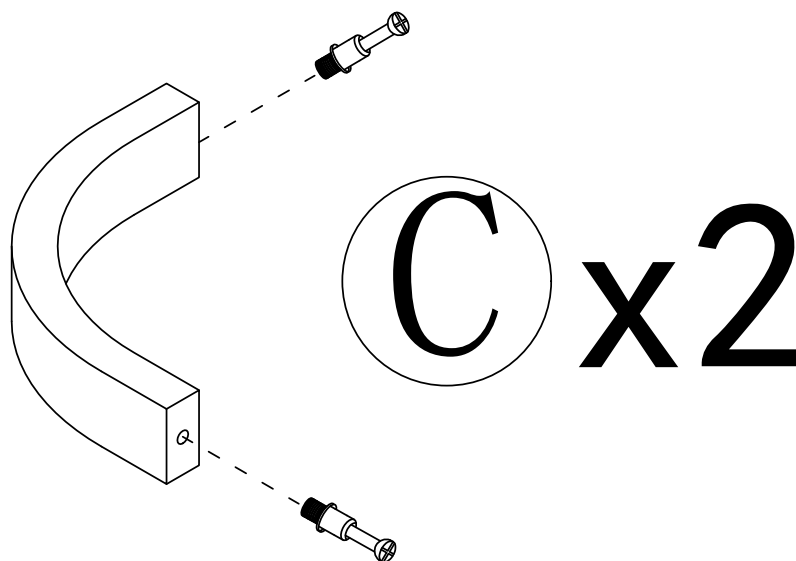

Step 3

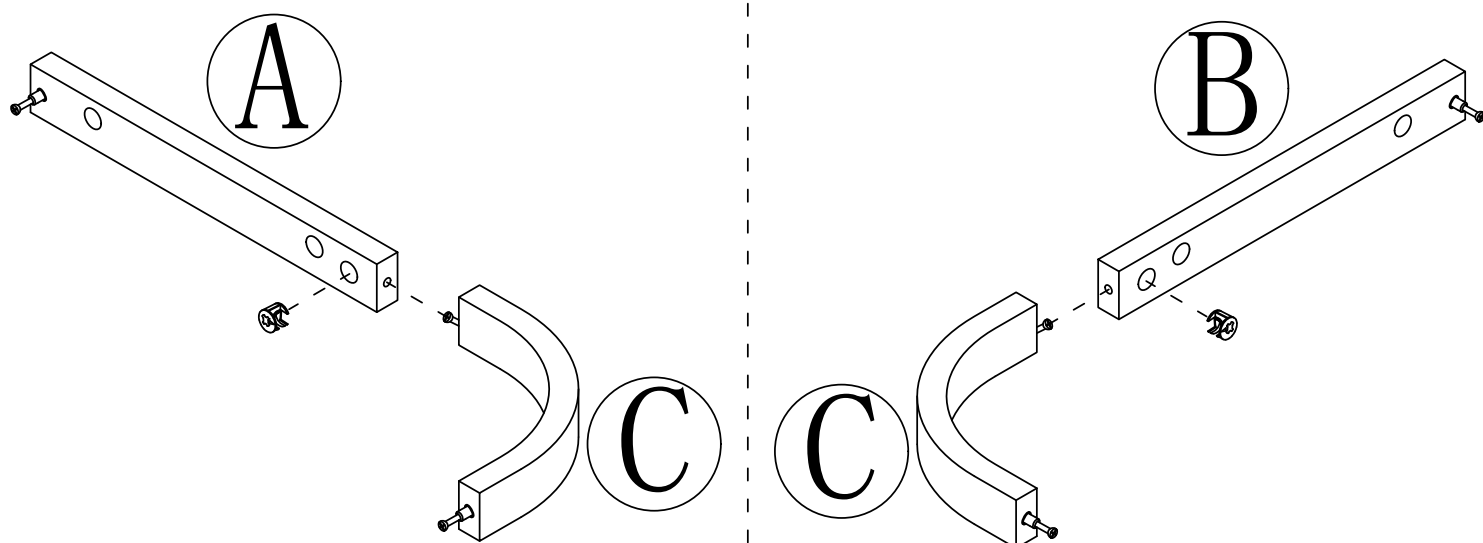


Step 4

②



x2

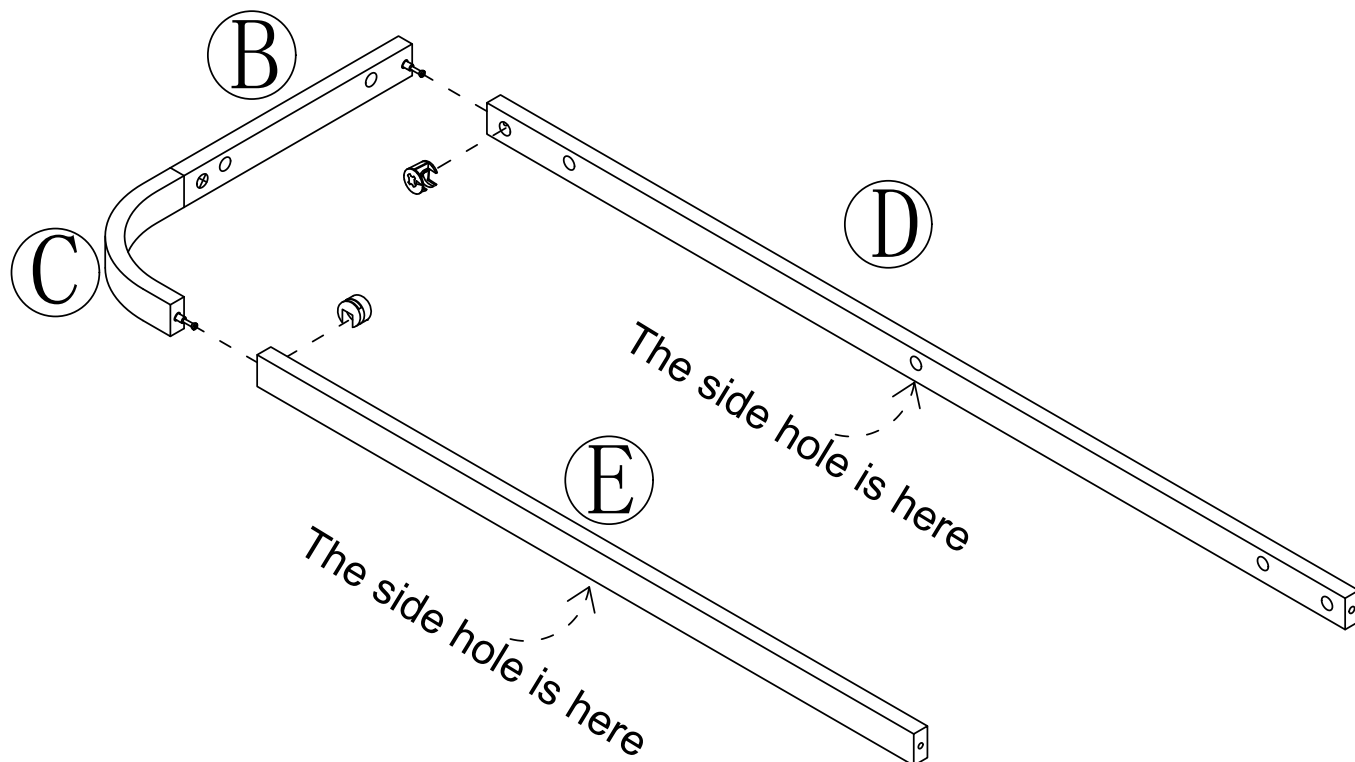


Step 5



②




x2

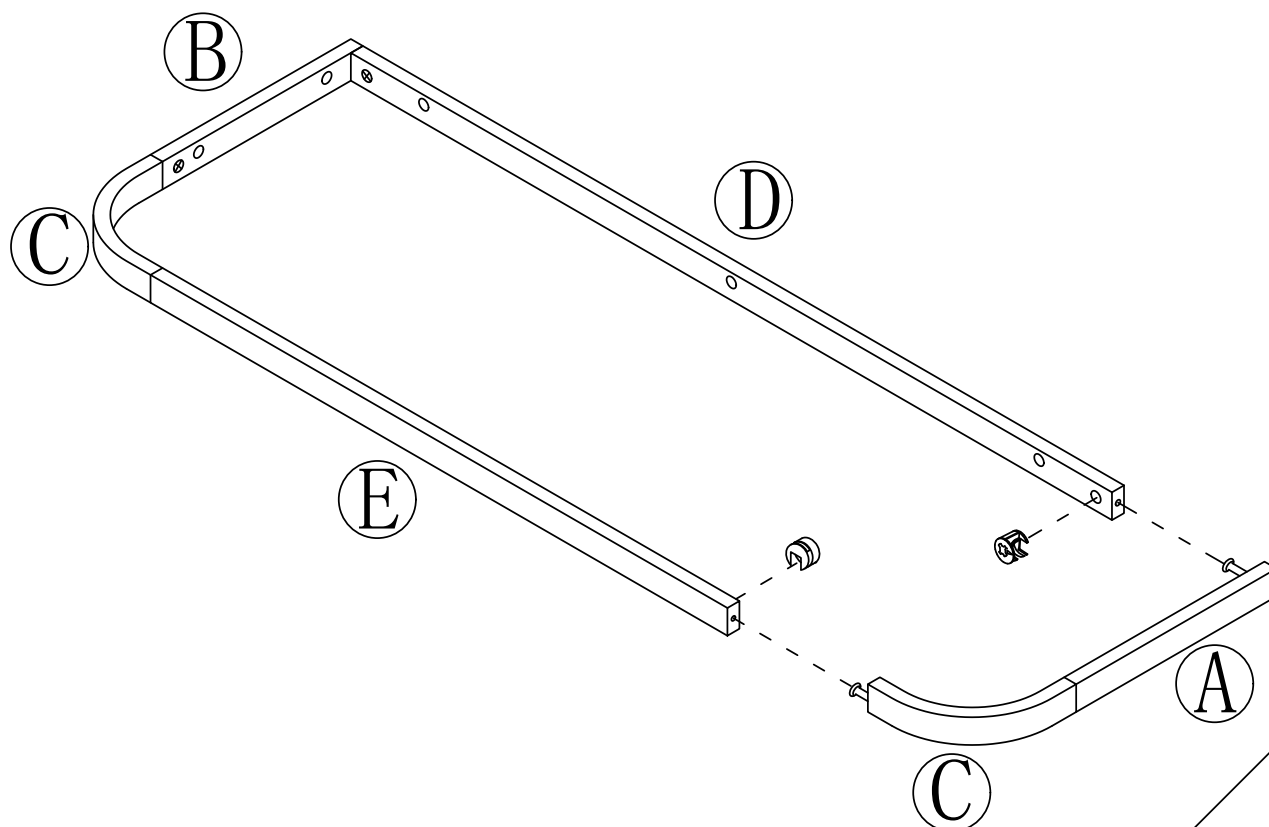

Step 6

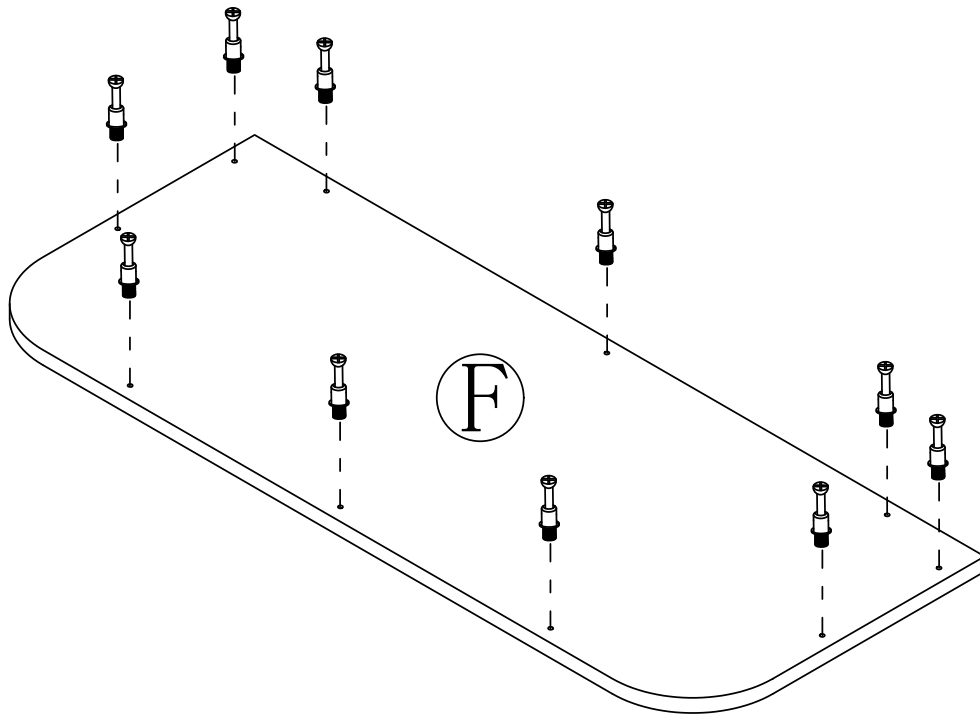


Step 7

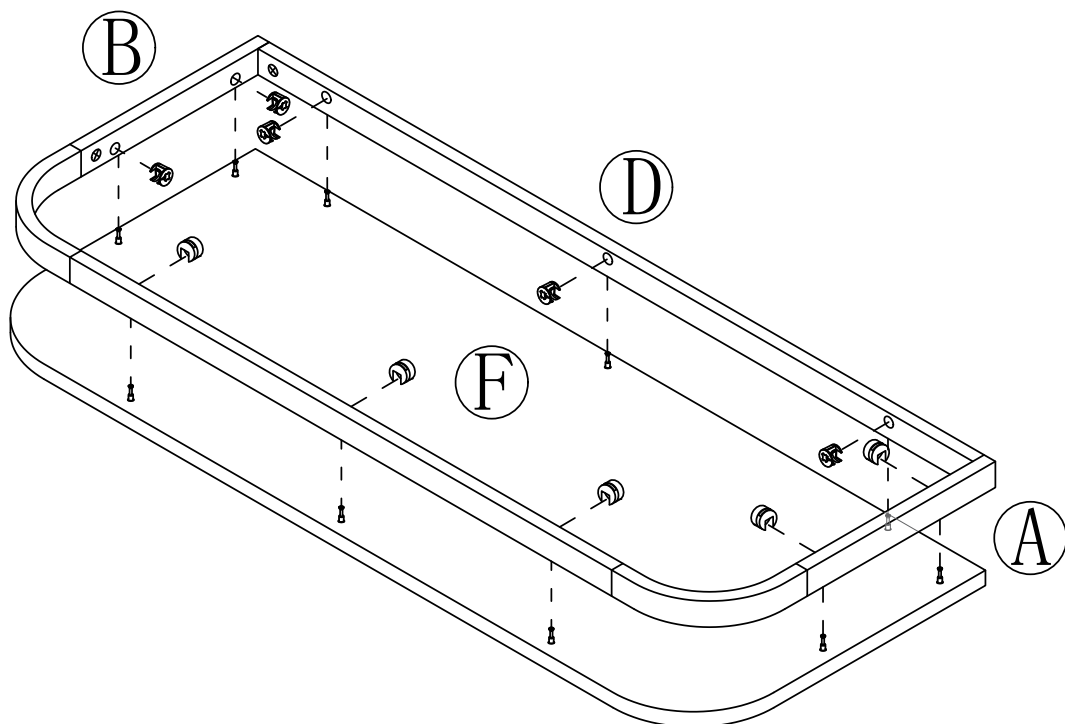


Step 8

3





Tear off release paper and stick the black foot pad on the board


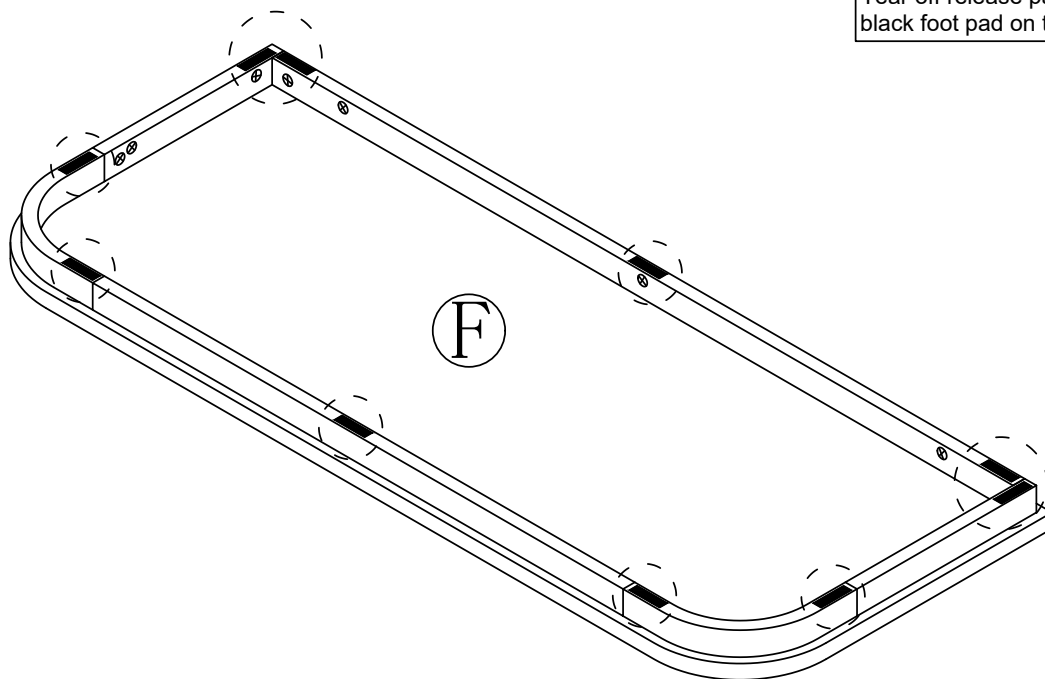


Step 9

1

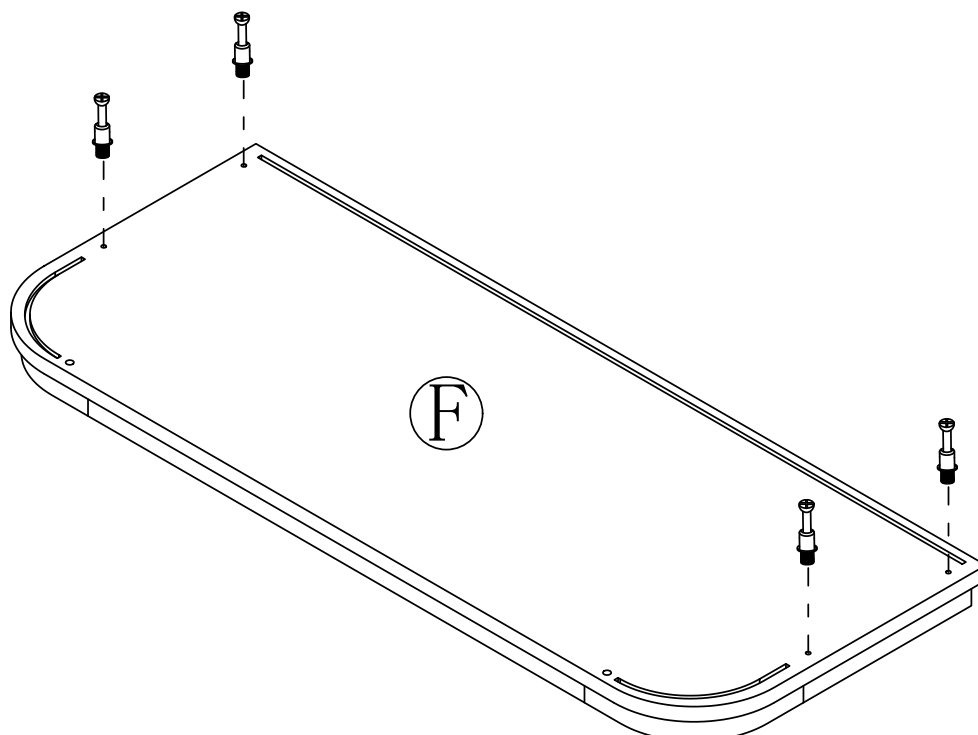



Step 10

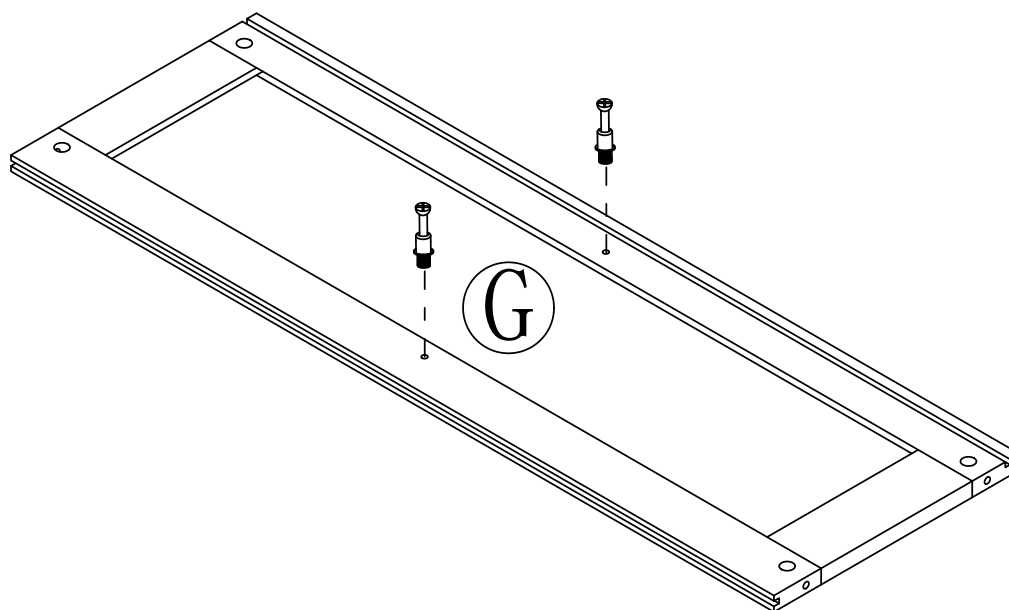

x3

Step 11

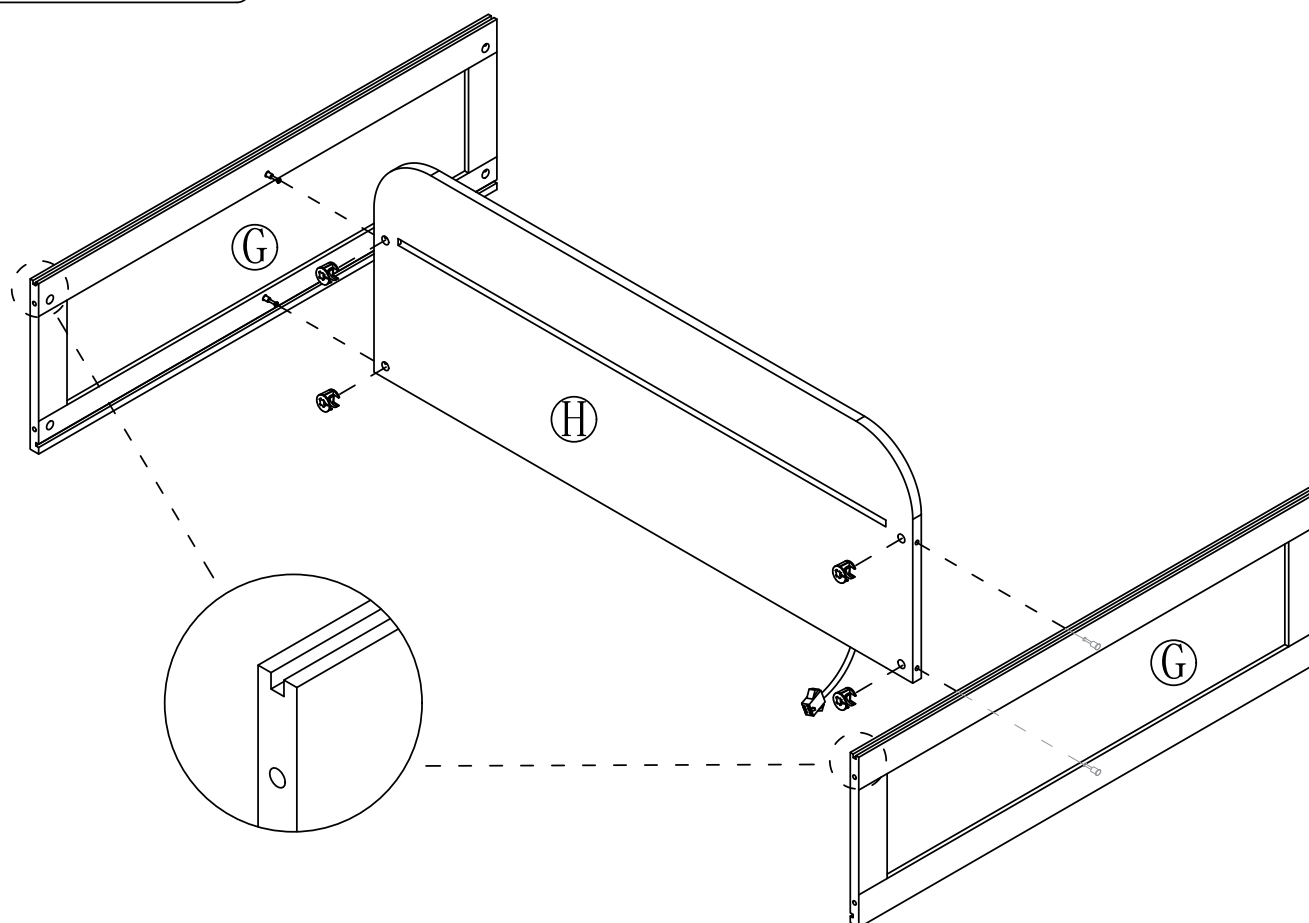


Step 12


2




x4

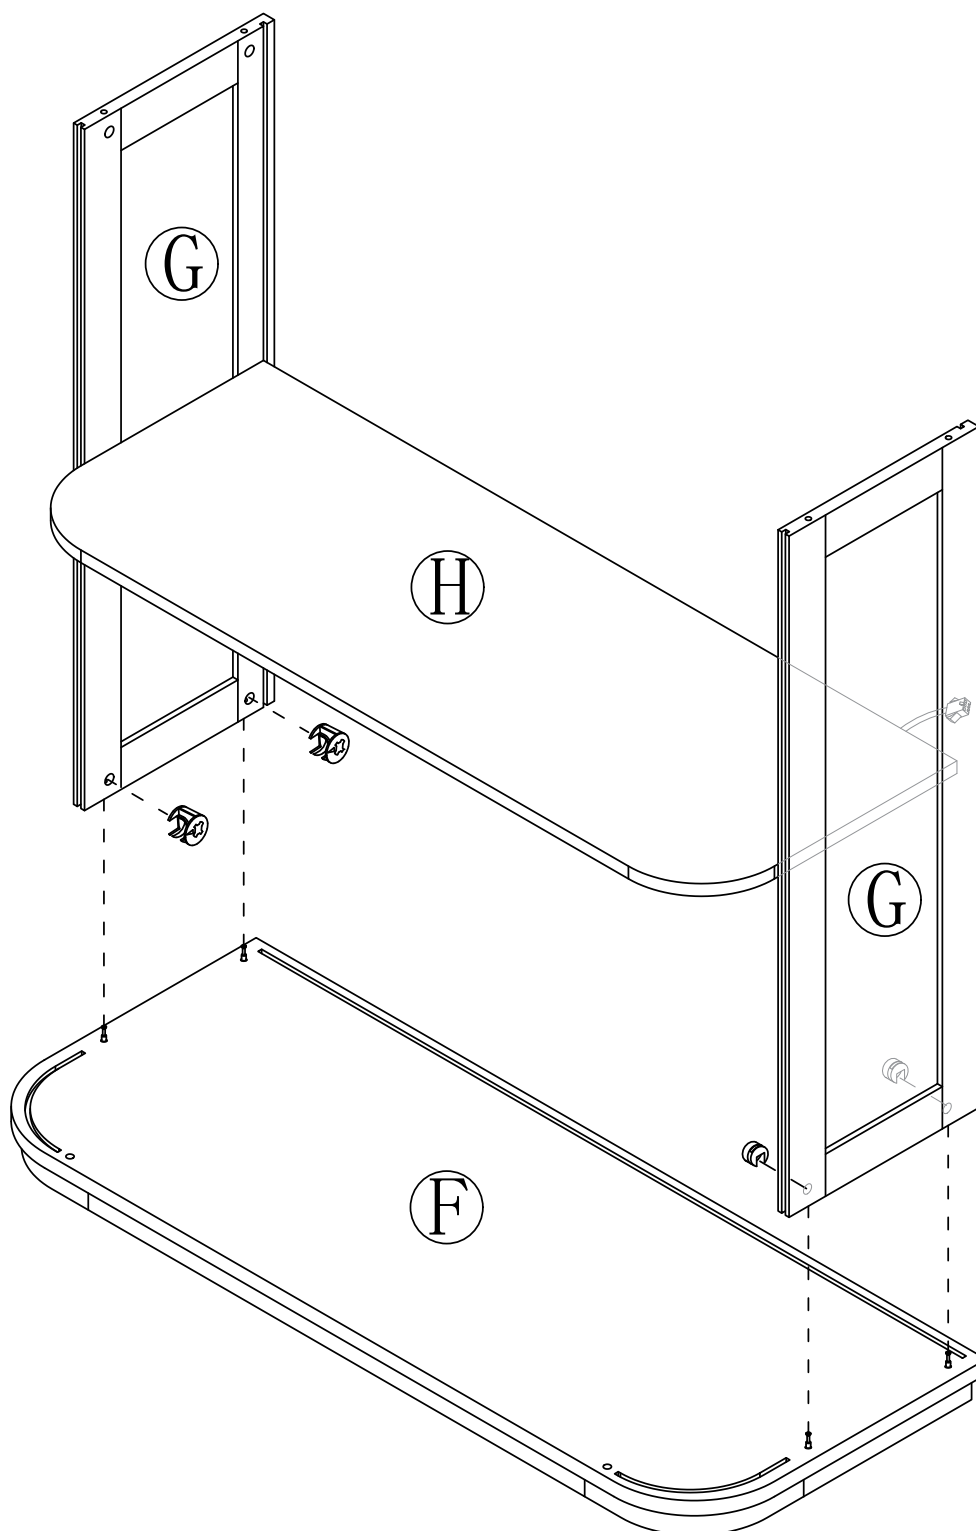



Step 13

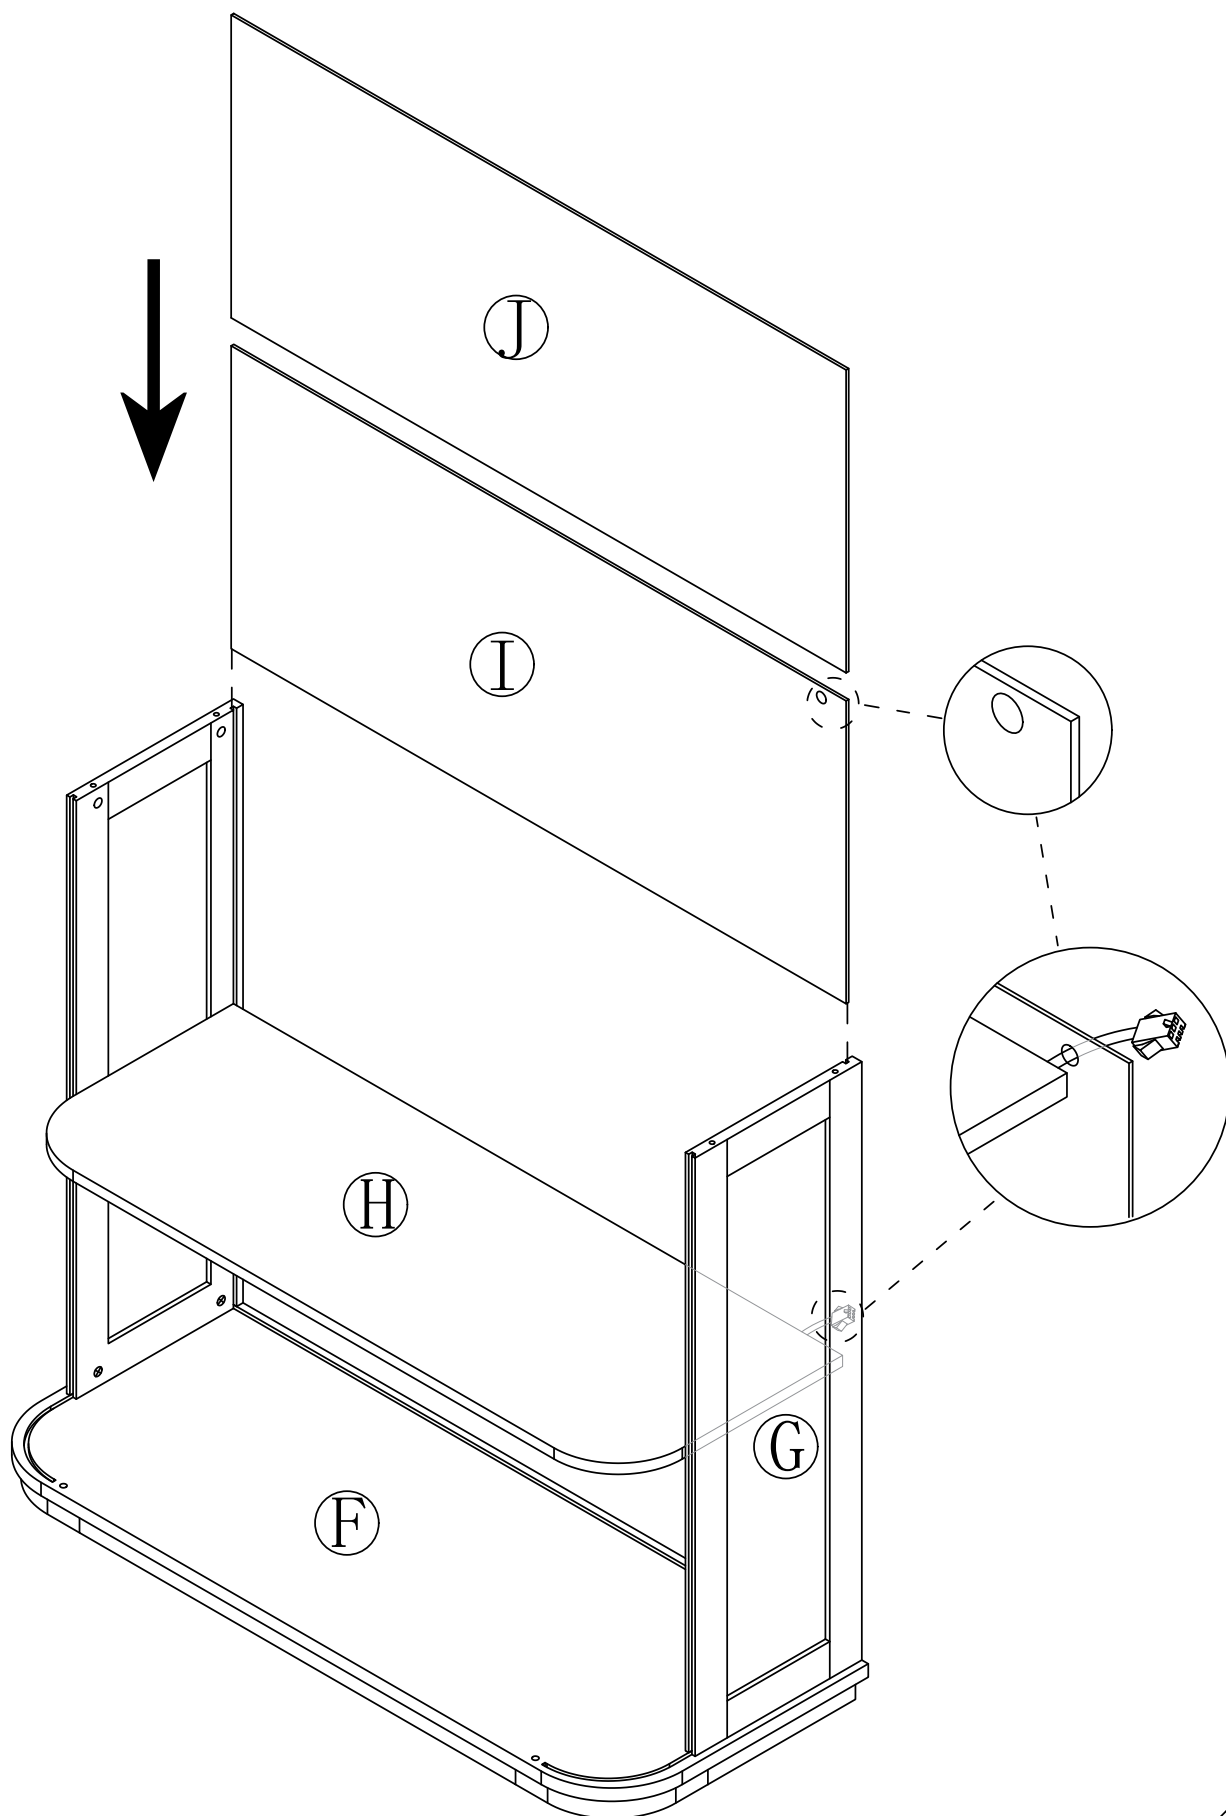



Step 14

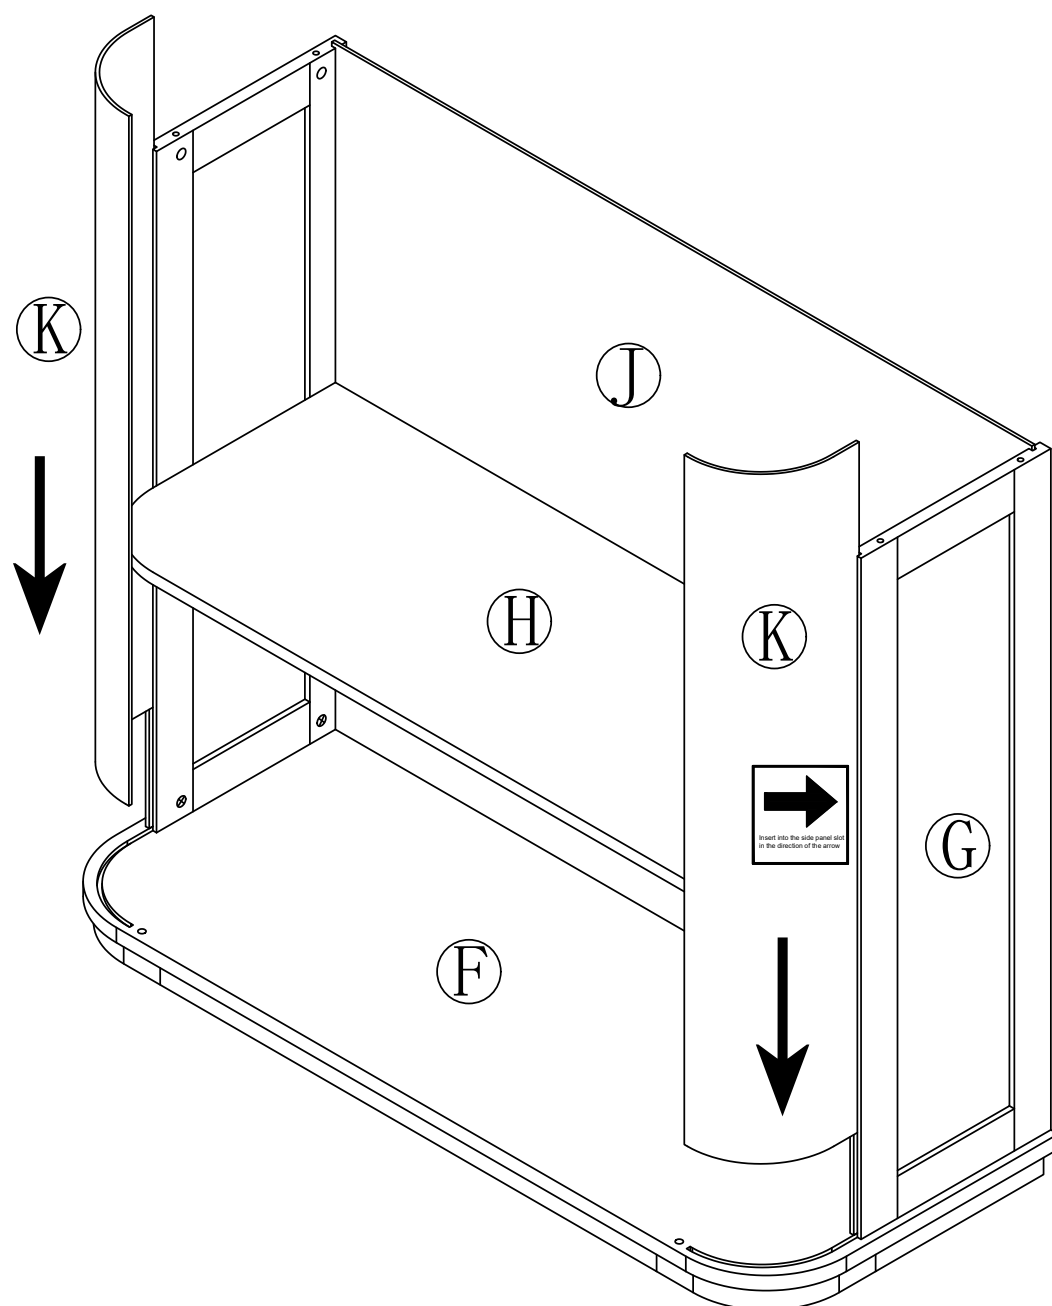

Step 15

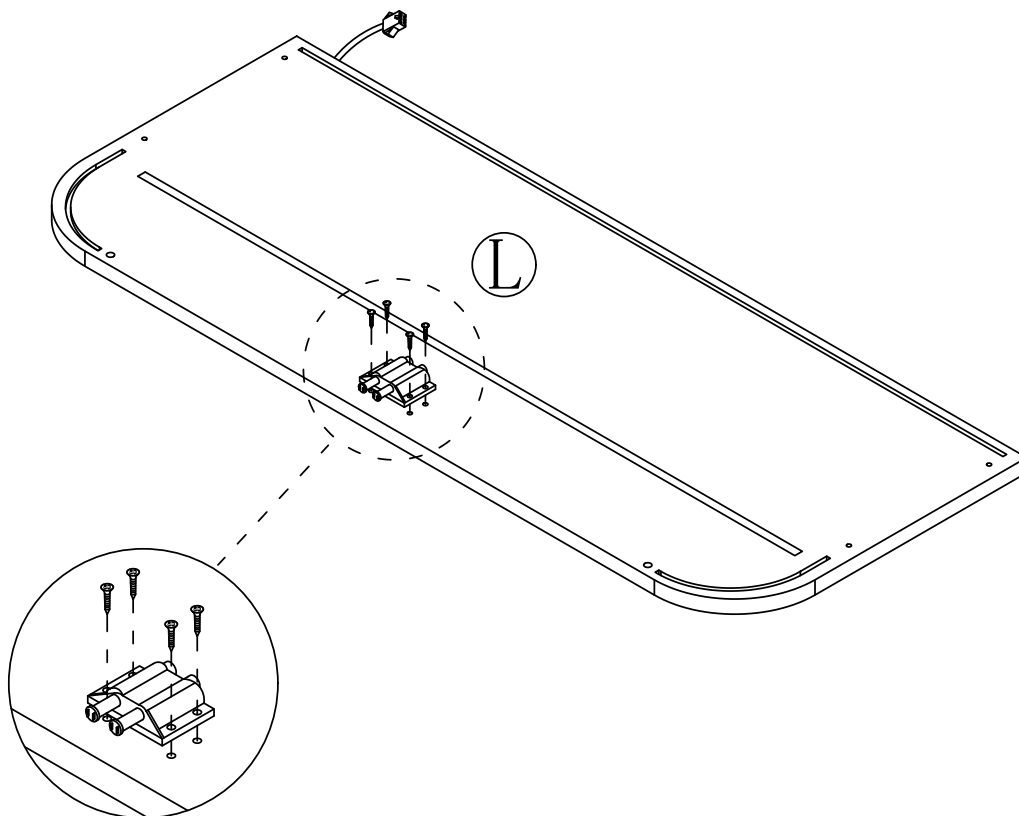

Step 16

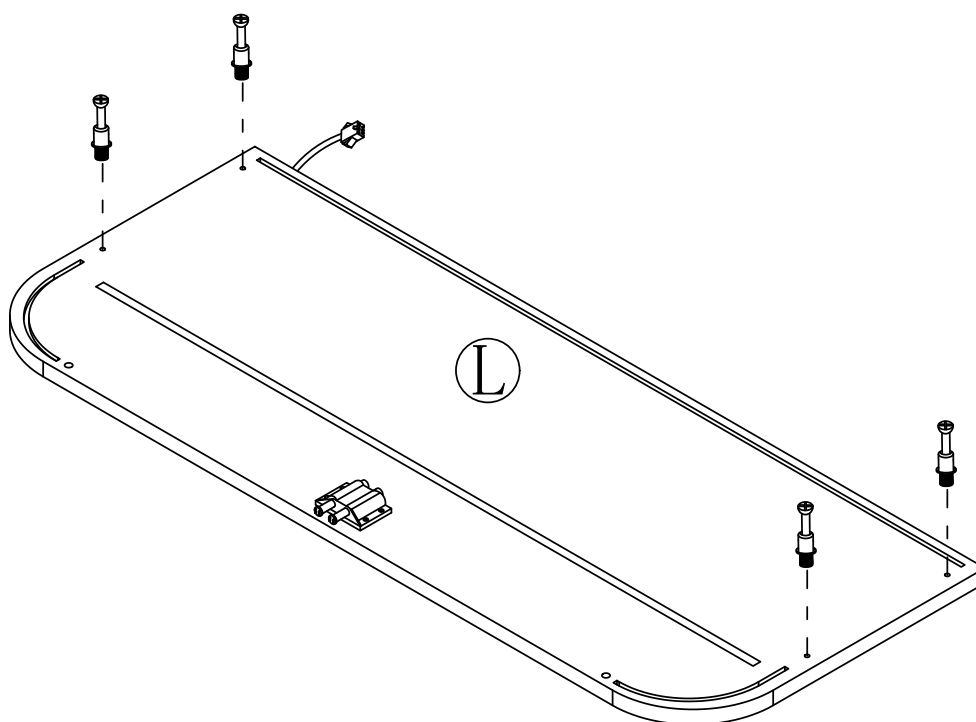


Step 17



②





x4

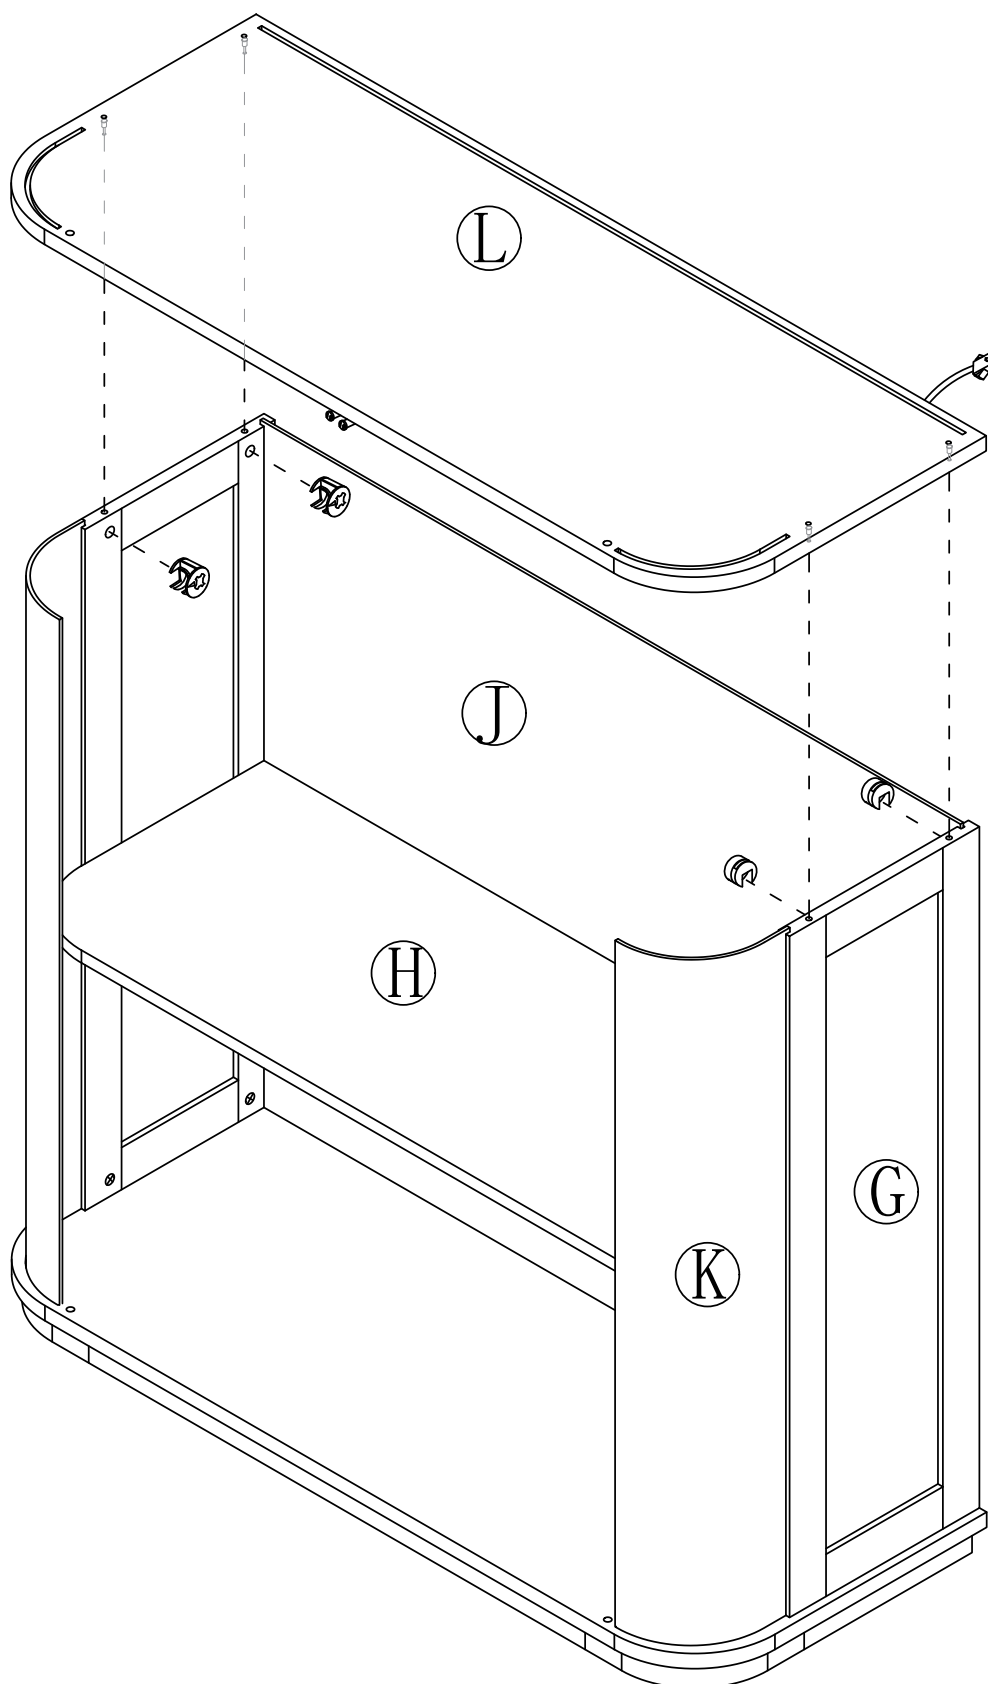



Step 18

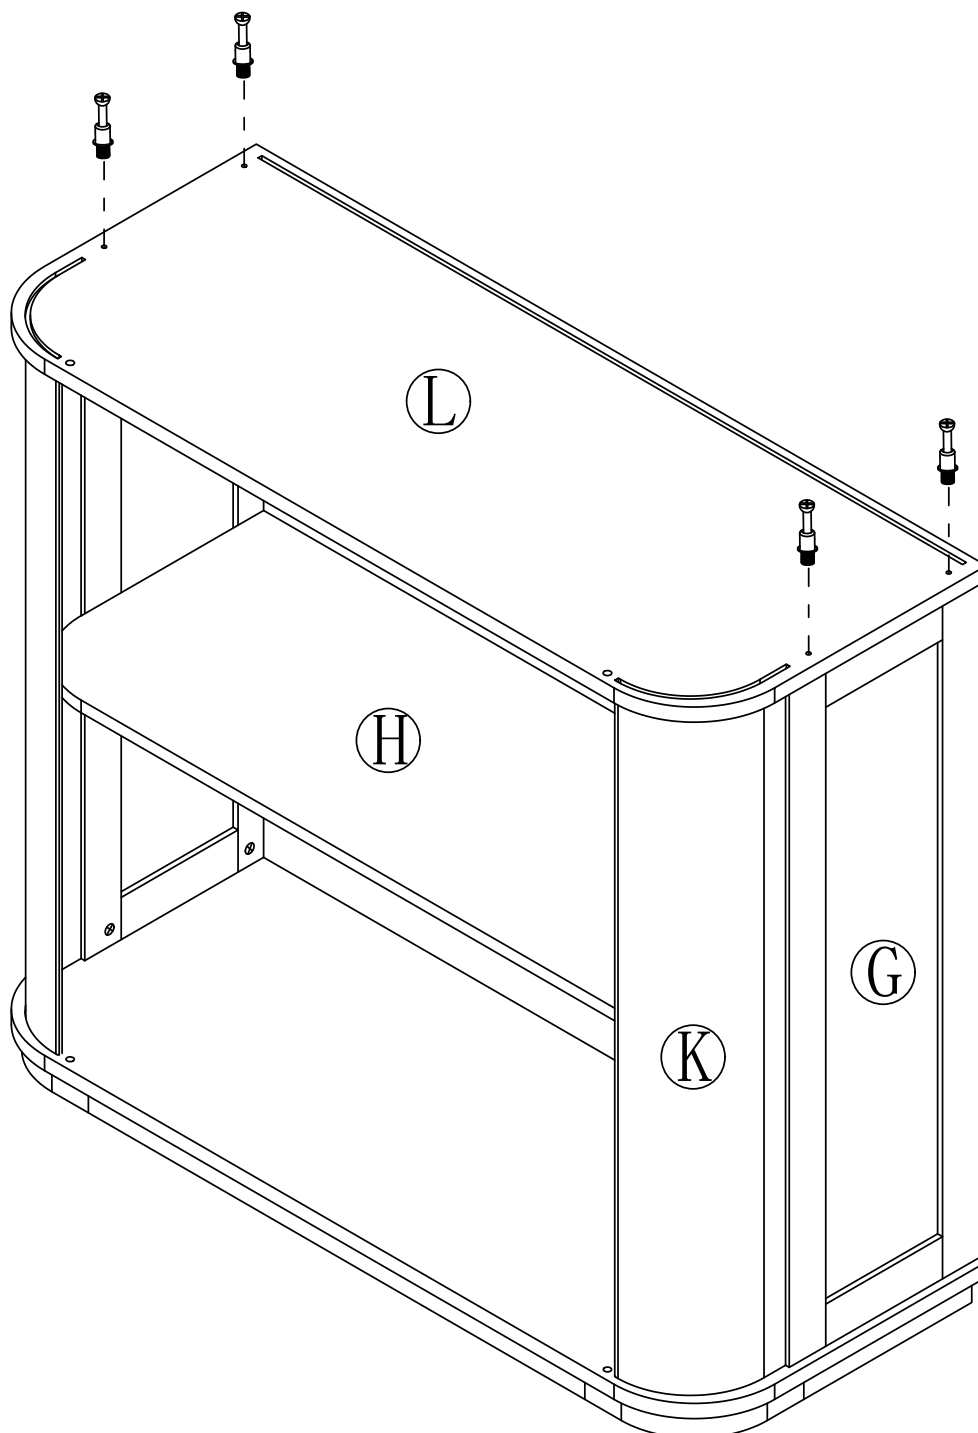

Step 19

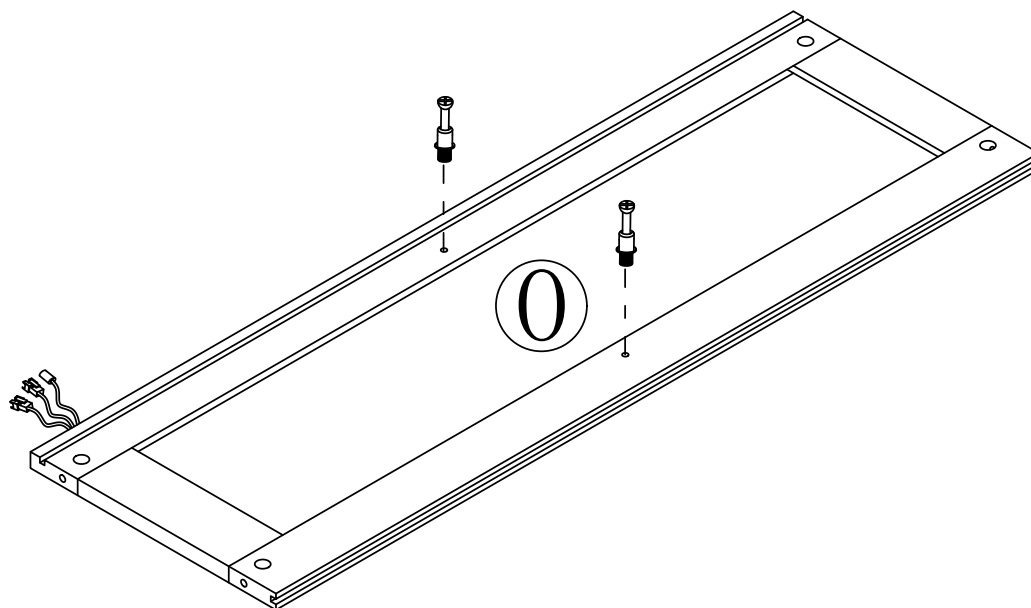

Step 20

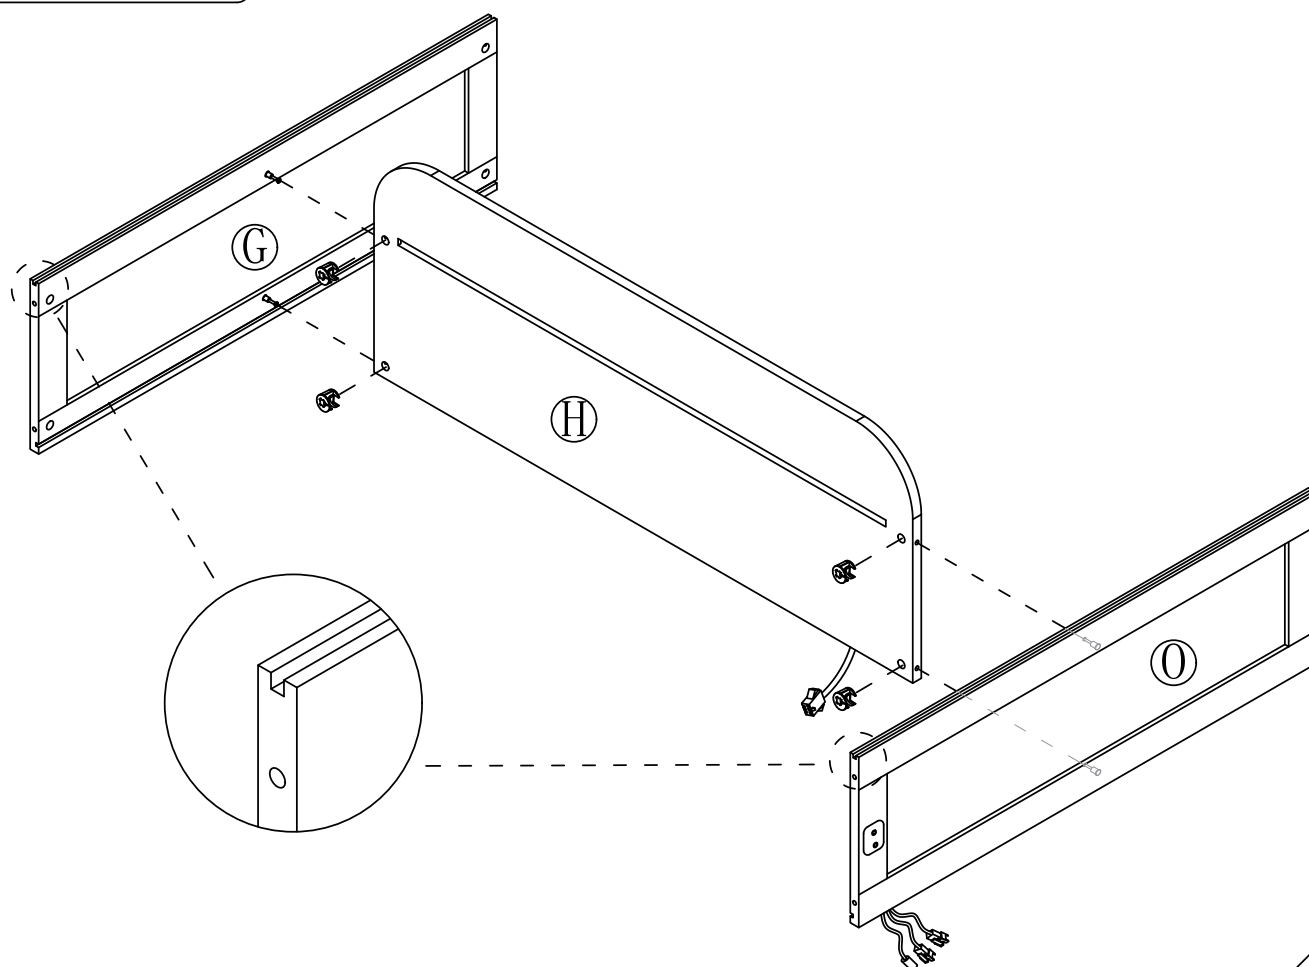


Step 21


②




x4

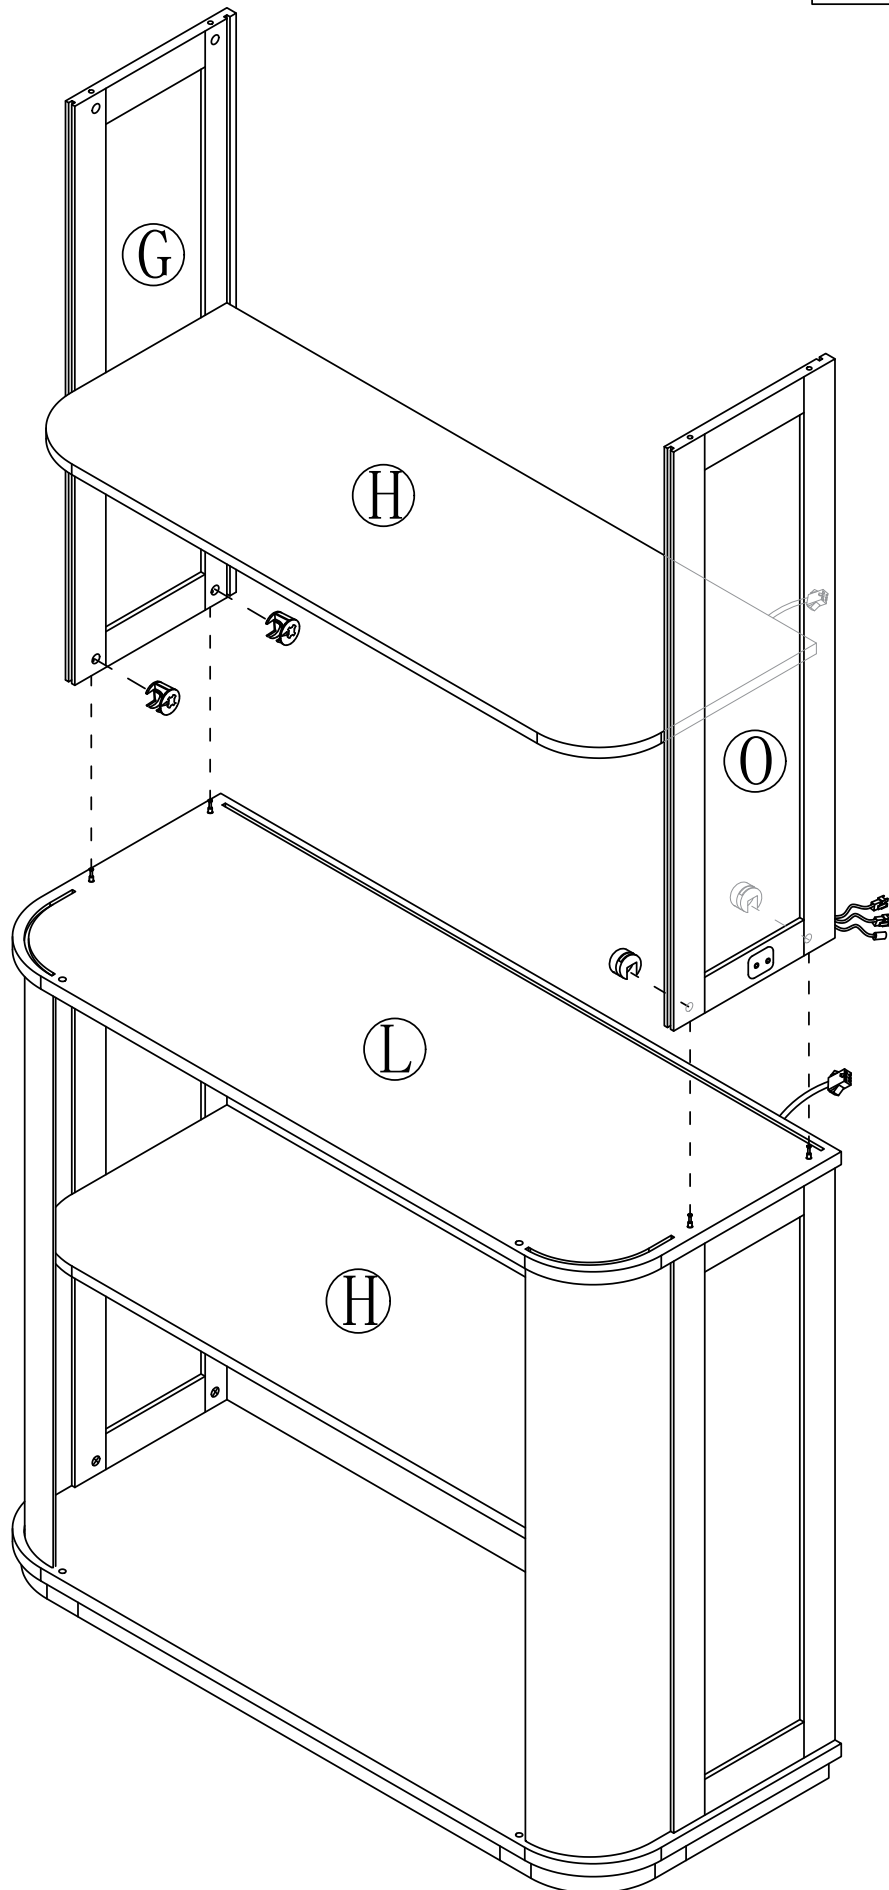



Step 22

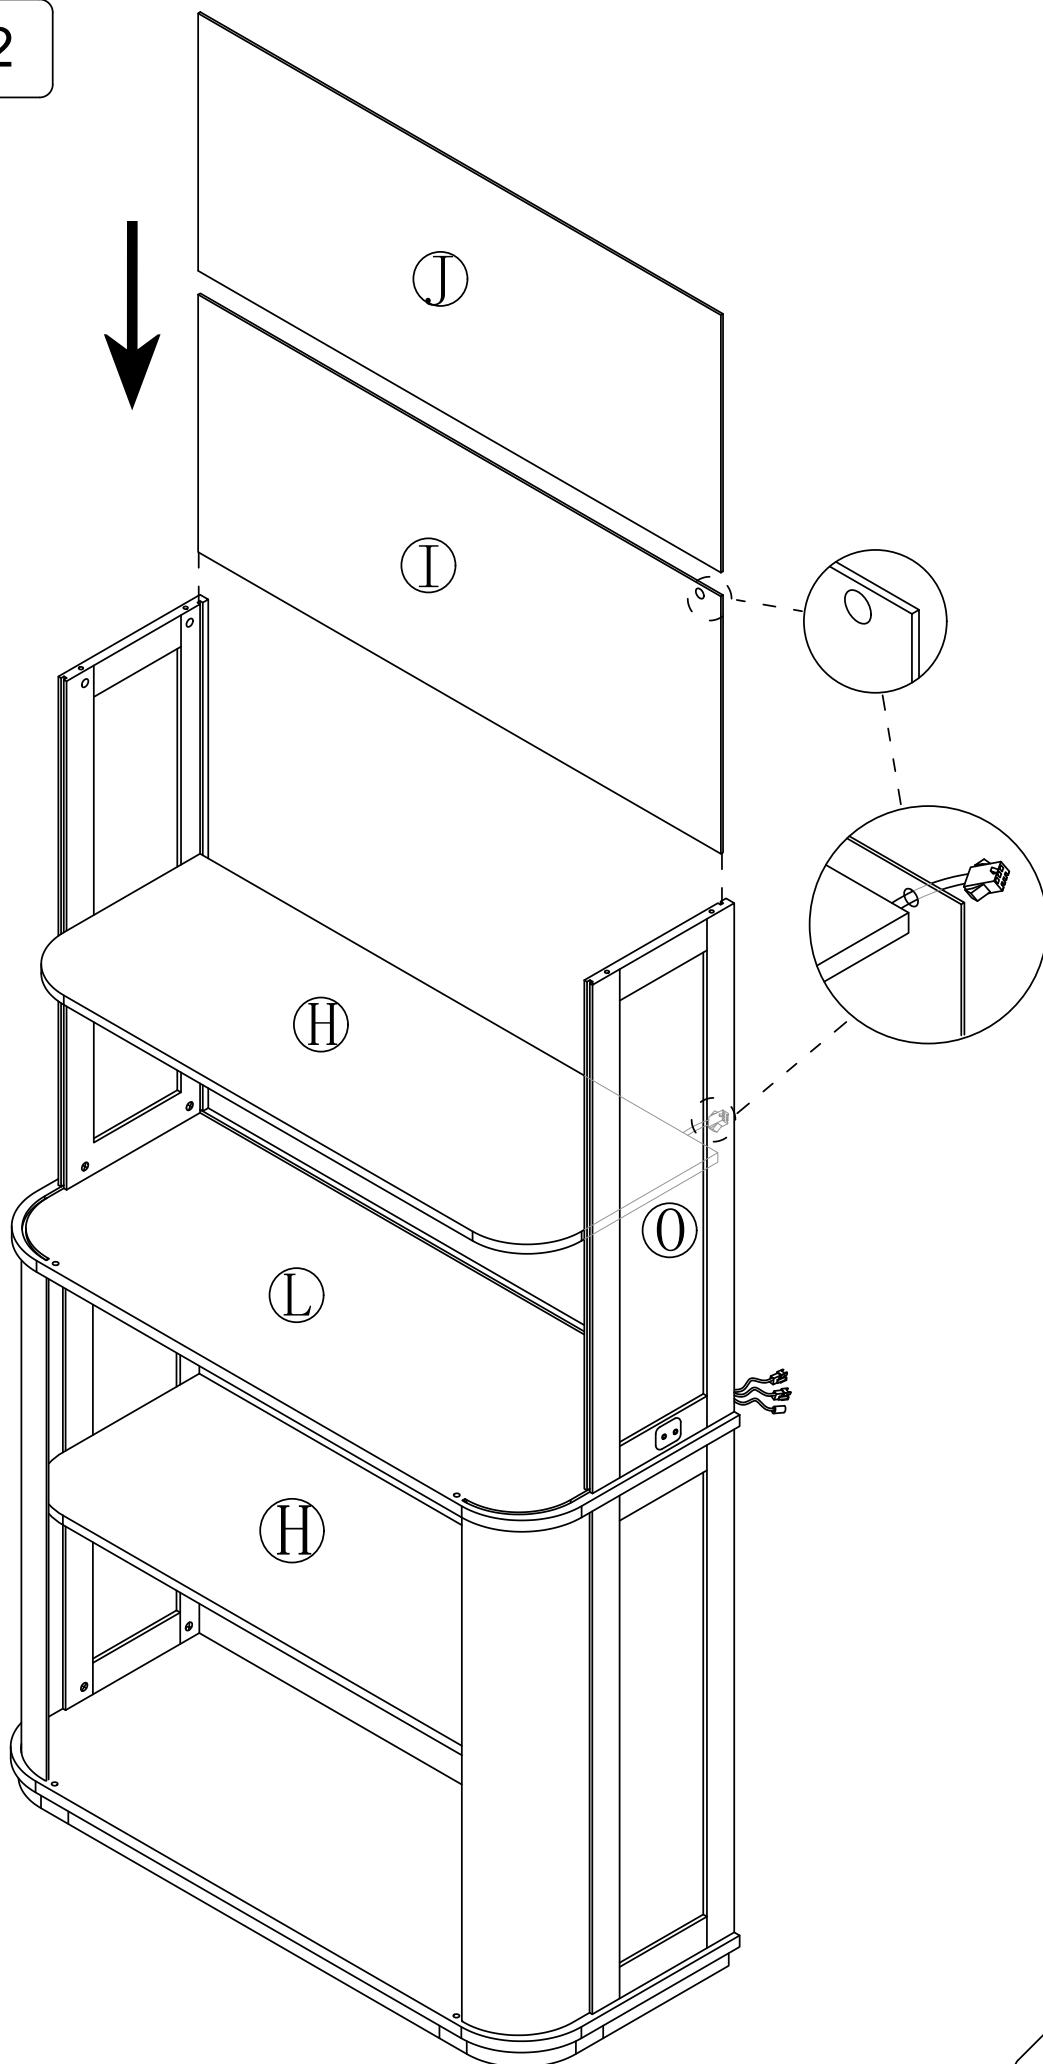



Step 23

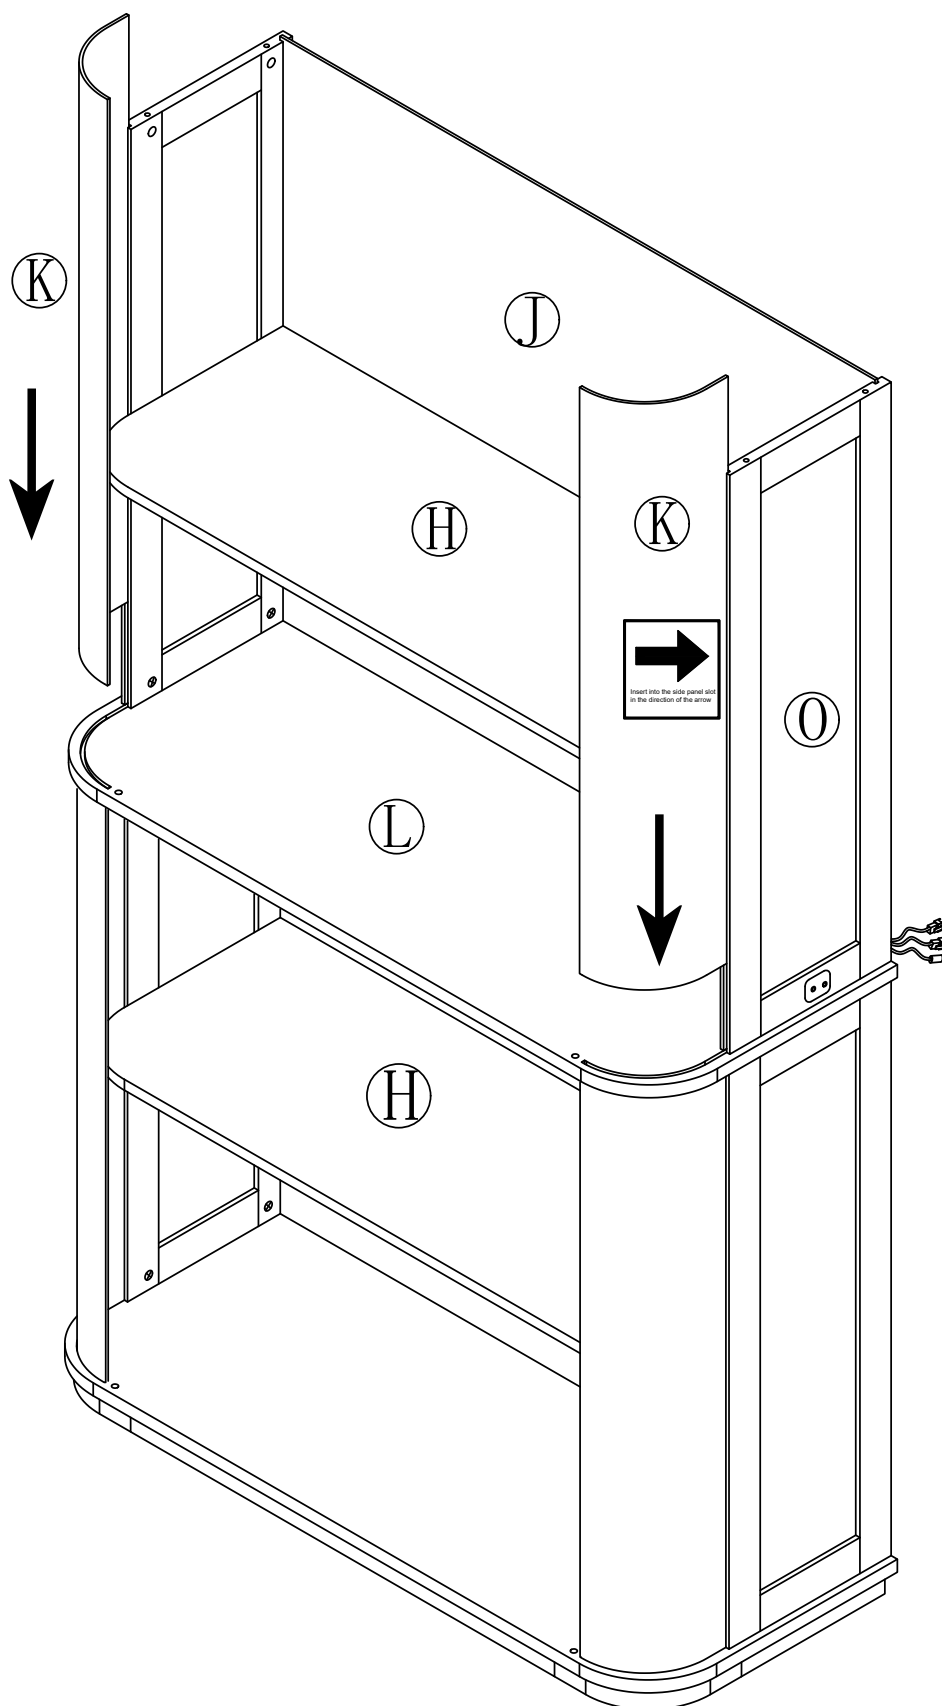

Step 24

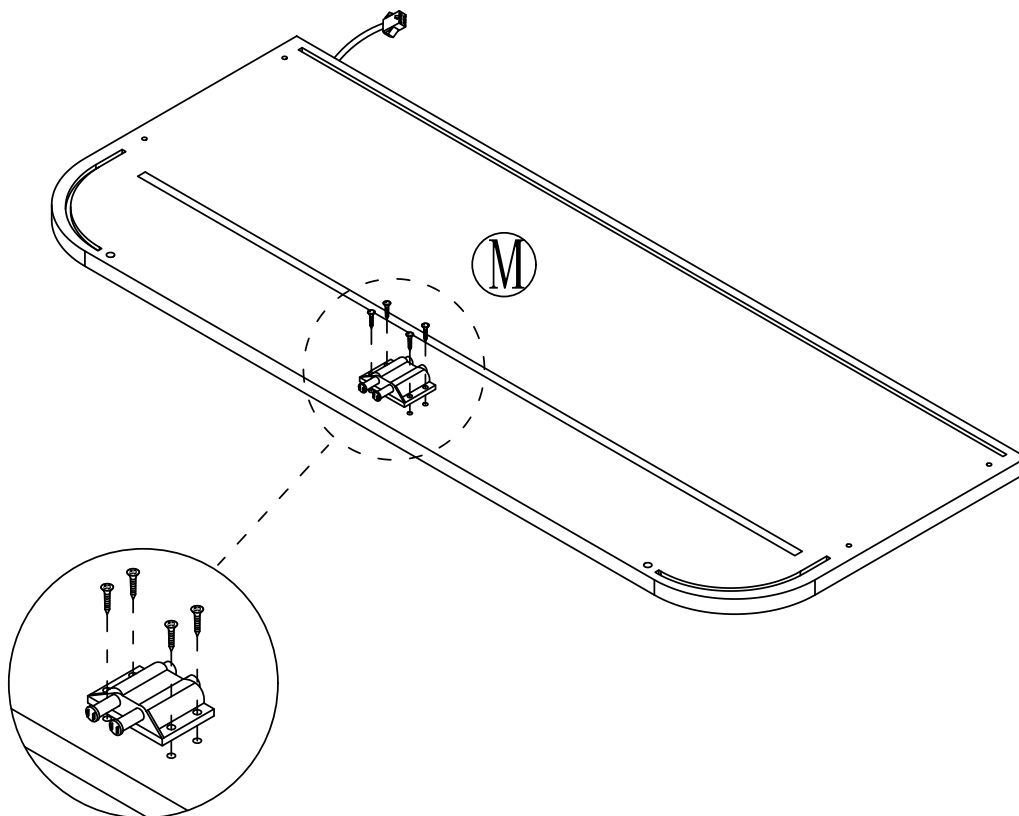

Step 25

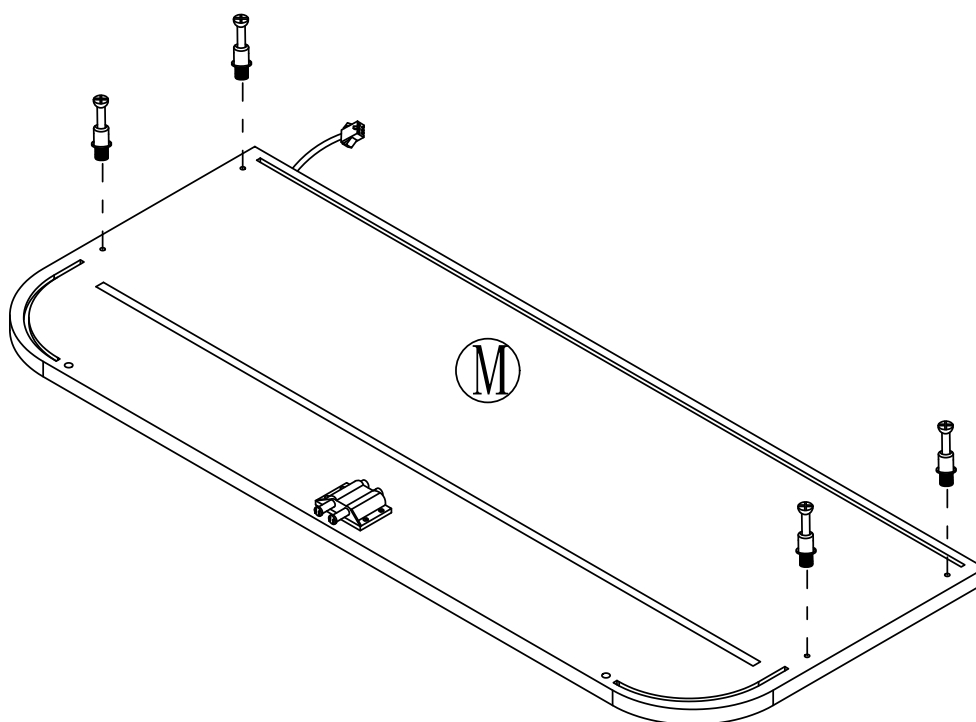


Step 26

②







x4

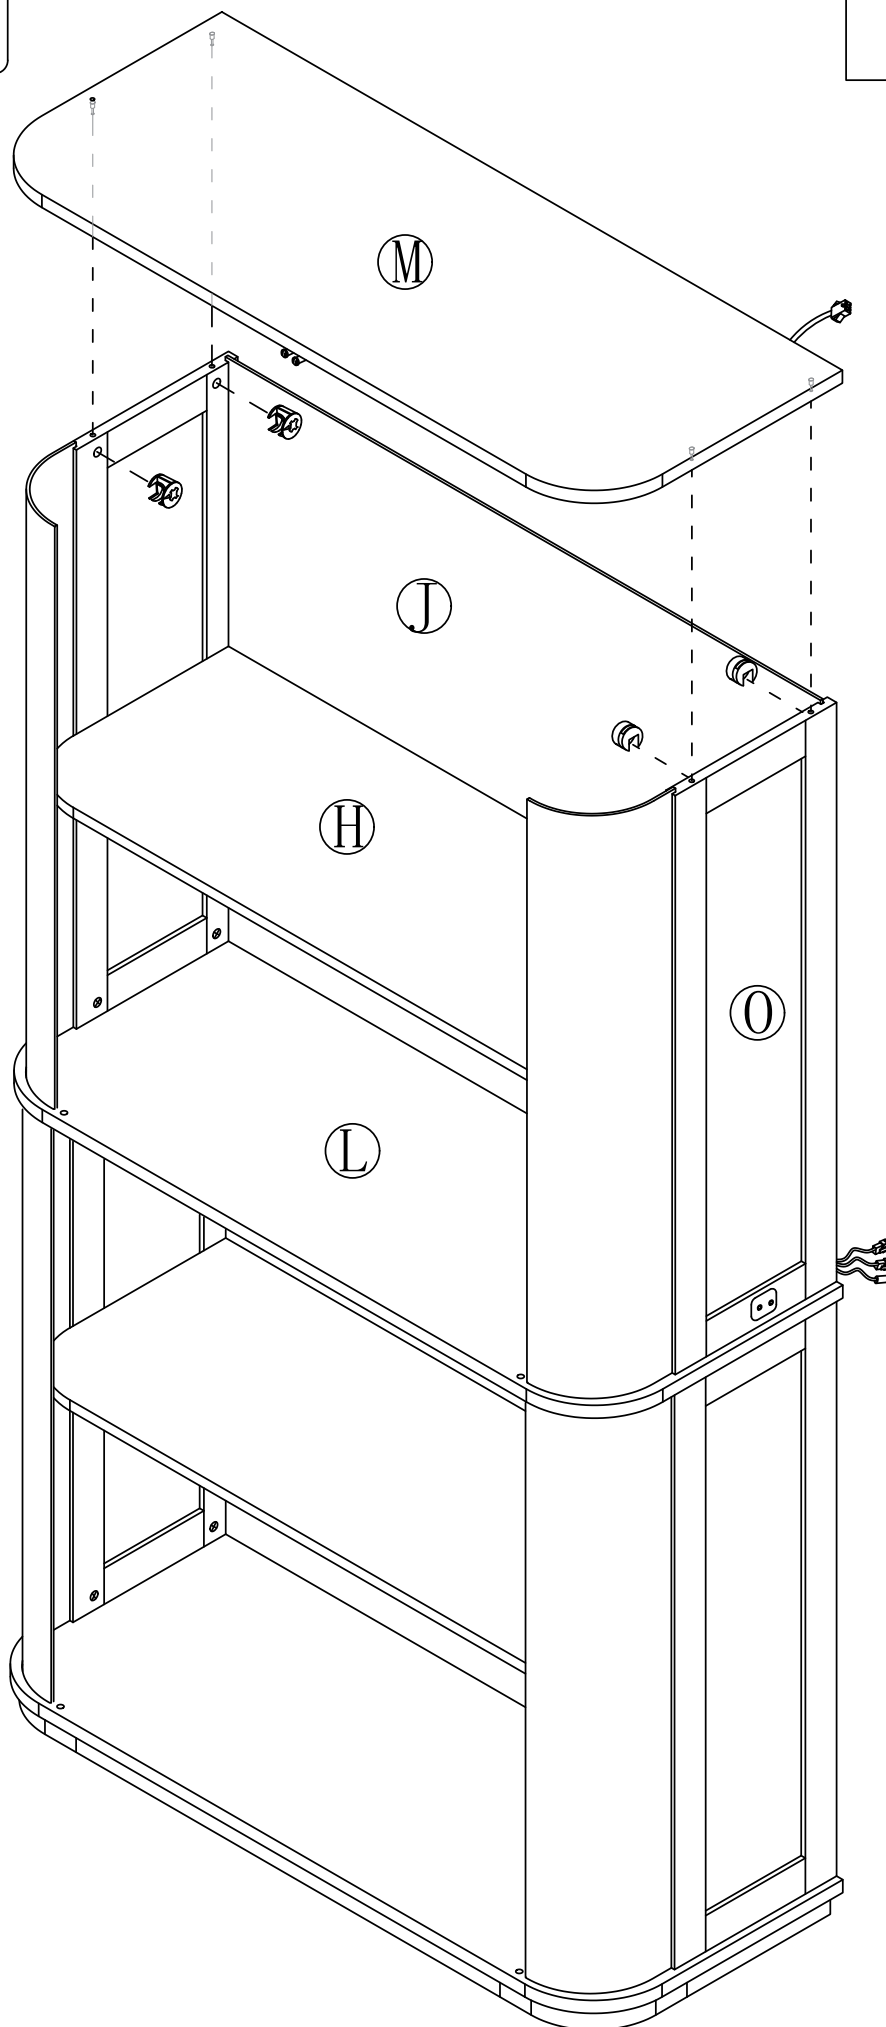


Step 27


⑤  x2

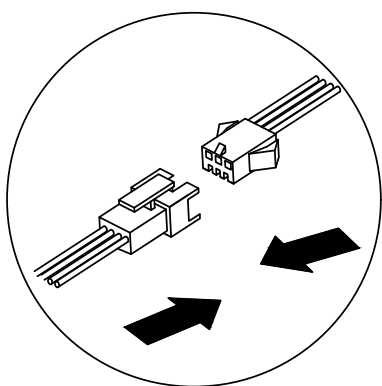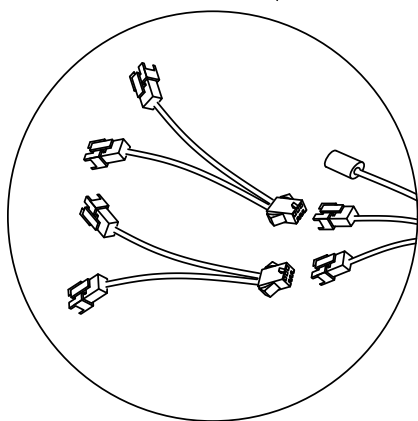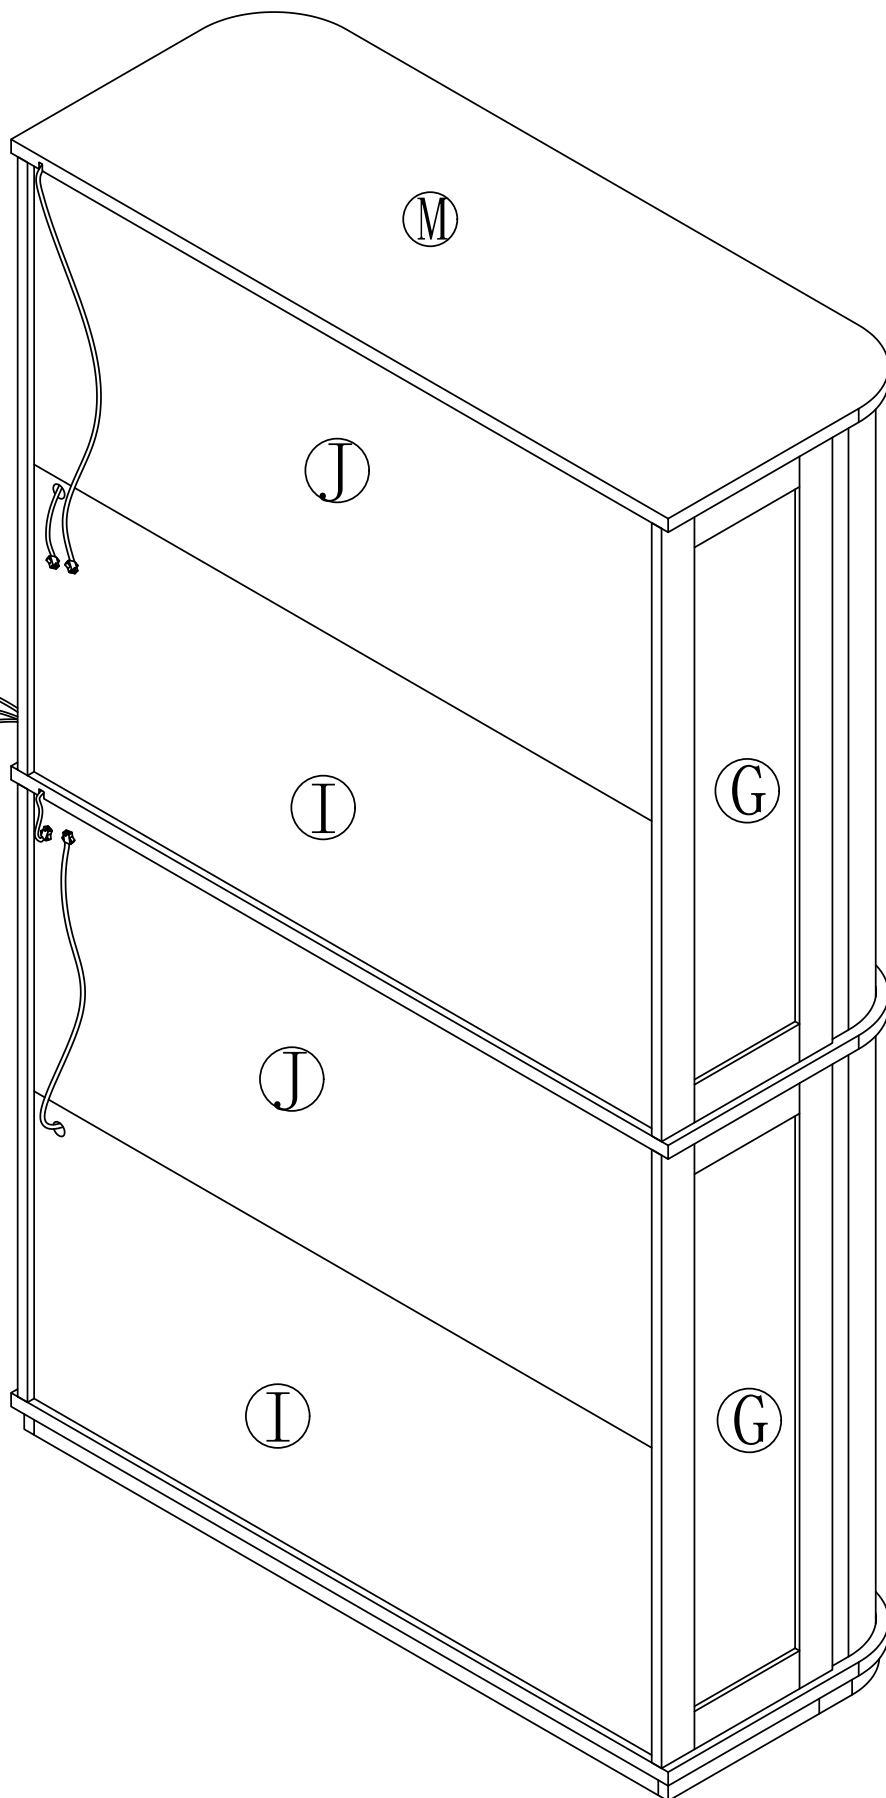


Step 28

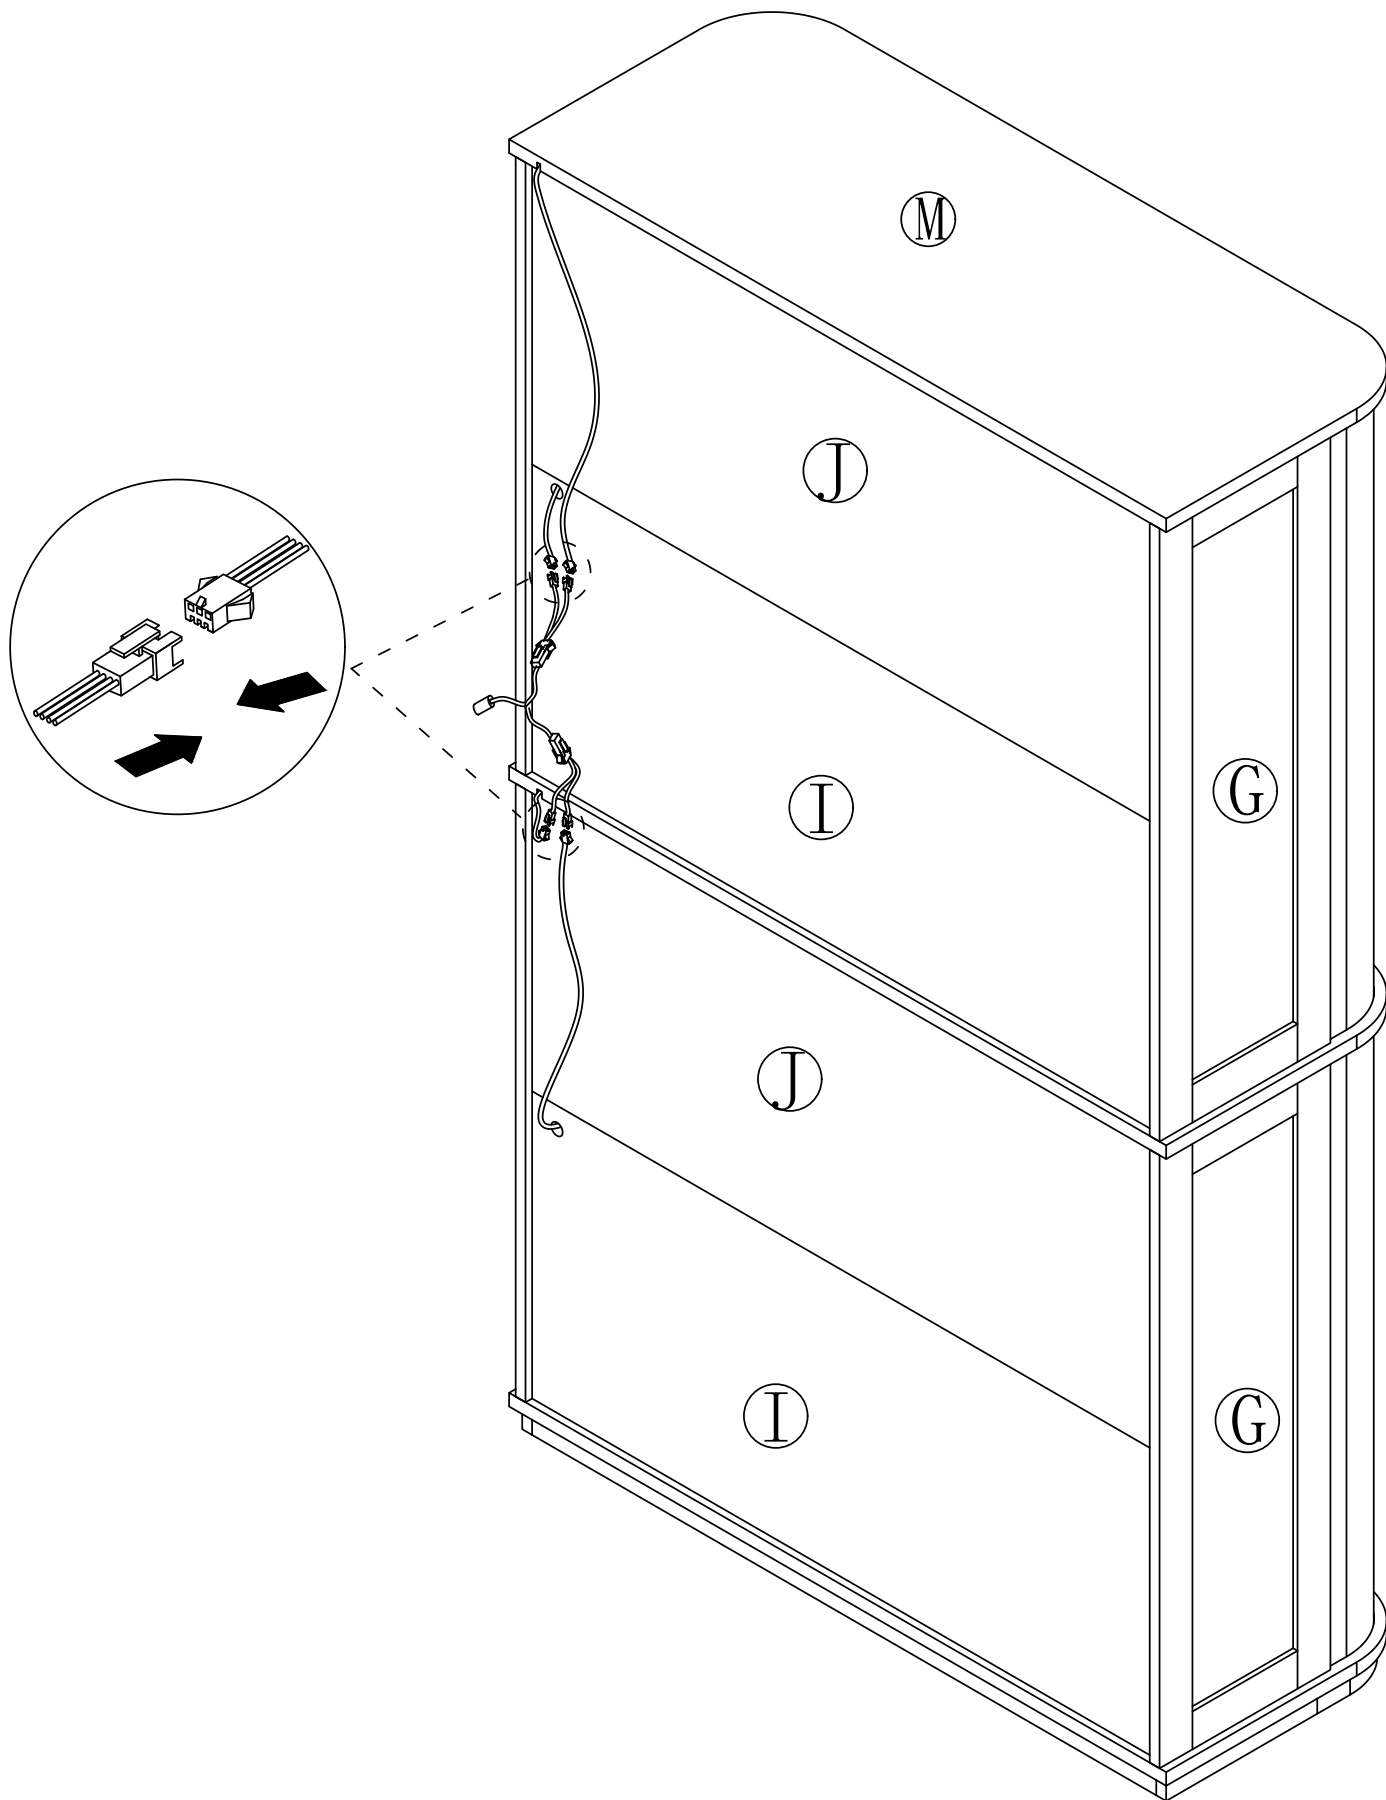





Step 29

6  x3

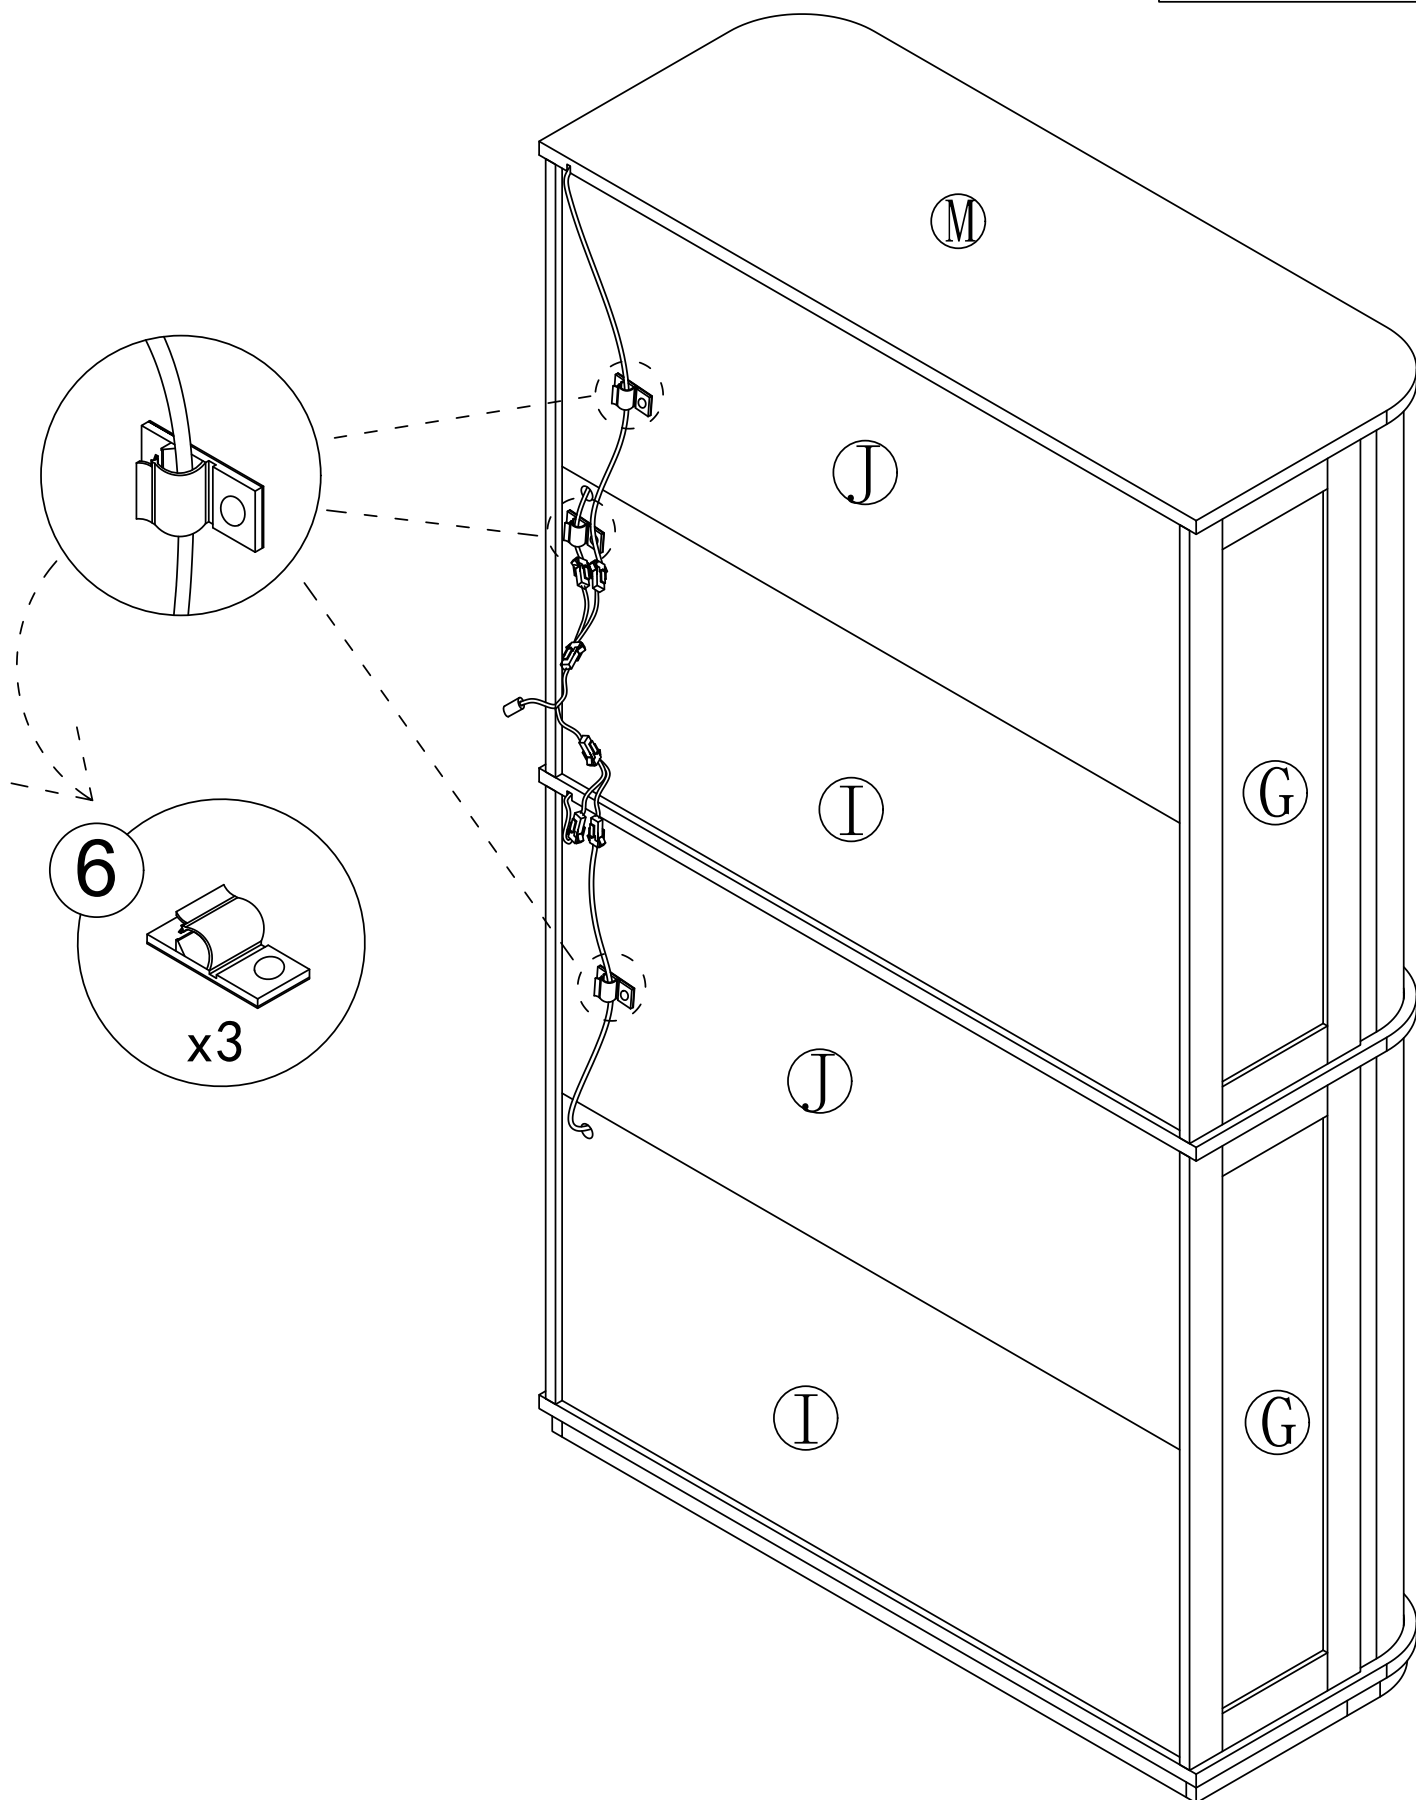


Step 30

7  x24

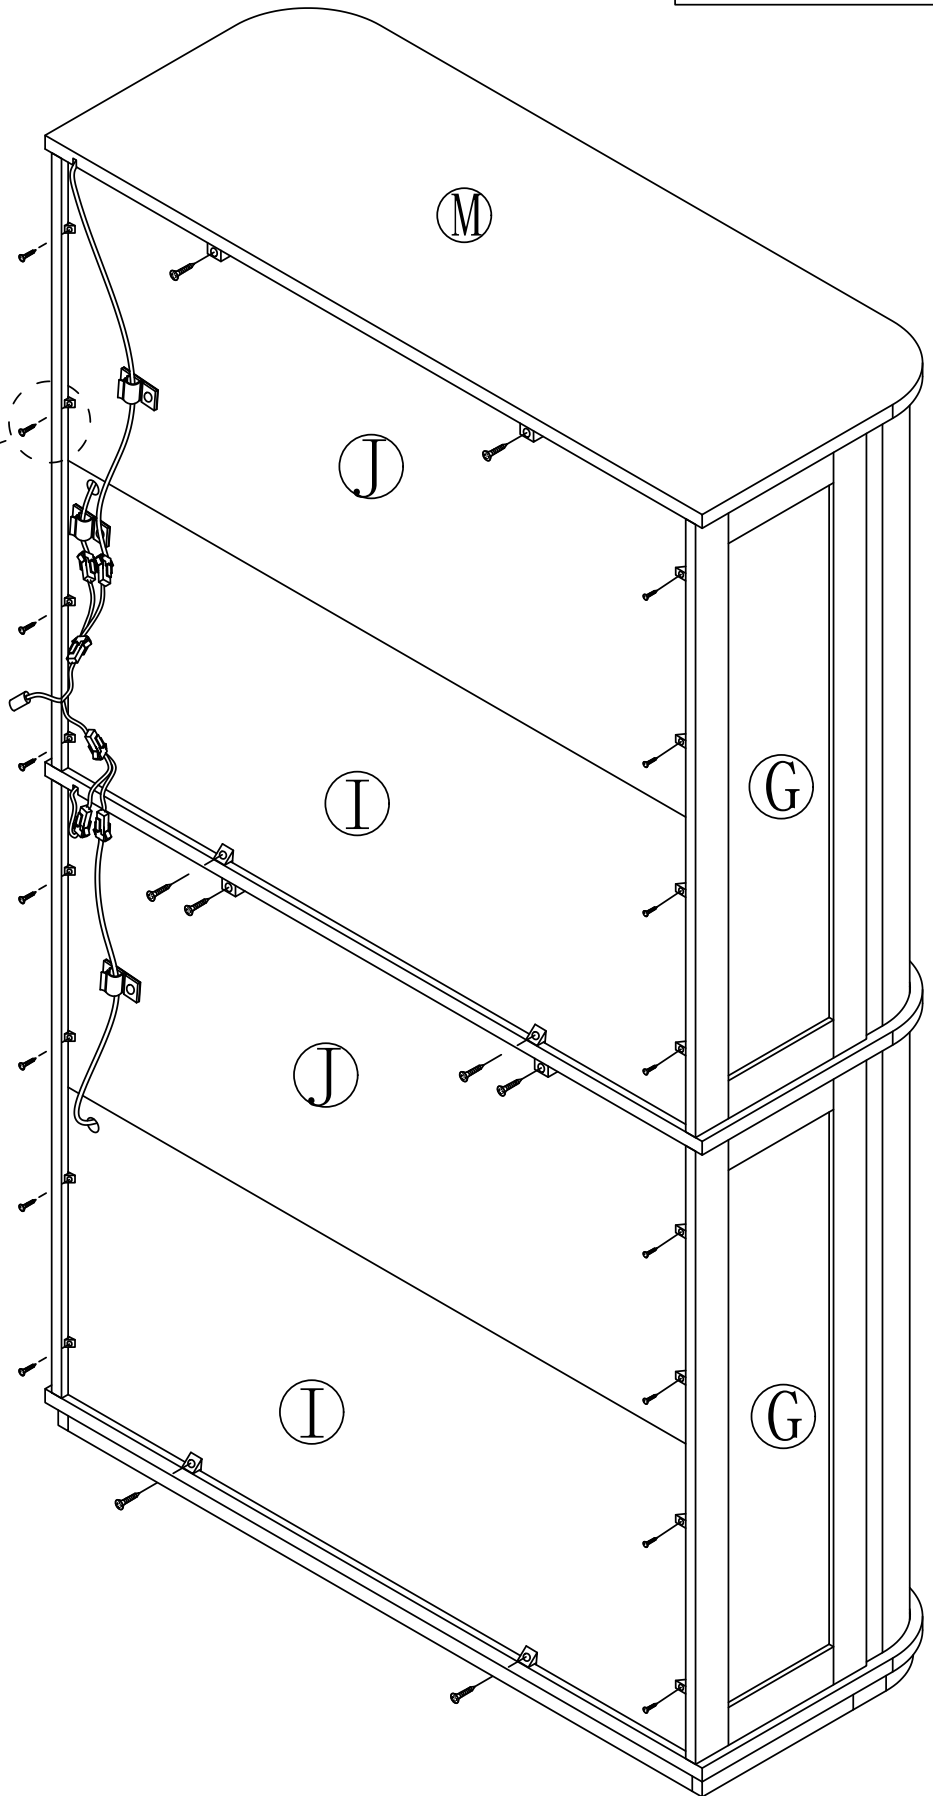
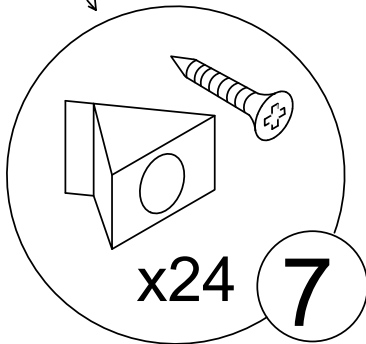
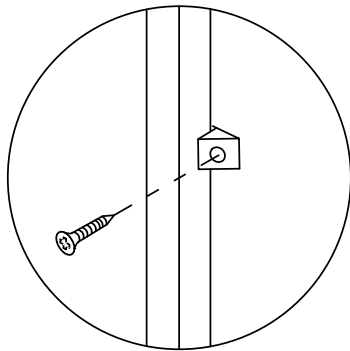


Step 31

8




x6

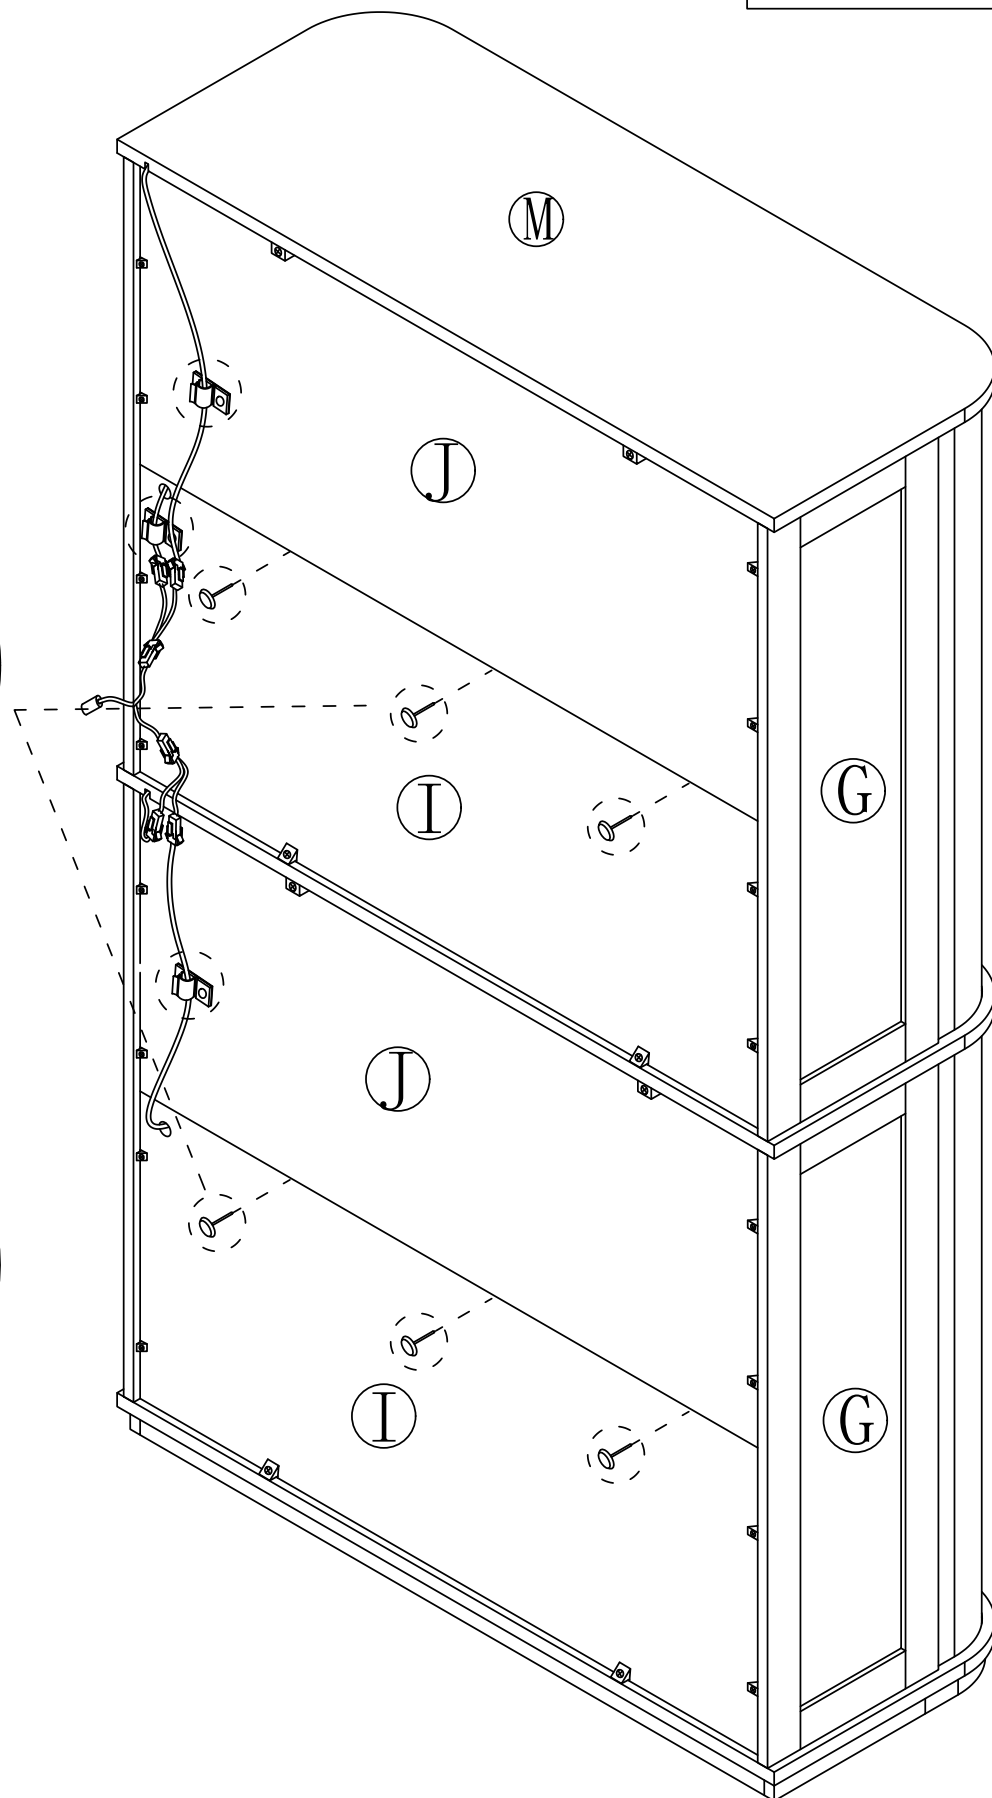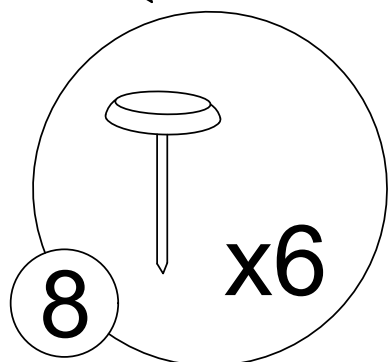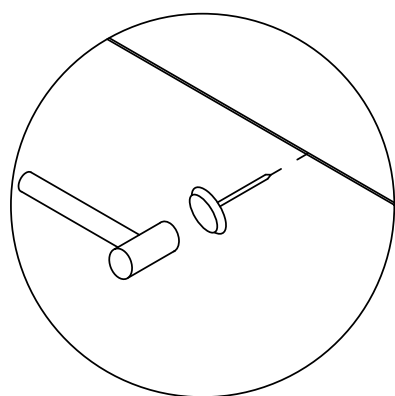


Step 32




First, completely unscrew the screws on the parts



Then take out the black rubber pad from the inside of the part, and the white sponge remains unchanged inside the part.

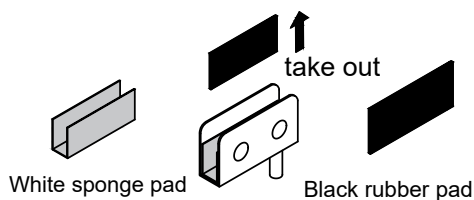

④

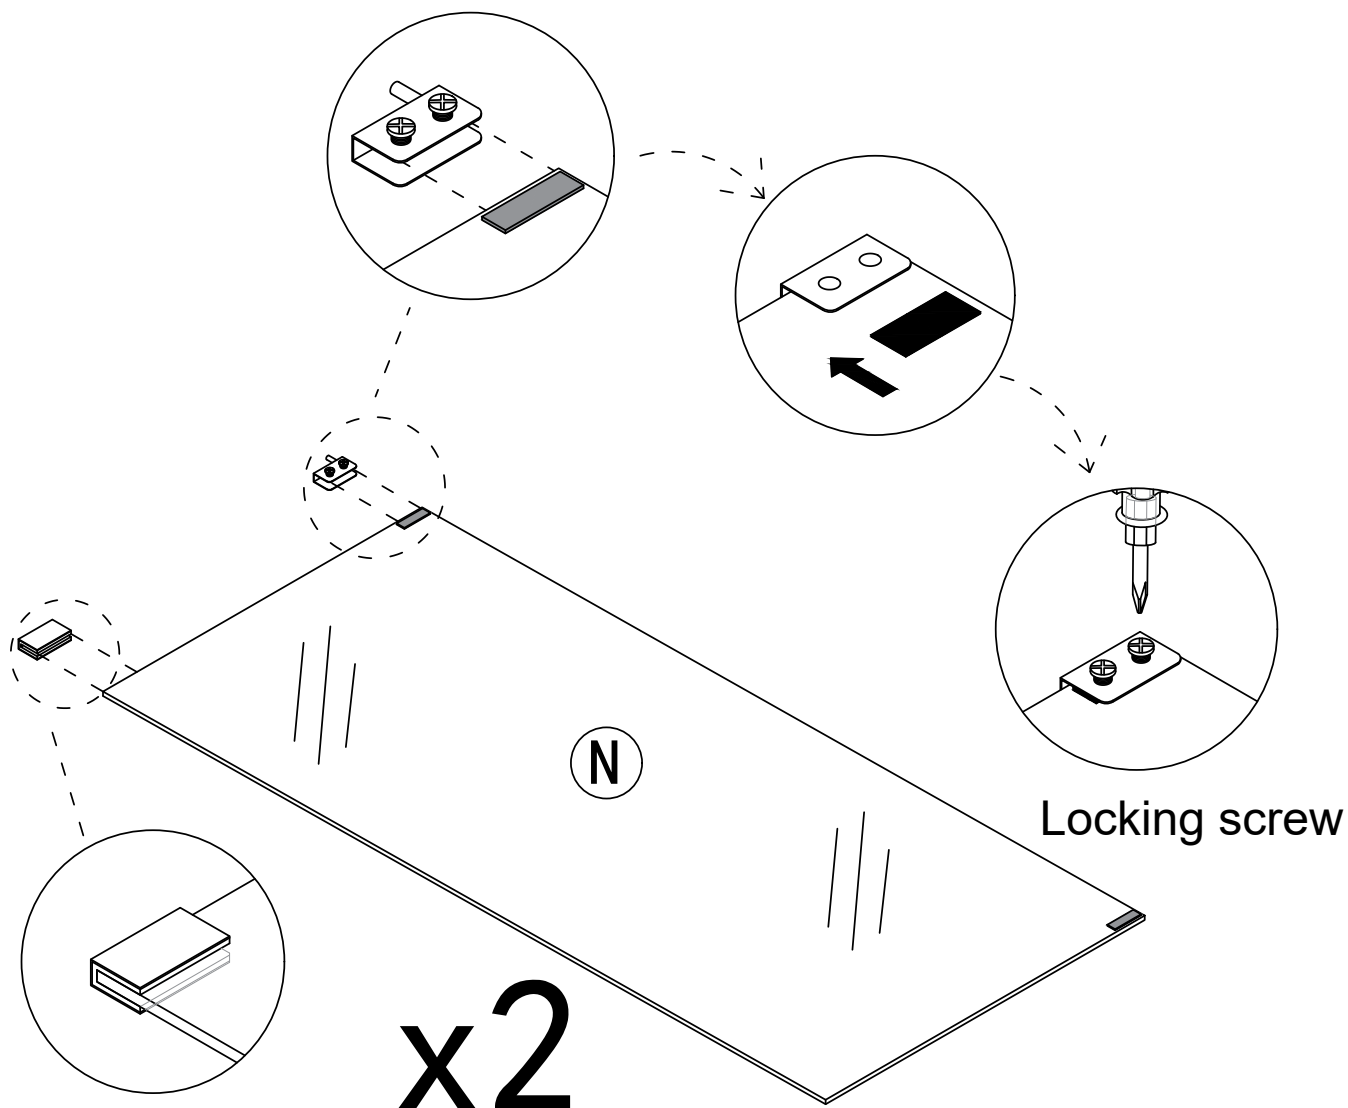


Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction


Place the black gasket on the side where the screws are installed

Step 33


④



x2





x2

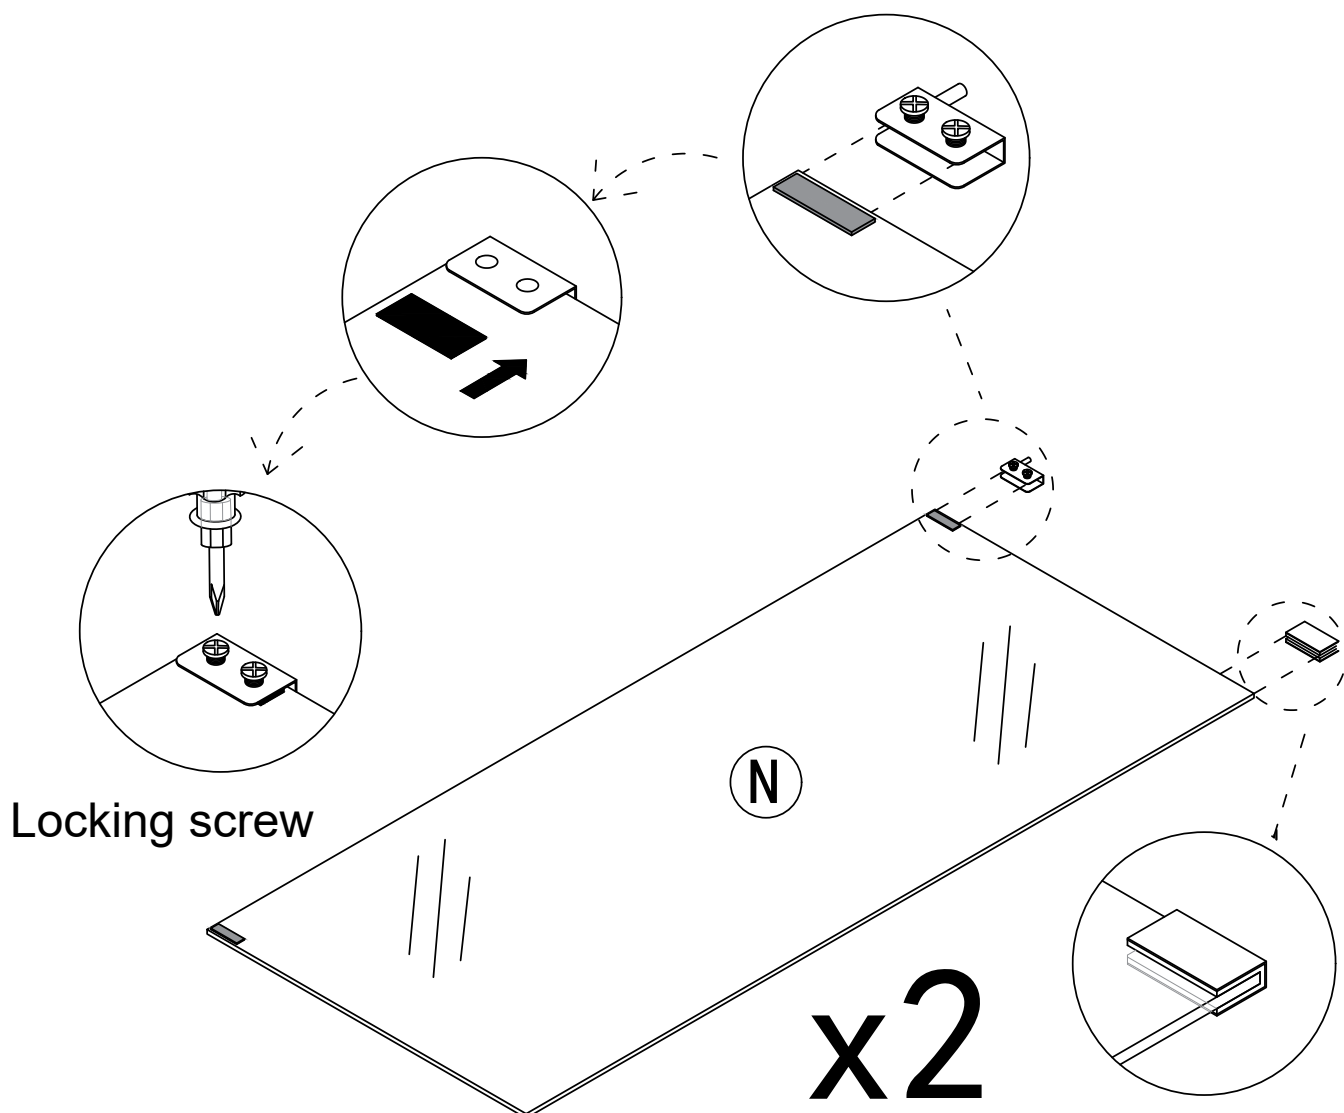

Pay attention to the direction of the door hinge,
rotate the screws to compress the black gasket,
and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed

Step 34

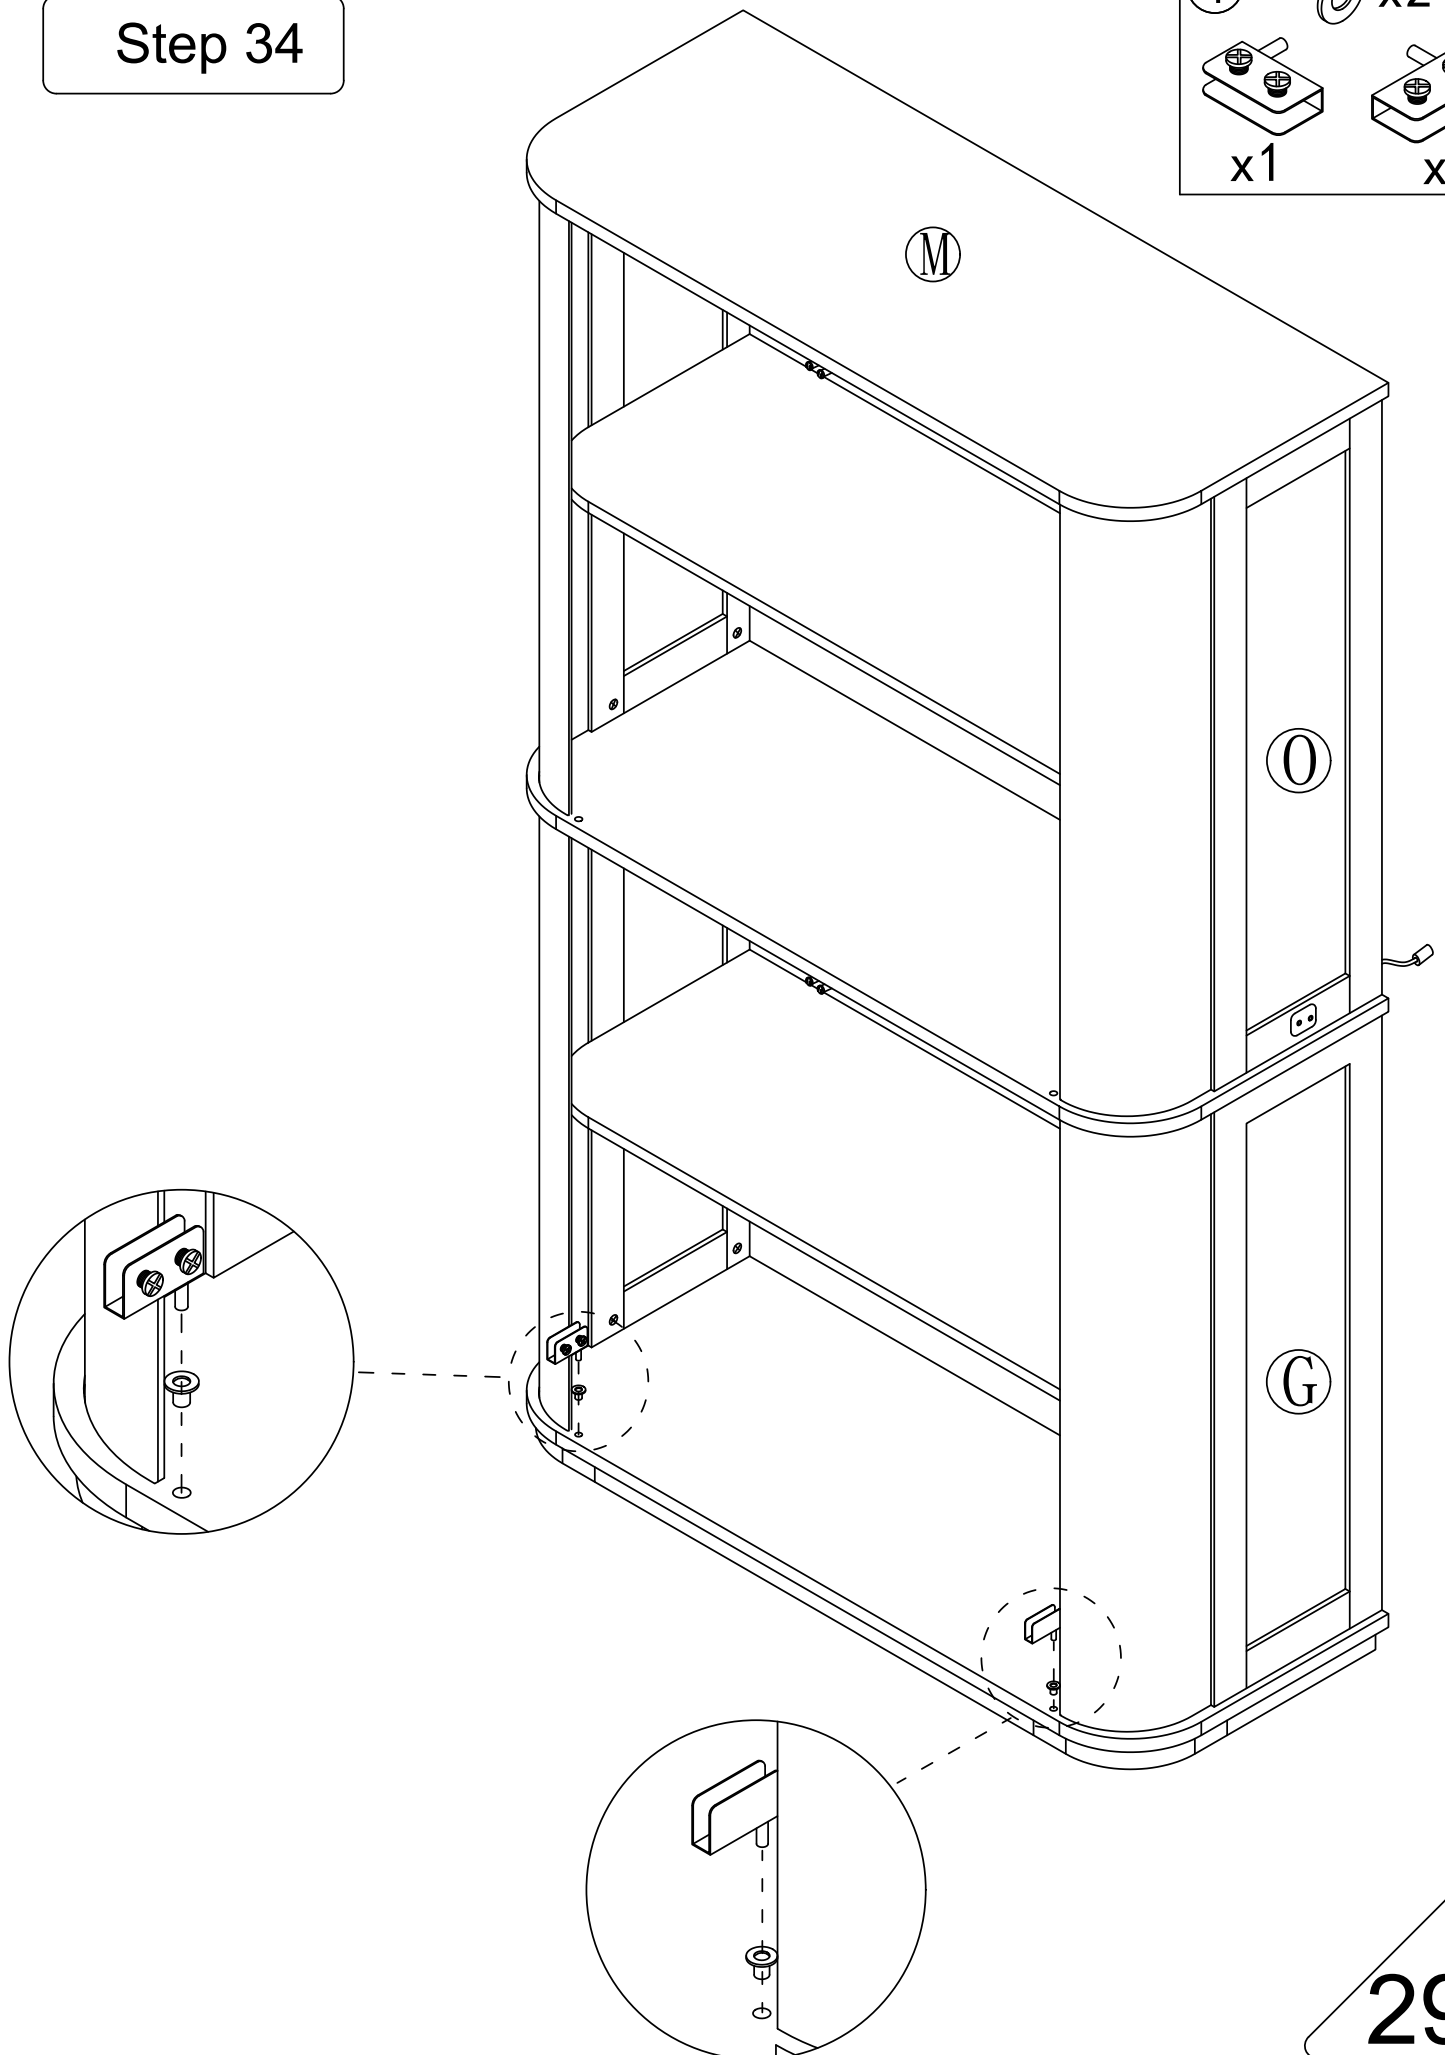

Step 35


Pay attention to the direction of the door hinge during installation

④




x2

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.




first




second

After installing the glass door, place the black gasket on the side where the screws are installed





third

Locking screw

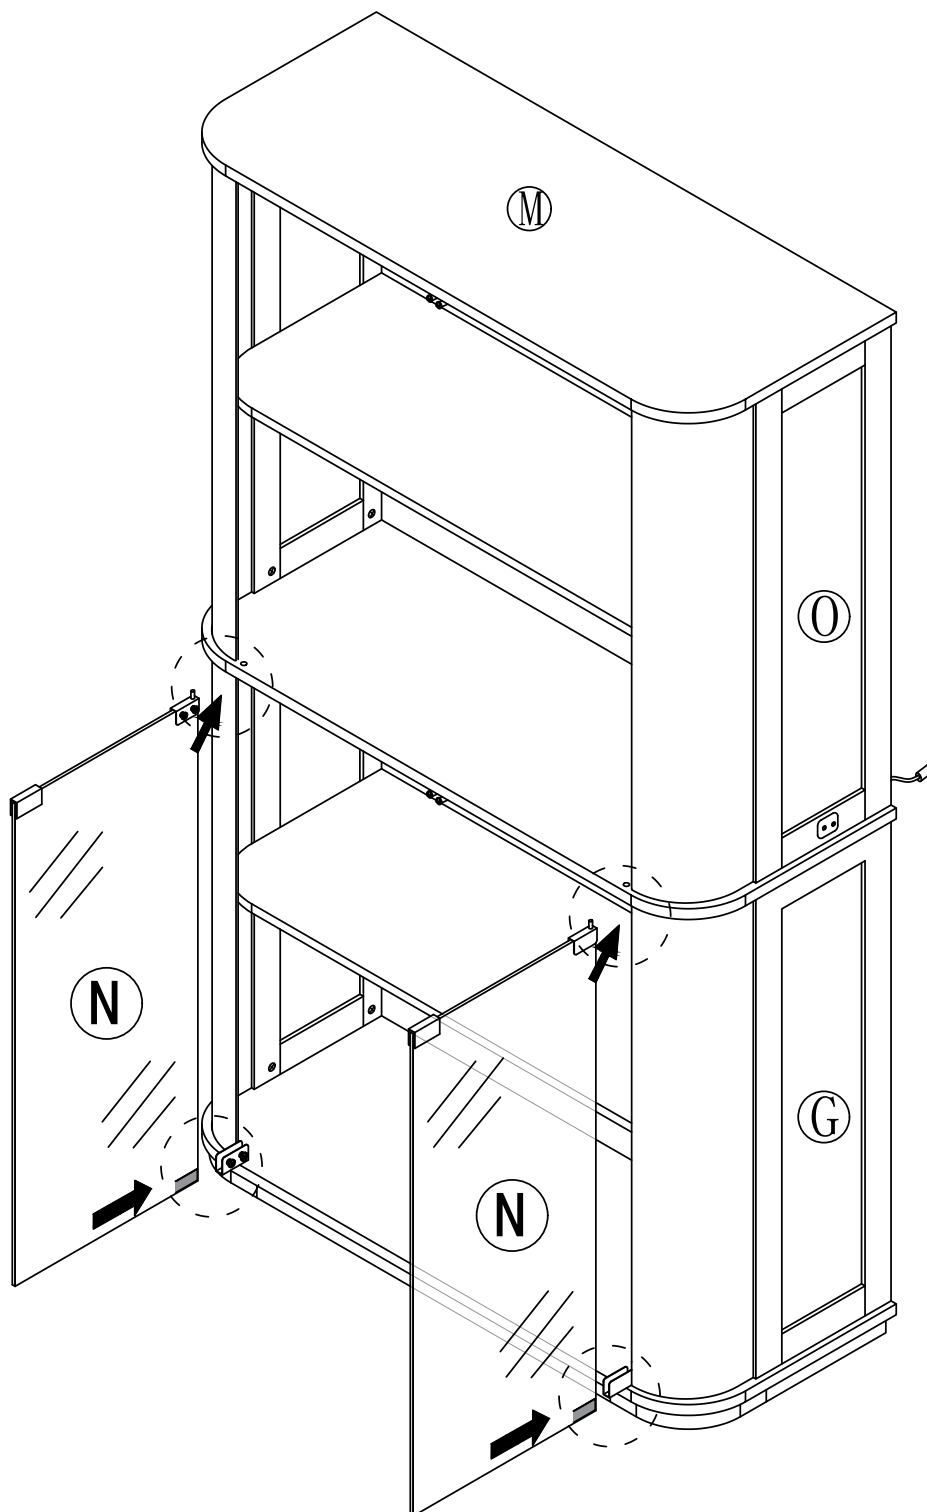

30


Step 36

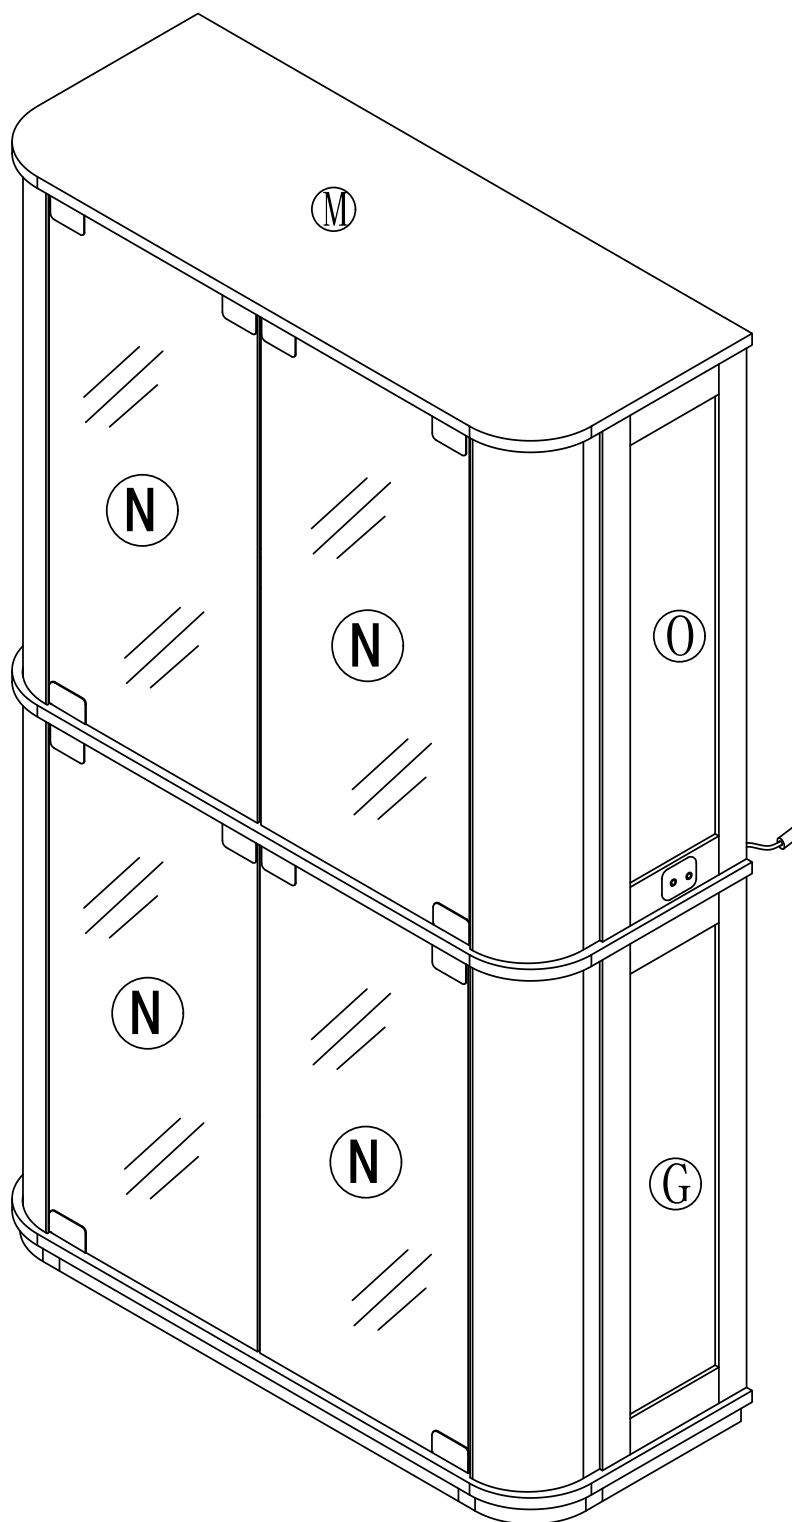


Repeat the door installation steps.

Step 37


The rebound device automatically opens and closes by pressing

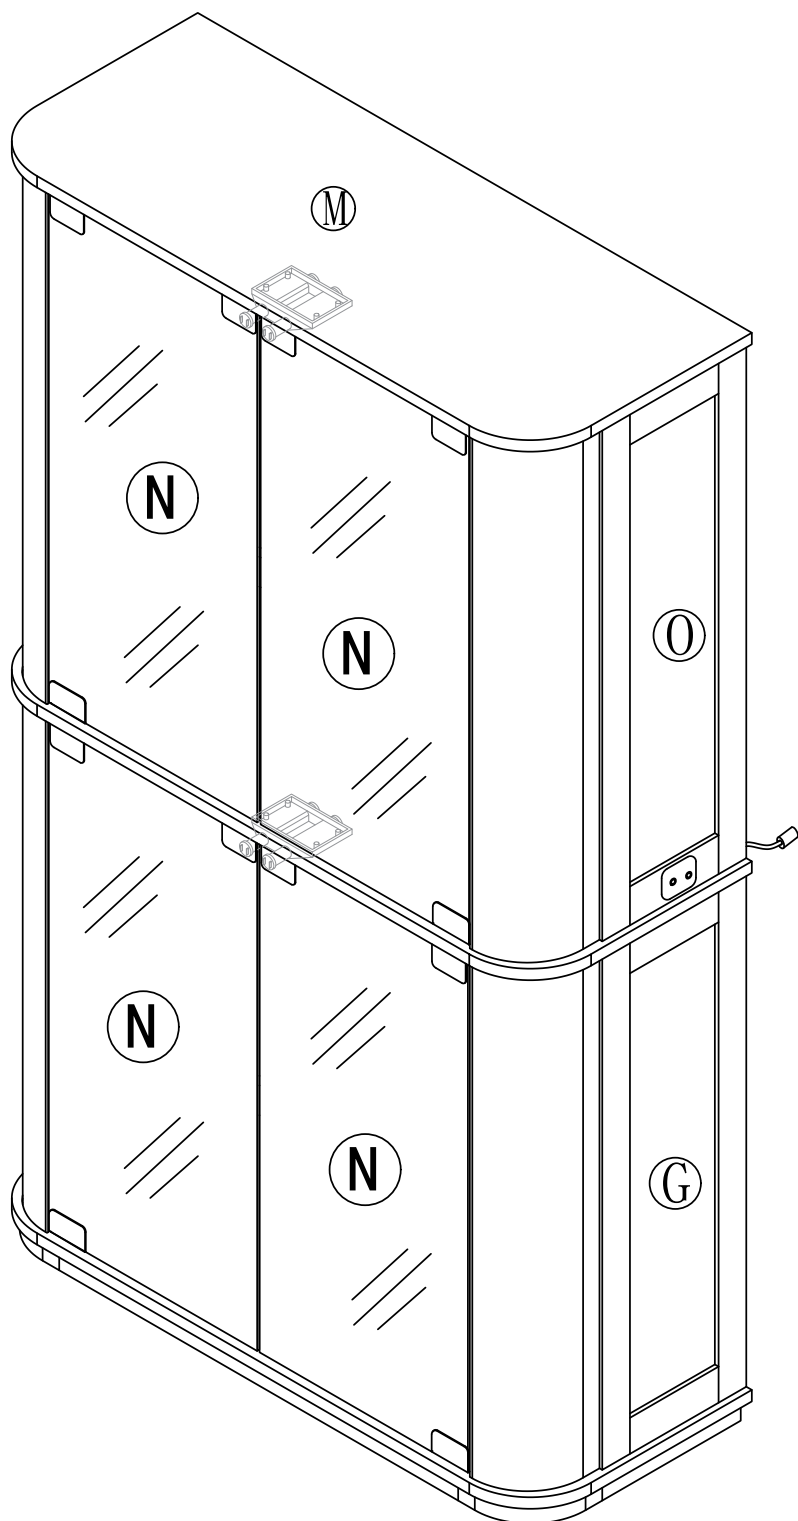


Open the glass door

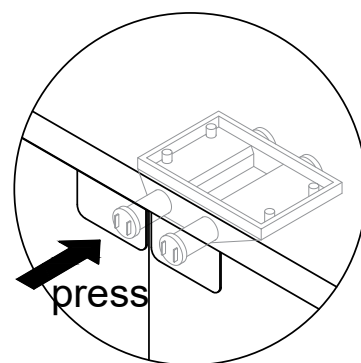


Close the glass door

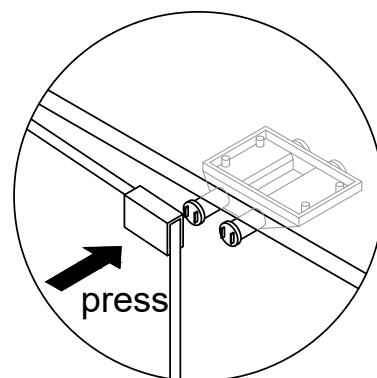

Step 38




x1

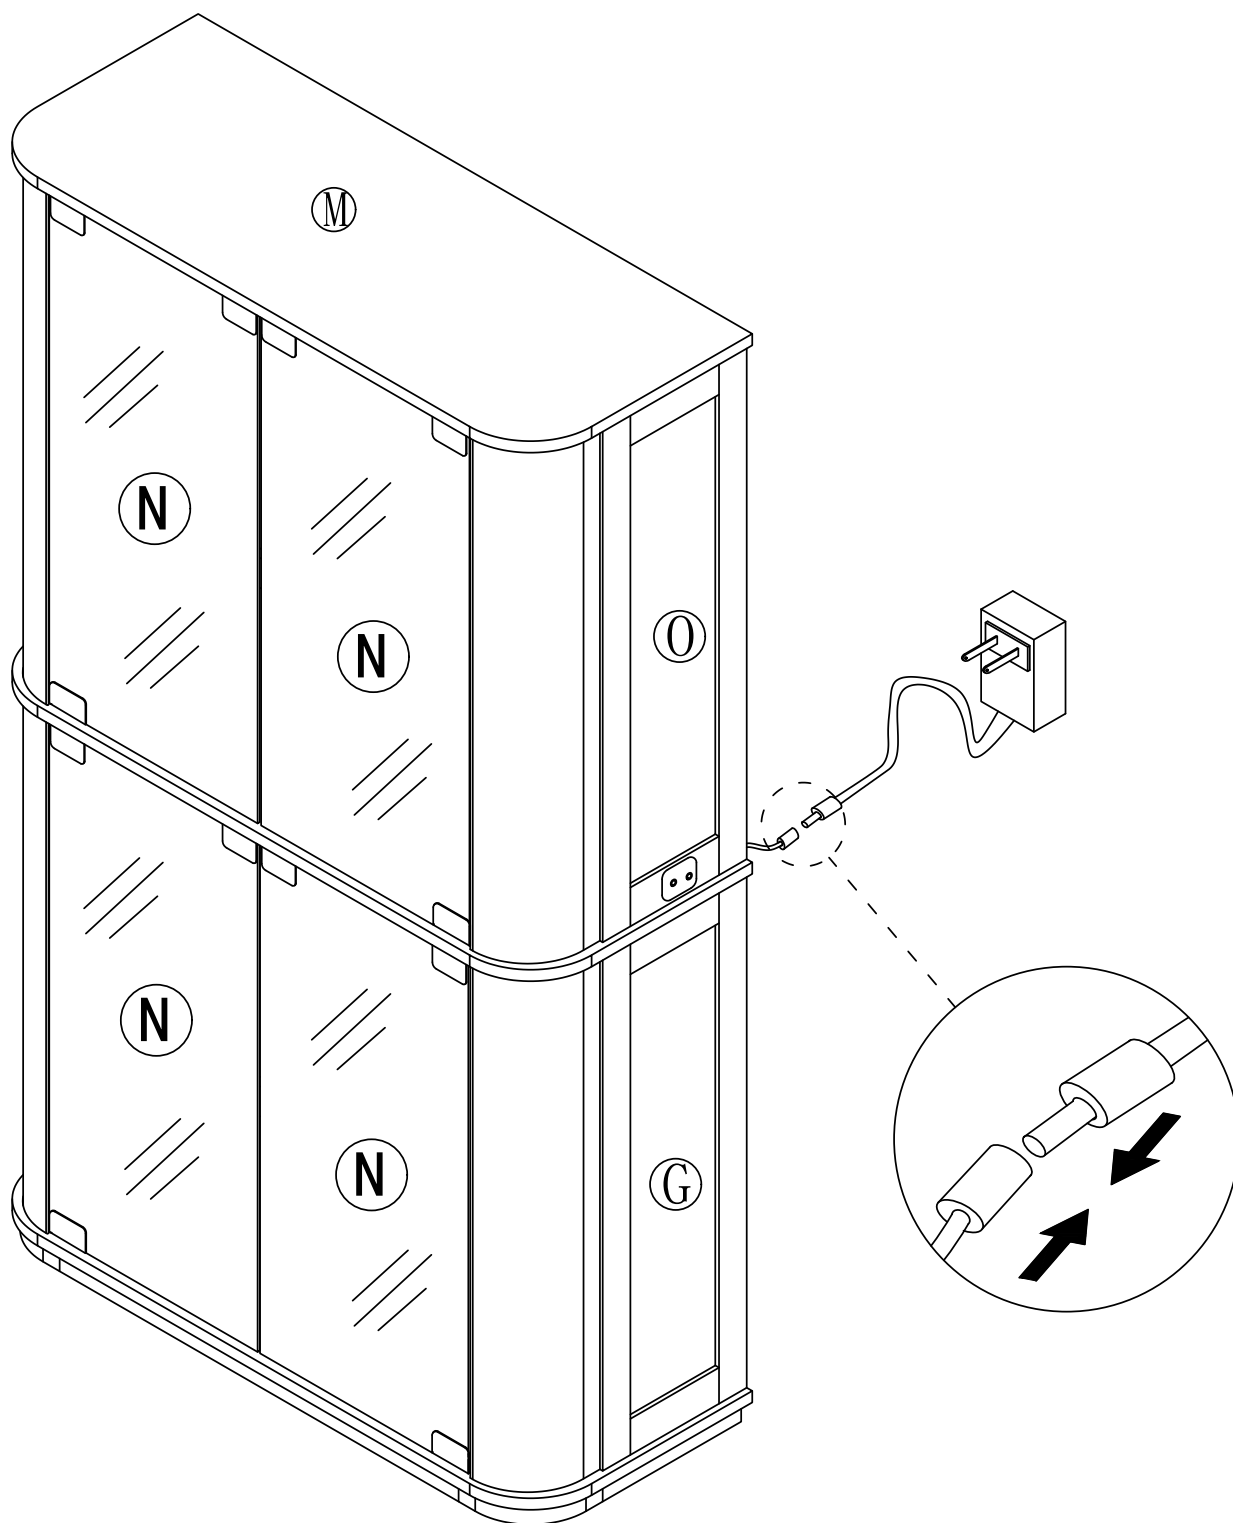

Step 39

9





x2




x2

x2



3.5x14mm

Install the anti fall hardware on the cabinet as shown in the picture first

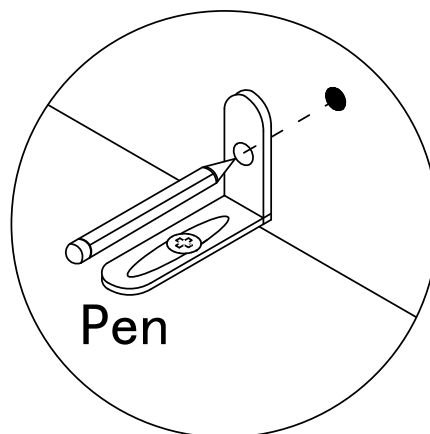

Pen

Then mark the wall with a pen through the holes in the anti-fall hardware



Step 40

9


x2

x2 x2


Wall Mount

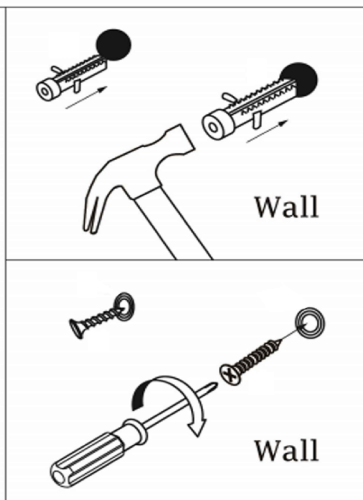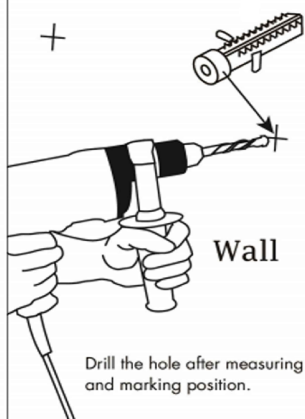

Drill the hole with an electric drill and punch in the colloidal particles

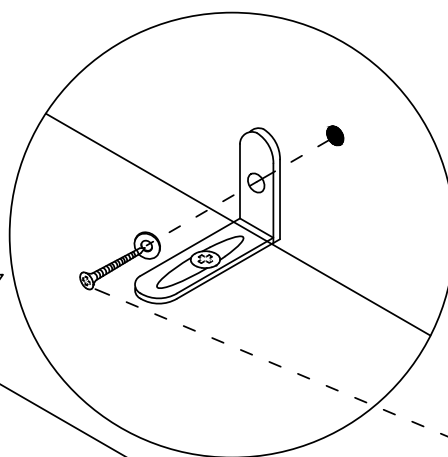

4x45mm



wall

Fasten the cabinet to the wall


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

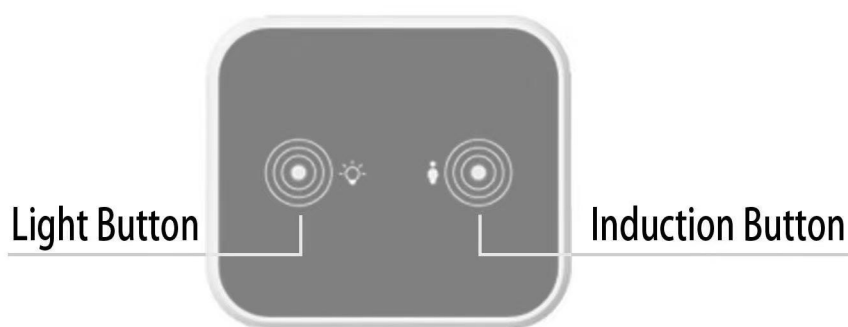

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. B. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.