

# Installation manual for:

Dimensions:D43.5" H46" L18

Inside Fixture Dimensions:D35" H28.5"

Bulb Type:E12 bulb not included

Lamp Frame Weight(lbs):32.4

Total Weight(lbs):43.2

Thank you for choosing our product(s).


Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.













If you have any questions, our professional customer service team is committed to assisting you,















Please use the parts list to ensure you are not missing any parts

1130G43













# PARTS LIST

part	picture	Description	Qty	Check list
ZA		4"Crossbar	1	
ZB		6"Ceiling canopy	1	
ZC		Canopy ring	1	
ZD		ROD1020	1	
ZE		L59"Chain06T Twist Design	1	
ZF		Power Cord 12' SPT-1-16# Clear/Black	1	
P1		Quick link	1	
P2		Loop	1	
P3		7.9"Glass pillar	1	
P4		Threaded pipe	1	
P5		Cover	1	
P6		4"Metal cover	1	

03

part	picture	Description	Qty	Check list
P7		Metal arm(01)	6	
P8		Metal arm(02)	6	
P9		3"Metal tube	18	
P10		Nut cap	1	
P11		Cylinder Screw Connector	1	
P12		5"Metal cover	1	
P13		Finial	2	
P14		Lamp body(1)	1	
P15		Lamp body(2)	2	
P16		Lamp body(3)	7	
P17		Lamp body(4)	1	
P18		Lamp body(5)	2	

04

part	picture	Description	Qty	Check list
A		1050-14#+911-2"	76	
B		1050-14#*9	6	
C		1050-14#+401-40#	1	
D		1050-14#*12+2024-14#+911-3"	12	
E		1050-14#+911-3"	24	
F		1050-14#*2+911-3"	12	
G		1050-14#*8+911-2.5"	6	
H		1050-14#*7+701-40#	1	
I		1050-14#+911-2.5"	18	
J		1130B5.9 Glass dish 5.9"	1	
K		1130B3.9 Glass dish 3.9"	18	
L		1130B4.7 Glass dish 4.7"	1	


05

part	picture	Description	Qty	Check list

06

## step 2


### Canopy Installation Instruction

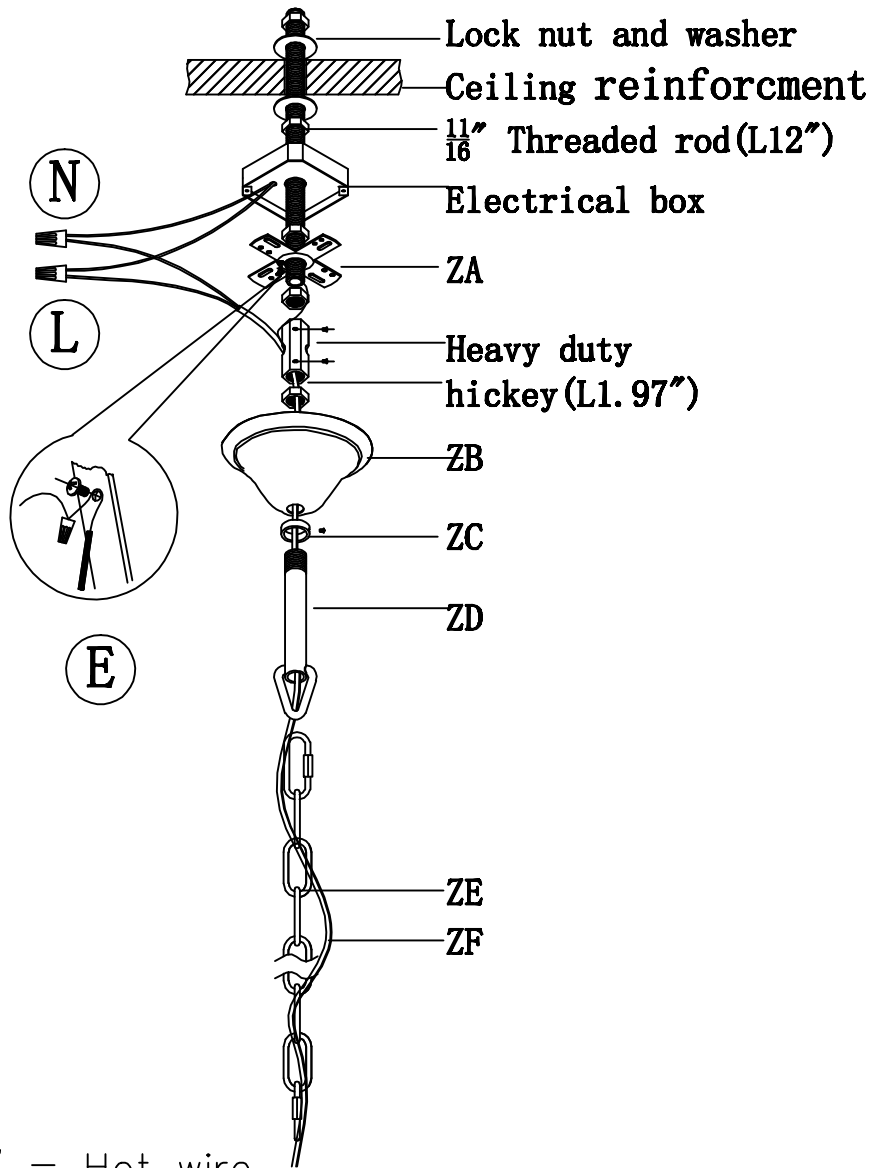

**IMPORTANT:** Test sockets with bulb before dressing the fixture.

- 1 .Drill a  $\varnothing 0.7$ " hole in the ceiling reinforcement to allow a  $1\frac{1}{16}$ " threaded rod to pass through.
- 2 .Attach the electrical box to the ceiling reinforcement and pass the  $1\frac{1}{16}$  threaded rod through the box and secure it to the heavy duty hickey.
- 3 .Pass the fixture wires and ground wire through the loop, canopy ring, center hole of canopy and the heavy duty hickey.
- 4 .Pull ceiling wires down through the fixture box and make connection.
- 5 .Screw loop only onto threaded pipe.
- 6 .Hang the fixture on chain.
- 7 .Secure the canopy with canopy ring.

# Frame Assembly Diagram

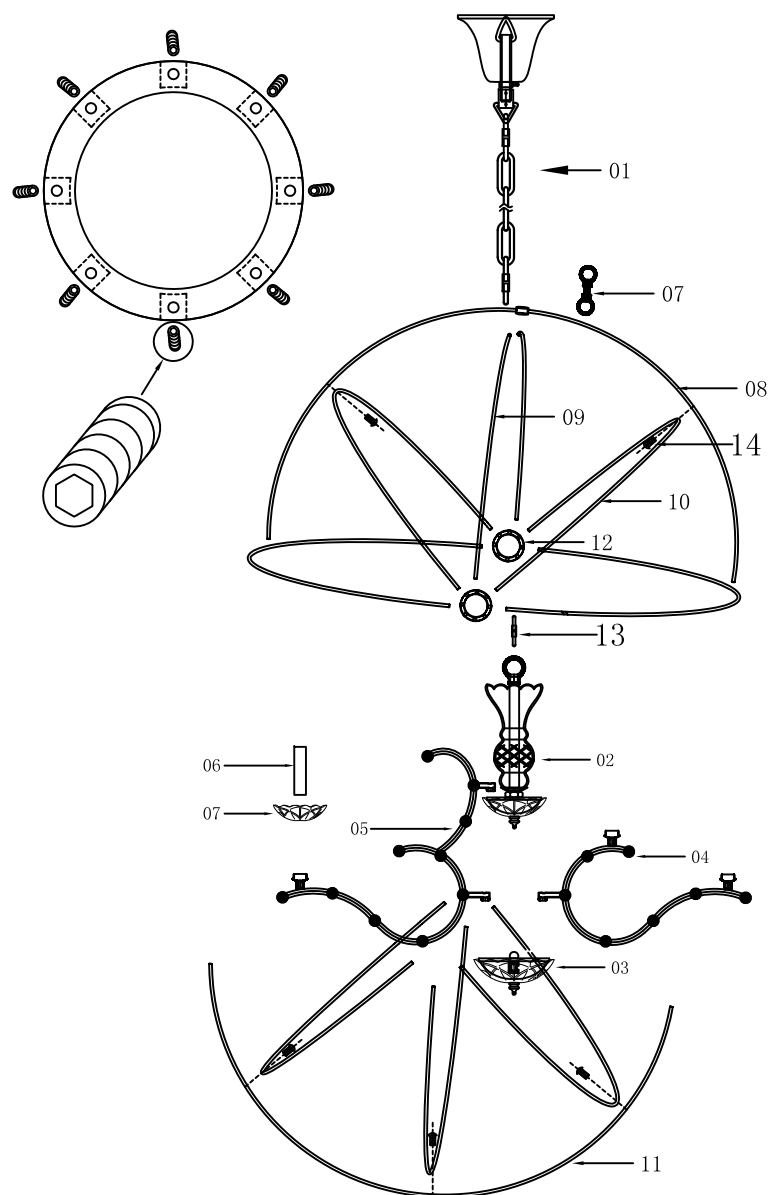

09

## Step 3

# Frame Assembly Instructions

Installation:

Please read all instructions carefully.

Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete.

Please note that each part has been assigned a number.

Please proceed in a numerical order.

1. Hang the chain(01) on the ceiling.
  2. Unscrew the loop(07), screw the loop(07) into the lamp body(08) and screw the lamp bodys(09) together, hang the lamp body(08) on the end of the chain(01) with quick link(13).
  3. Break up the lamp bodys(02, 03), unscrew the nut which on the metal arms(04, 05) then screw the metal arms(04, 05) on the lamp body with nuts which unscrew on metal arms(04, 05).
  4. Hang the lamp body(02) on the end of the lamp body(07) with quick link(12), pull down the main wire through the lamp body(02), connect the wires correctly, install lamp bodys(02, 03).
  5. Assemble the lamp bodys(10) on lamp bodys(12) on by one, then assemble the lamp body(11) together with screws(14).
  6. Install the cage which already install outside frame to the lamp body(08).
  7. Hang the metal tubes(06) and glass dishes(07) on the metal arms(04, 05)
  8. As the crystal dressing instruction, hang the crystal parts.
- PS: When you assemble the outside frame, don't screw tighten, when you already install all outside frame together, you can screw tighten.

The end!

10

## Step 4


### Crystal Dressing Instructions

1. Hang crystal "A", "C", "E", "F", "G", "H", "I".
2. Connect both ends of B with I.  
Connect both ends of D with E.

### Crystal Dressing Diagram



When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

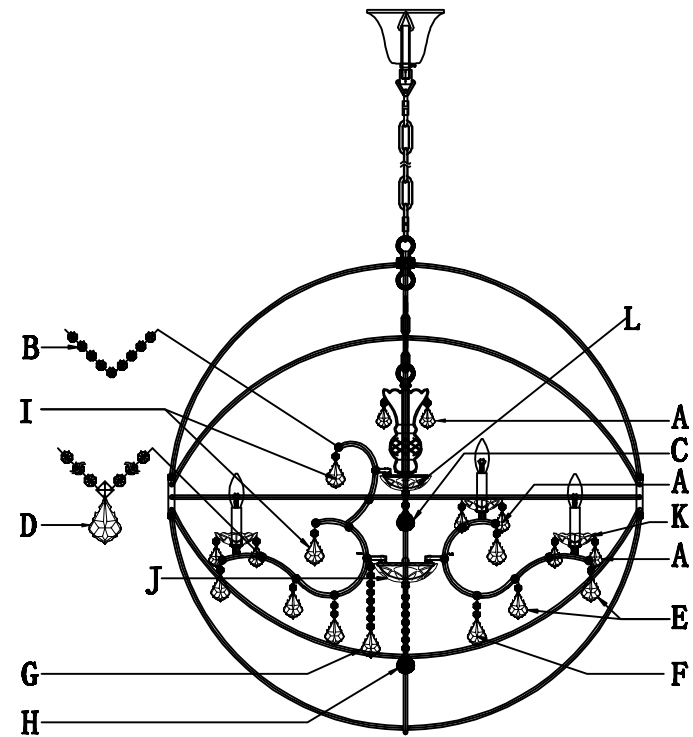

## Congratulations !

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

## Cleaning and Maintenance of Chandelier Frame

The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean, soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

## Cleaning and Maintenance of Crystals

Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

## To Order Crystal Replacement Parts

Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us at the address shown on the reverse side. For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle and faxing it to our customer service department. You will be contacted with prices prior to shipment. All orders must be pre-paid.

## Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of two(2)years from the date of purchase. Our company will at its option, repair or replace any frame that has a defect in the material or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department at the address and phone number shown below. A written return authorization form will be sent to you with specific instructions.

## Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department at the address on the reverse side. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warranty, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.