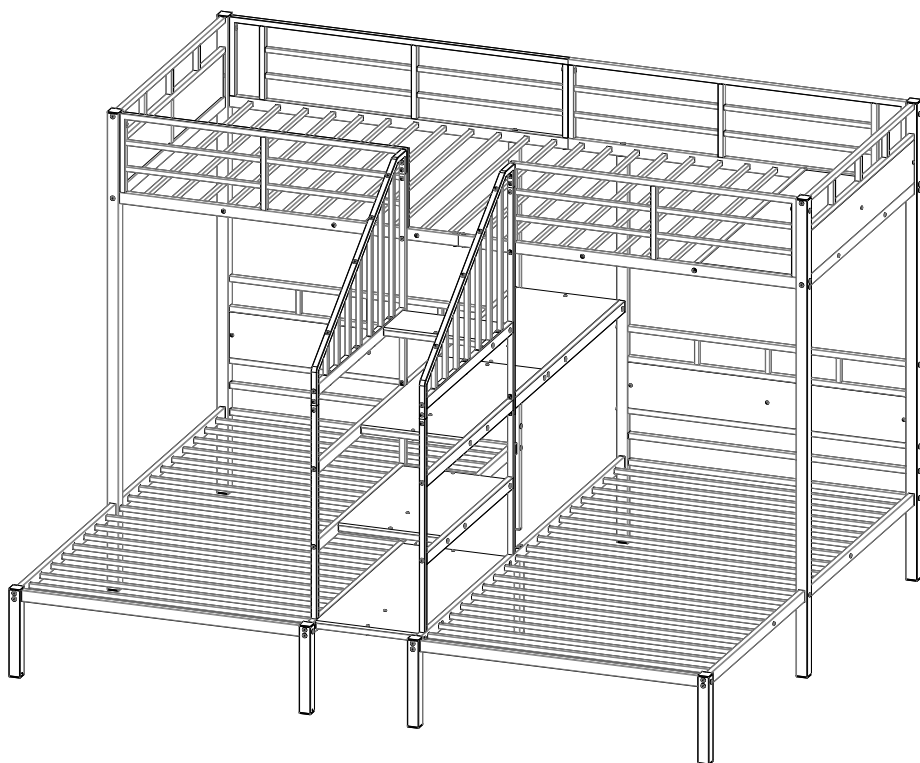


Assembly instructions

Product code: BW00525AAB

Twin XL over (Twin + Twin)



SAFETY WARNINGS AND GENERAL NOTES:

1. Follow the information on the warnings on the bunk bed end structure and on the carton. Do not remove the warning label from the bed.
2. Always use the recommended size mattress on mattress support, or both, to help prevent the likelihood of entrapment or falls.
3. Do not allow children under 6 years of age to use the upper bunk.
4. Periodically check and ensure the guardrail, ladder and other components are in their proper position, free from damage, and all connectors are tight.
5. Do not allow horseplay on or under beds.
6. Always prohibit jumping on the bed.
7. Prohibit more than one person on upper bunk.
8. Always use the ladder for entering and leaving the upper bunk.
9. Do not use substitute parts. Contact the manufacturer or dealer for replacement parts.
10. Use of a night-tight may provide added safety precaution for a child using the upper bunk.
11. Always use guardrails on both long sides of the upper bunk.
12. If the bunk bed will be placed next to a wall, the guardrail that runs the full length of the bed should be placed against the wall to prevent entrapment between the bed and the wall.

The use of water or sleep flotation mattresses is prohibited.

13. **STRANGULATION HAZARD**-Never attach or hang items to any part of the bunk bed that are not designed for use with the bed ; for example, but not limited to, hooks, belts and jump ropes.
14. Keep these instructions for future reference.
15. We recommend assembling your bunk bed on the shipping carton to protect your floor or carpet.
16. Be certain all staples are out of the box before beginning assembly on the shipping carton.
17. USE ONLY MATTRESSES WHICH ARE AS THE TABLE BELOW ON UPPER AND ON LOWER BUNKS.

Down bed

Bed type	Length	Width	Thickness
Twin Standard	74" - 75"	38 ½"	8" max

Up bed (bunk bed and tribed included)

Bed type	Length	Width	Thickness
Twin XL Standard	79" -80"	38 ½"	6" max

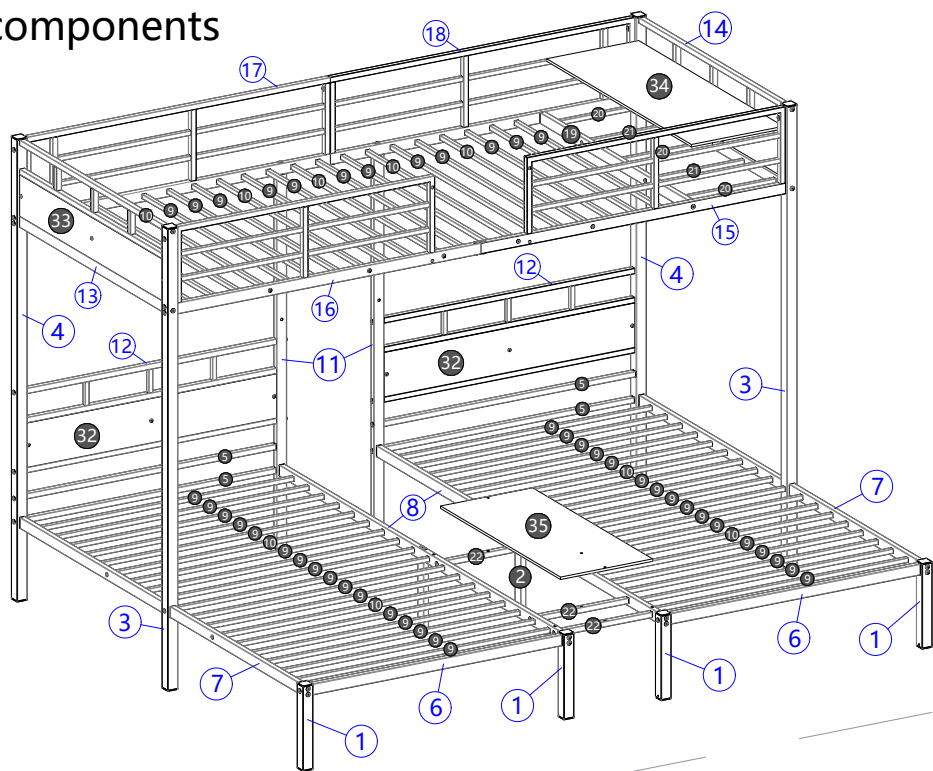
(A storage board has been added, so you can put both the twin mattress and the twin xl mattress, and there is also an additional storage space.)

18. SURFACE OF MATTRESS MUST BE AT LEAST 5"(127MM) BELOW THE UPPER EDGE OF GUARDRAILS.

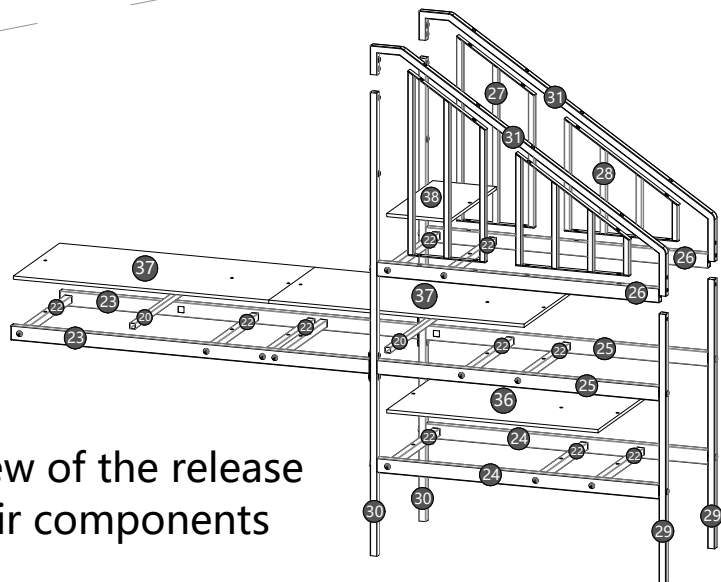
19. Replacement Parts:

Replacement Parts, including additional guardrails, may be obtained from any of our (Shenzhen Yuefeng Zhiqi Technology Co., Ltd) dealers.




















Release preview of bed components










Preview of the release of stair components





List of components

						 	
1-4pcs					7-2pcs	9-47pcs	
						 	
2-2pcs	3-2pcs	4-2pcs	5-4pcs	6-2pcs	8-2pcs	10-9pcs	11-2pcs
							
12-2pcs	13-1pcs	14-1pcs	15-1pcs				
							
16-1pcs	17-1pcs	18-1pcs	19-1pcs				
							
20-5pcs	21-2pcs	22-14pcs	23-2pcs				
							
24-2pcs	25-2pcs	26-2pcs	27-2pcs				
							
28-2pcs	29-2pcs	30-2pcs	31-2pcs				

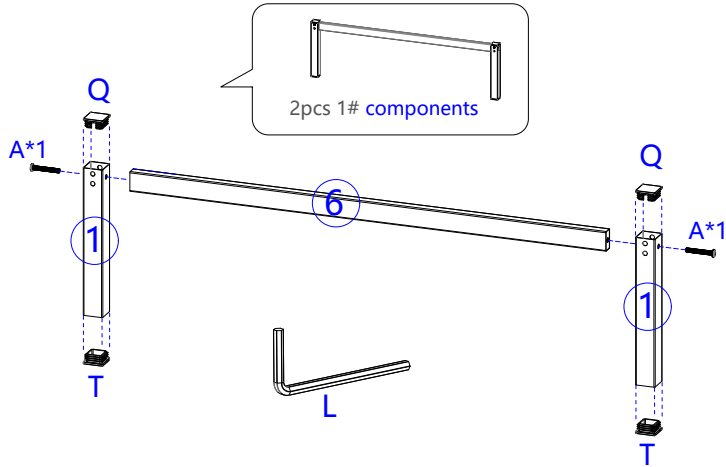
Board list

			
32-2pcs		33-2pcs	
			
34-1pcs	35-1pcs	36-1pcs	
		A total of 10pcs	
37-2pcs	38-1pcs		

HARDWARE LIST

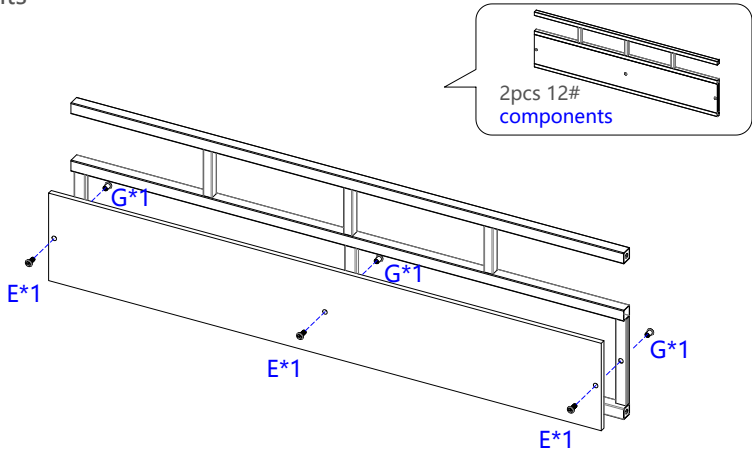
						
A	B	C	D	E	F	G
M8*55-62pcs	M8*30-52pcs	M8*15-52pcs	ΦM8*16-29pcs	M6*15-12pcs	M6*25-14pcs	ΦM6*10-26pcs
						
T	Q	Y	H	P		
40*40F-8pcs	40*40FQ-8pcs	20*40-4pcs	18*60 -7pcs	M8*35-8pcs	M4*25-2pcs	2pcs

Step 1: Use hardware A, T, Q, L to connect #1 and #6 together. Get 2 1# components



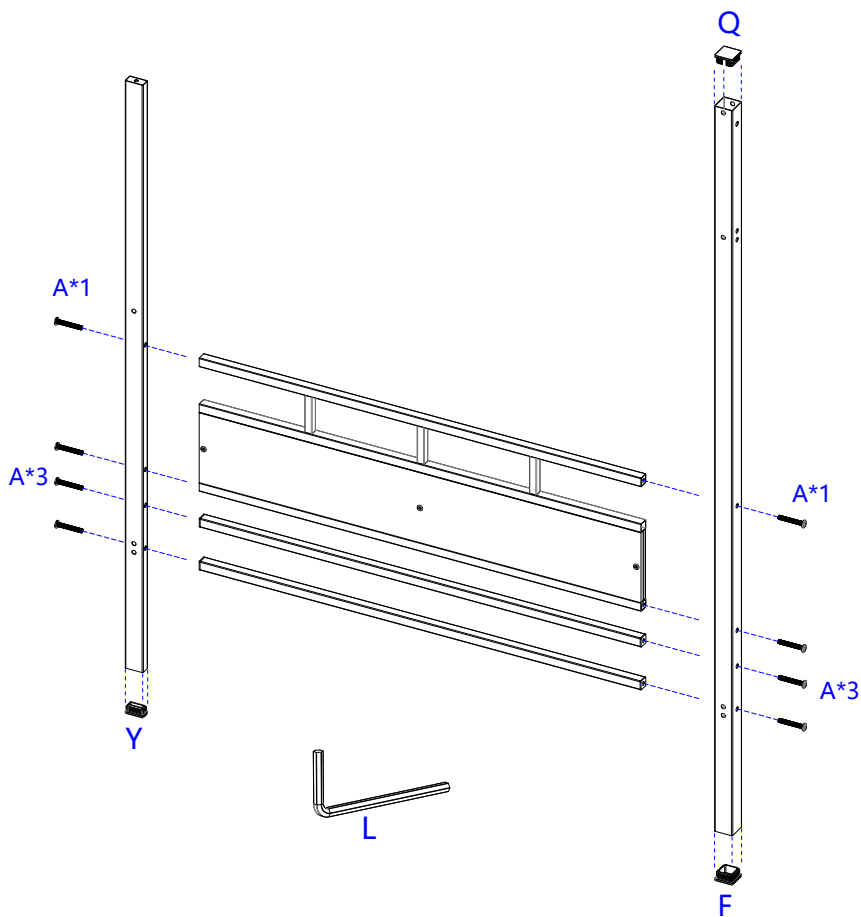
6-2pcs	1-4pcs	40*40F-4pcs	40*40FQ-4pcs	M8*55-4pcs



Step 2: Use hardware E, G, M to connect #12 and #32 together. Get 2 12# components



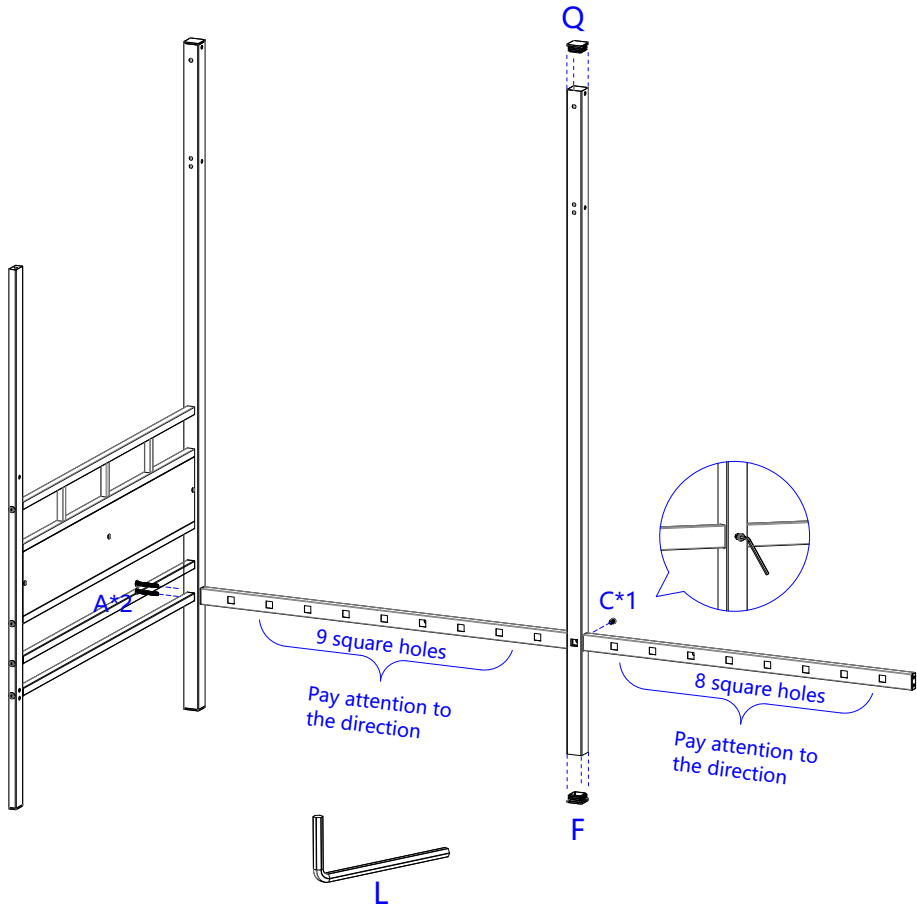
12-2pcs	32-2pcs	M6*15-6pcs	ΦM6*10-6pcs	M



Step 3: Use hardware A,Q, Y, F, L to connect #4,#11,#5 and #12 components together.



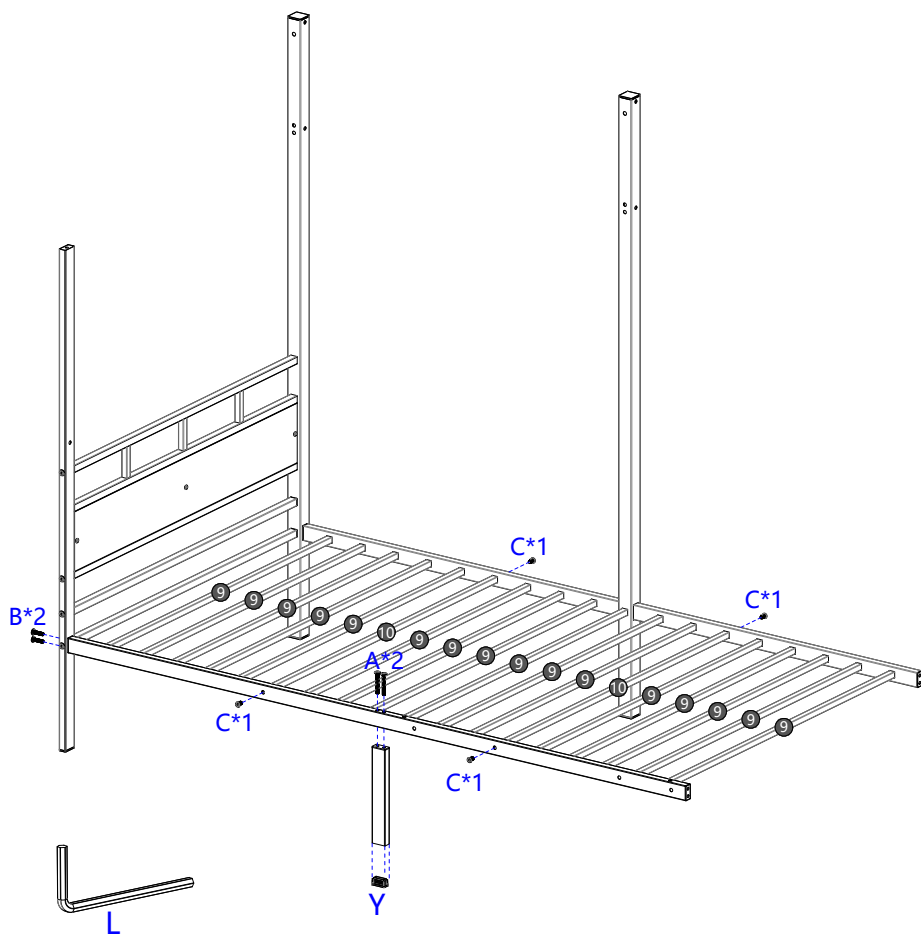
 4-1pcs	 11-1pcs	 1pcs 12# components	 40*40F-1pcs	 20*40-1pcs
		 5-2pcs	 40*40FQ-1pcs	 A M8*55-8pcs




Step 4: Use hardware A,Q, C, F, L to connect #3, and #7 together. Pay attention to the installation direction of hole #7




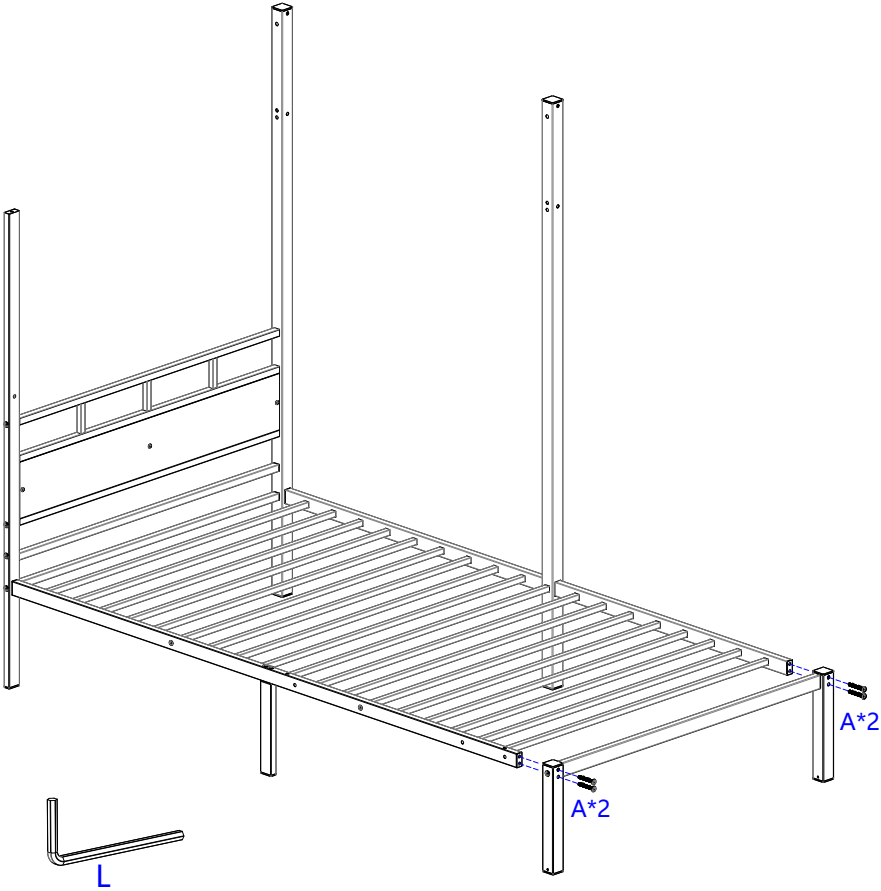
 3-1pcs		 7-1pcs	 40*40F-1pcs	 M8*55-2pcs
			 40*40FQ-1pcs	 M8*15-1pcs

Step 5: Use hardware A, B,C,Y, L to connect #2, #8, #9 and #10 together.



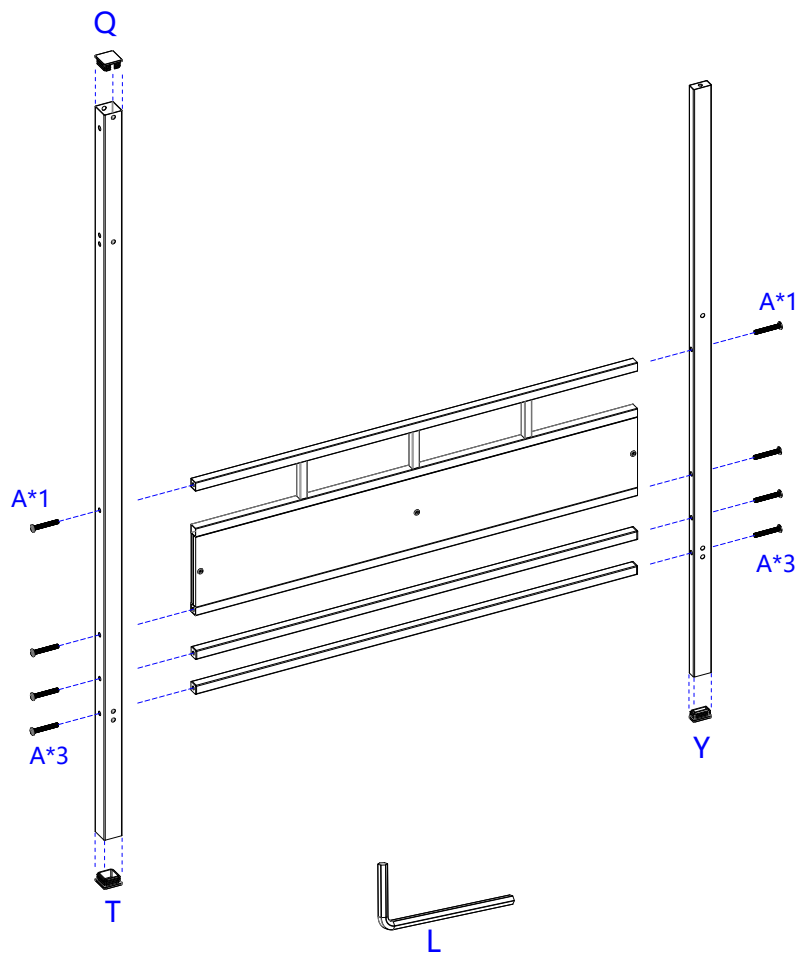
 2-1pcs	 9-16pcs	 8-1pcs	 20*40-1pcs	 A M8*55-2pcs
	 10-2pcs		 B M8*30-2pcs	 C M8*15-4pcs



Step 6: Use hardware A, L to connect1# components together.



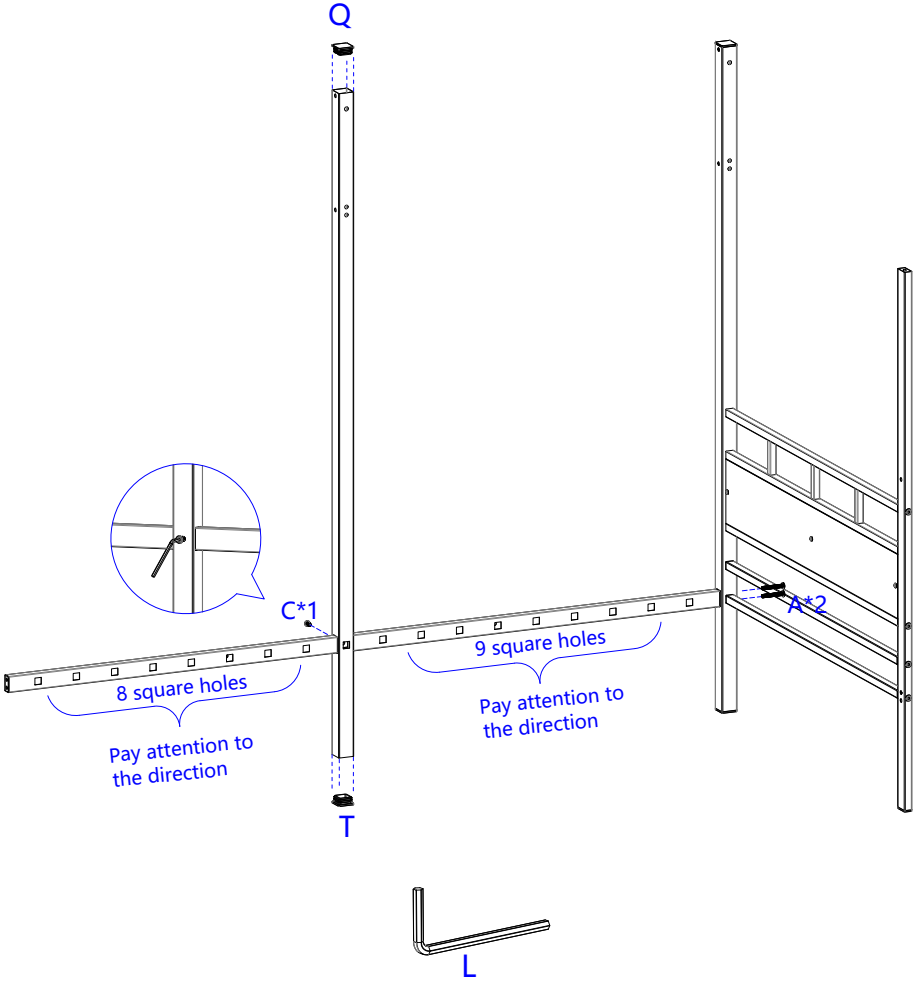
A
M8*55-4pcs



Step 7: Use hardware A,Q, Y ,T, L to connect #4,#11,#5 and #12 components together.



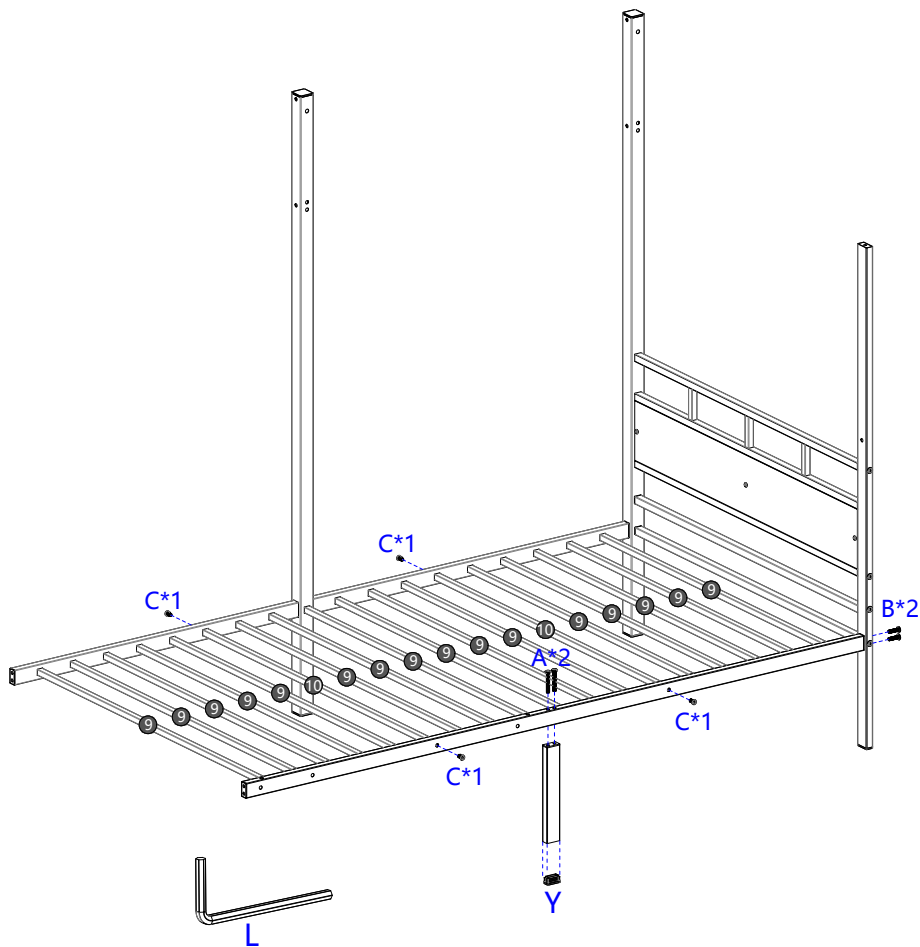
 4-1pcs	 11-1pcs	 1pcs 12# components	 40*40F-1pcs	 20*40-1pcs
		 5-2pcs	 40*40FQ-1pcs	 M8*55-8pcs




Step 8: Use hardware A,Q, C, T, L to connect #3, and #7 together. Pay attention to the installation direction of hole #7




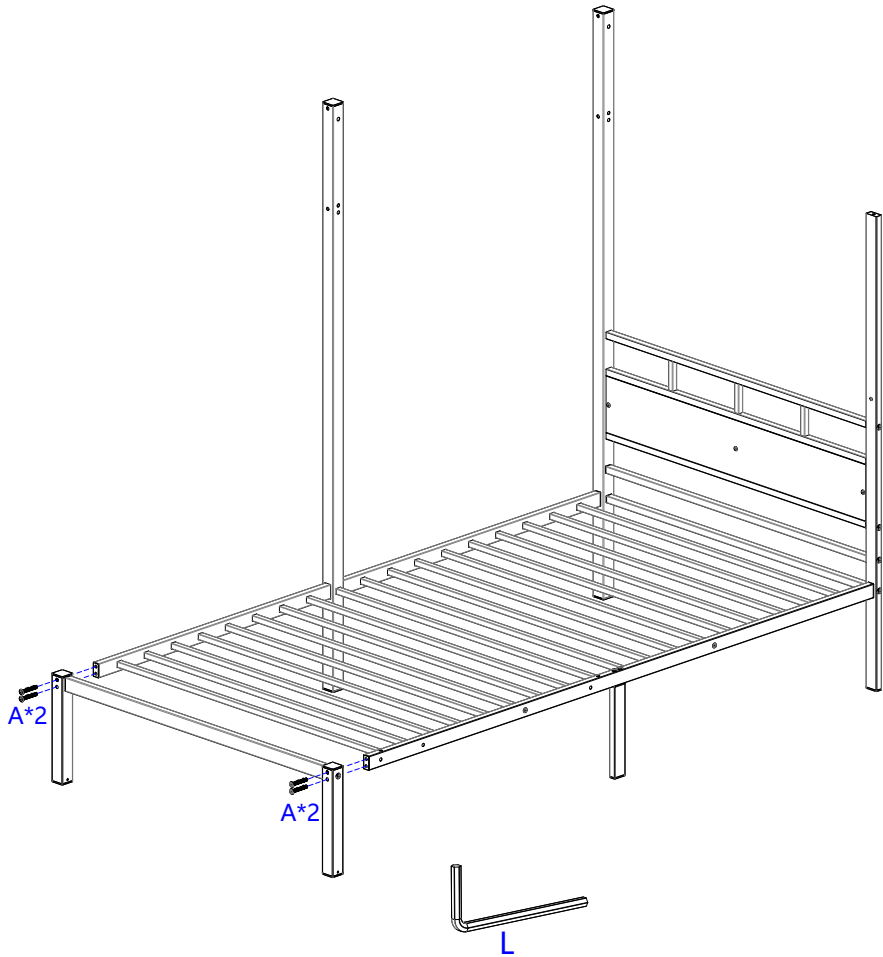
	 3-1pcs	 7-1pcs	 40*40F-1pcs	 A M8*55-2pcs
			 40*40FQ-1pcs	 C M8*15-1pcs

Step 9: Use hardware A, B,C,Y, L to connect #2, #8, #9 and #10 together.



 2-1pcs	 9-16pcs  10-2pcs	 8-1pcs	 20*40-1pcs  B M8*30-2pcs	 A M8*55-2pcs  C M8*15-4pcs
--	--	---	---	--

Step 10: Use hardware A, L to connect1# components together.



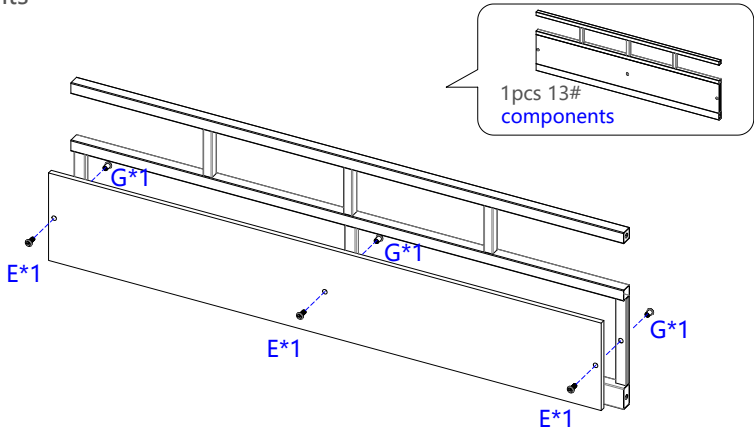
1# components






A

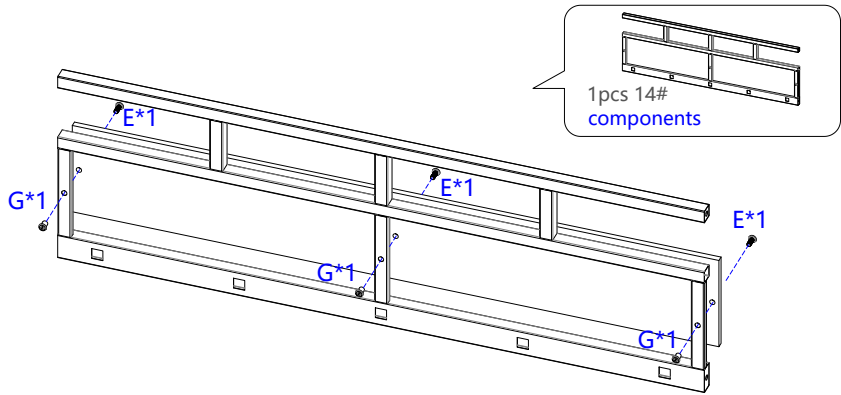
M8*55-4pcs



Step 11: Use hardware E, G, M to connect #13 and #32 together. Get 1 13# components



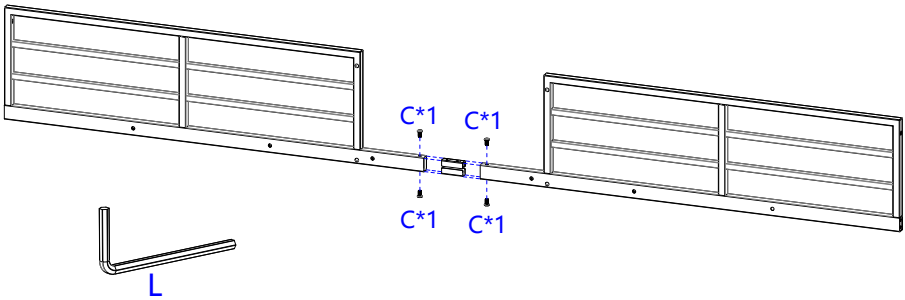
	 38.58*5.91"	 E M6*15-3pcs	 G ΦM6*10-3pcs	 M
13-1pcs	33-1pcs			




Step 12: Use hardware E, G, M to connect #14 and #32 together. Get 1 14# components



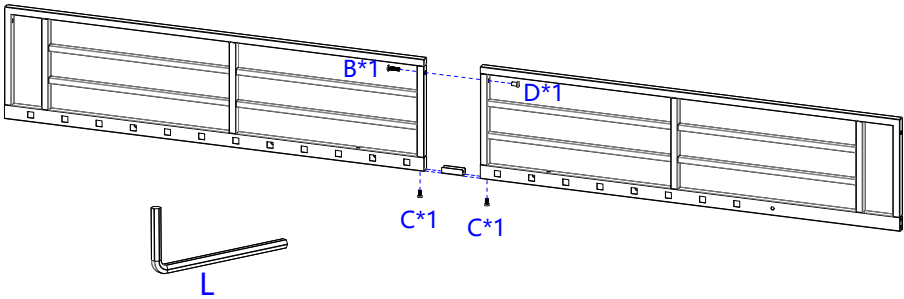
	 38.58*5.91"	 E M6*15-3pcs	 G ΦM6*10-3pcs	 M
14-1pcs	33-1pcs			




Step 13: Use hardware C,H , L to connect #15 and #16 together.



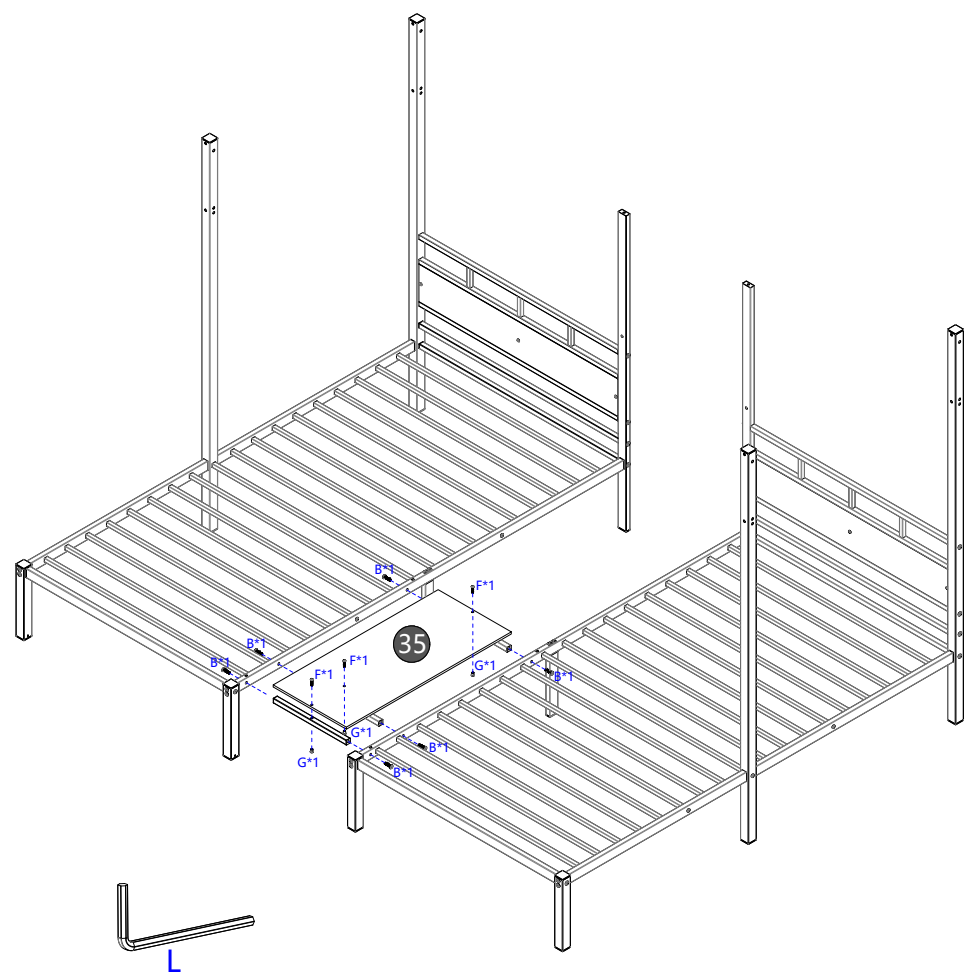
 15-1pcs	 16-1pcs	 H 18*60 -2pcs	 C M8*15-4pcs
---	--	---	---

Step 14: Use hardware B, C, D, H , L to connect #17 and #18 together.



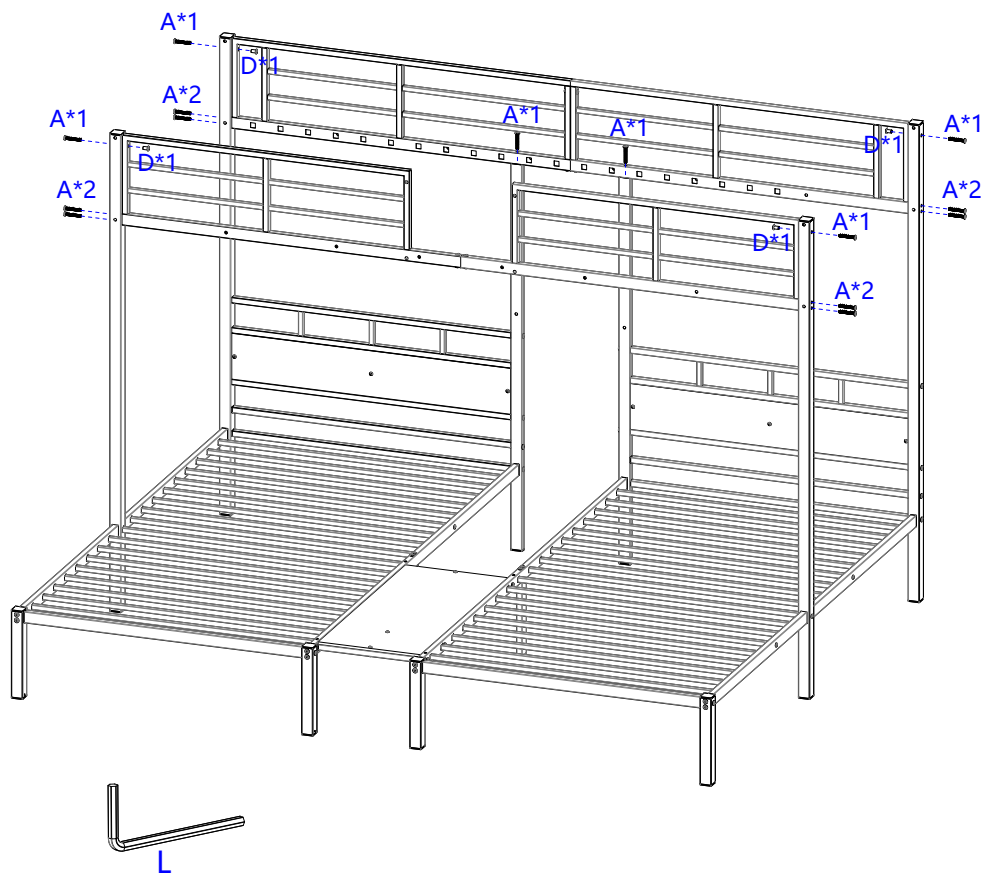
 17-1pcs	 18-1pcs	 H 18*60 -1pcs	 B M8*30-1pcs	 D ΦM8*16-1pcs	 C M8*15-2pcs
---	--	---	--	---	---



Step 15: Use hardware B, F, M , L , G to connect #35 and #22 together.





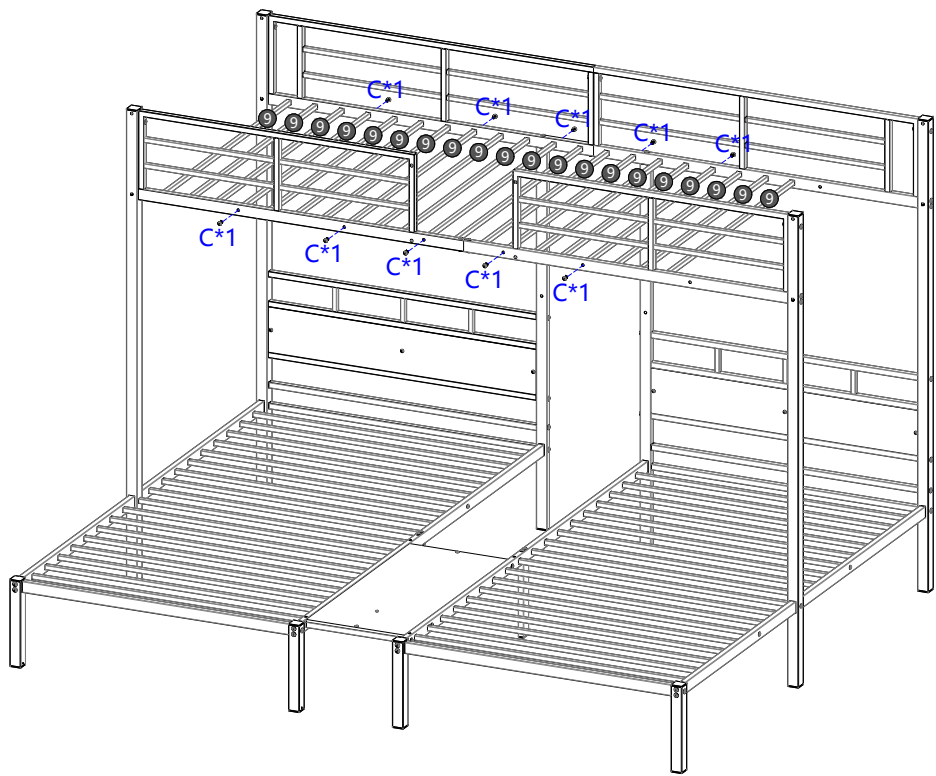
35-1pcs	22-3pcs	B M8*30-6pcs	F M6*25-3pcs	G ΦM6*10-3pcs	M

Step 16: Use hardware A, D and L to connect the previously assembled shelves #15, #16, #17 and #18




		 A M8*55-14pcs	 D ΦM8*16-4pcs
--	---	---	--

Step 17: Insert #9 and #10 into the corresponding hole in order, and use hardware C and L to tighten the screws while inserting to prevent them from falling off.



9-15pcs



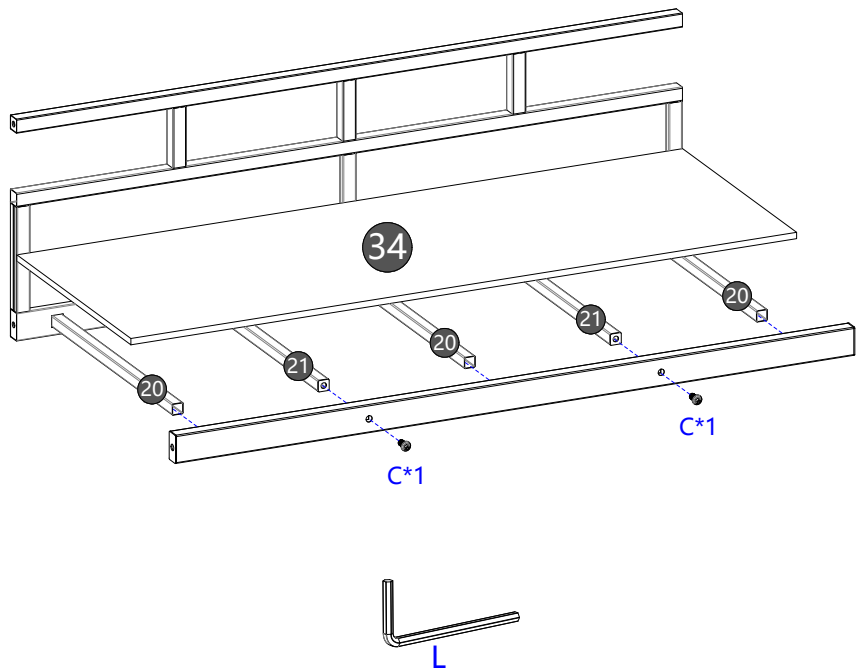
10-5pcs








C

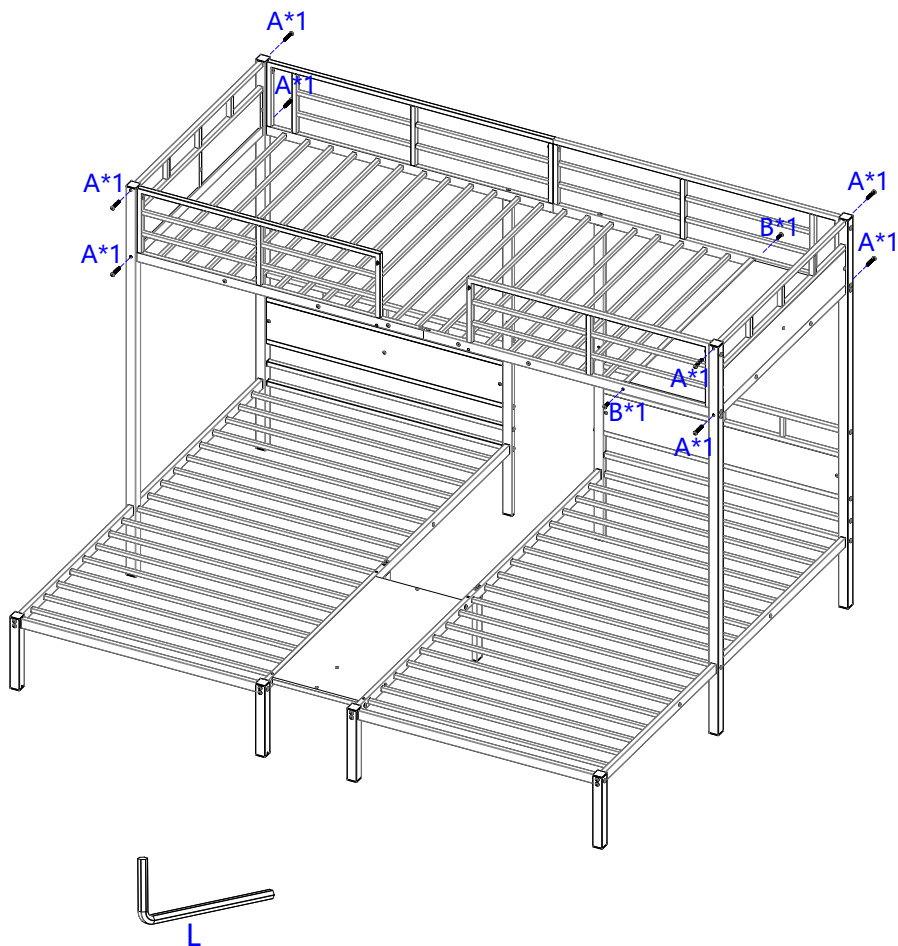
M8*15-10pcs



Step 18: Use hardware L , C to connect #34,#19,#20,#21 and #14components together.



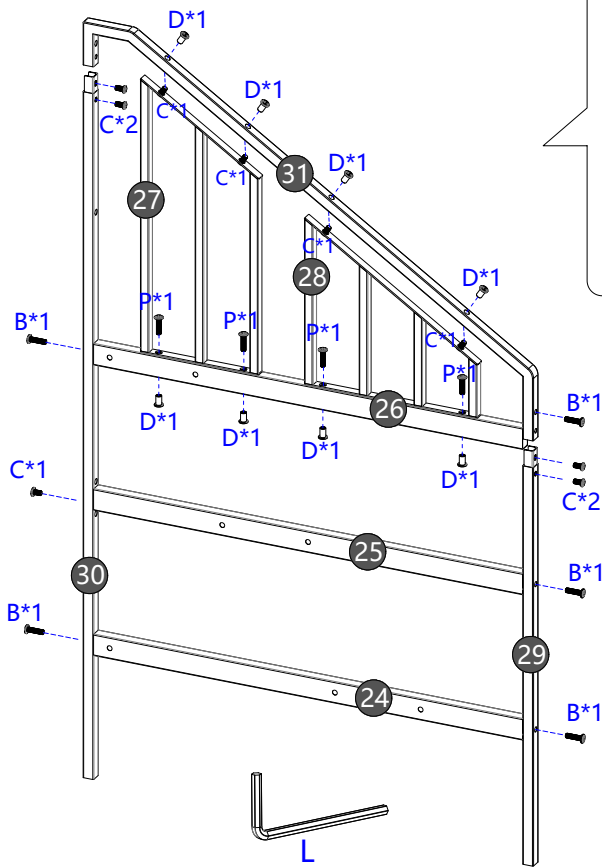
 1pcs 14# components	 38.58*14.17" 34-1pcs	 19-1pcs
 20-3pcs	 21-2pcs	 C M8*15-4pcs

Step 19: Use hardware A, B and L to connect step 18 components with #13 components.



	 1pcs 13# components	 A M8*55-8pcs	 B M8*30-2pcs
--	--	--	---

Step 20: Use hardware B, C, D, H, P, L to connect #24
#25#26#27#28#29and #30 together. Get 2pcs Stair bracket



2pcs Stair bracket




P

M8*35-8pcs




24-2pcs




25-2pcs



31-2pcs



27-2pcs




28-2pcs




D


ΦM8*16-16pcs



26-2pcs



29-2pcs



30-2pcs



H

18*60 -4pcs



B

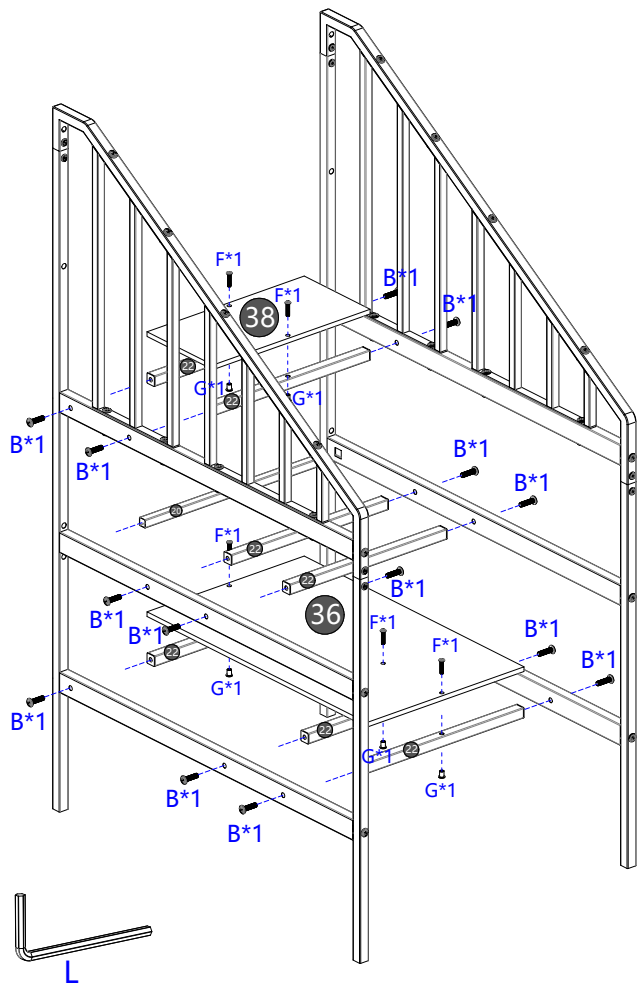
M8*30-10pcs








C

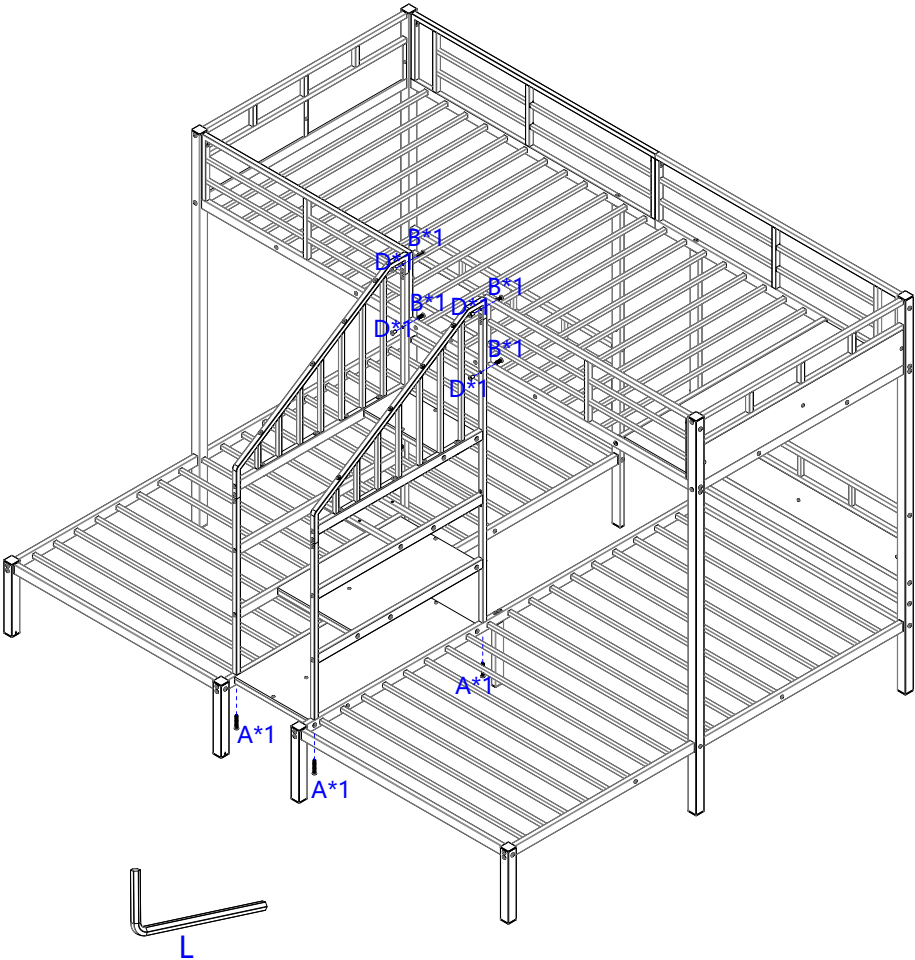
M8*15-18pcs


Step 21: Use hardware F, B, M, G, L to connect #36 #38#20#22and 2pcs Stair bracket together.Get 1pcs Stair components



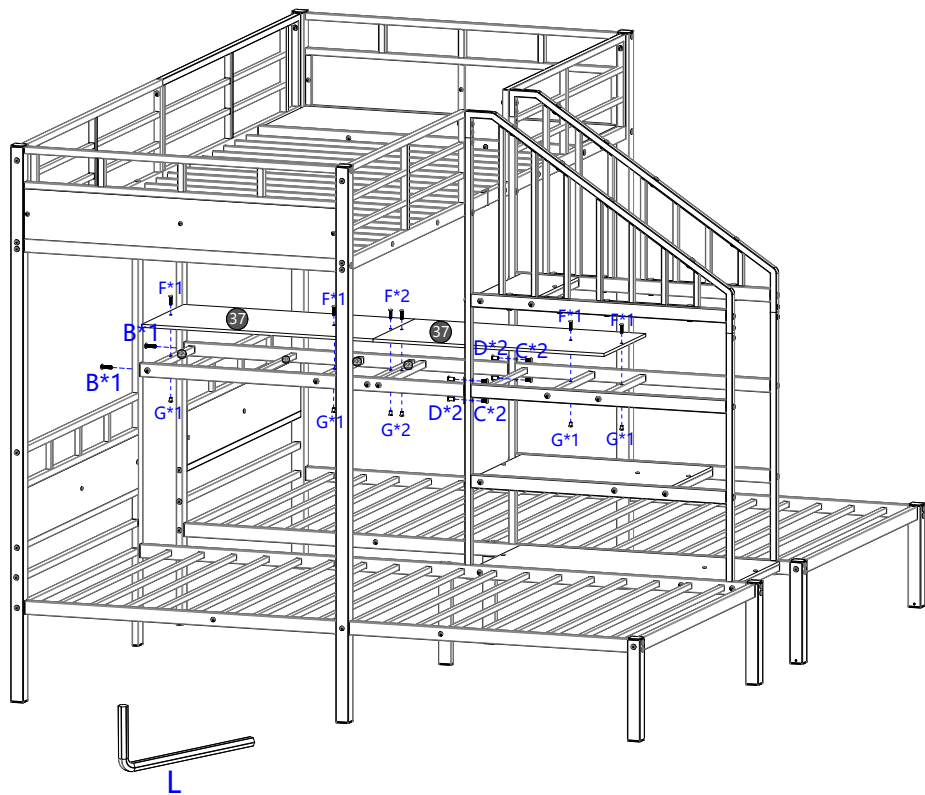
 2pcs Stair bracket	 23.62*14.17" 36-1pcs	 20-1pcs	 B M8*30-14pcs	 M
	 7.09*14.17" 38-1pcs	 22-7pcs	 F M6*25-5pcs	 G ΦM6*10-5pcs





Step 22: Use hardware A, B, D, L to connect The stair components are combined with the bed connection.

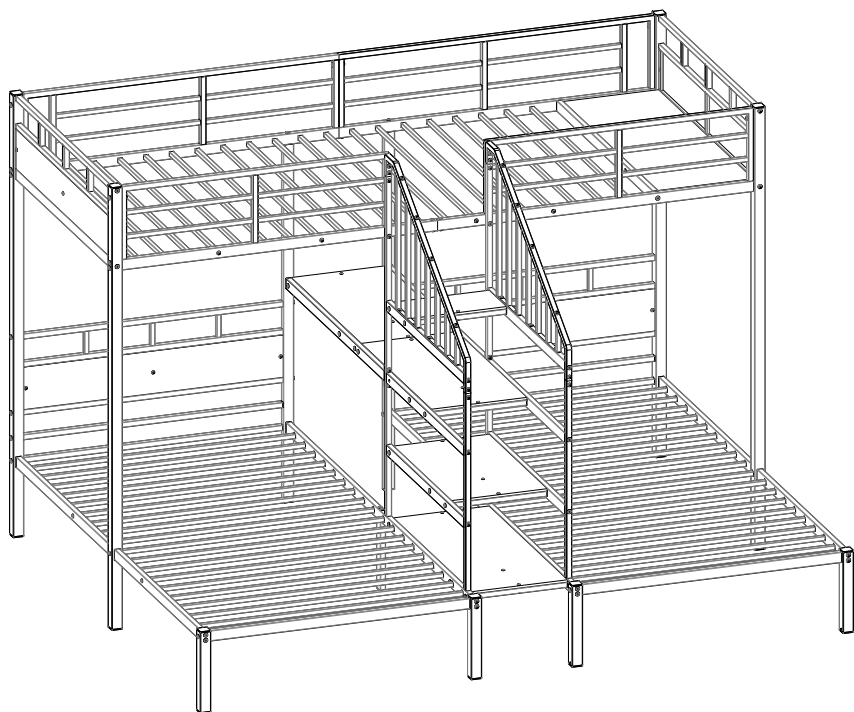


		 A M8*55-4pcs	 B M8*30-4pcs	 D ΦM8*16-4pcs
--	---	---	---	---

Step 23: Use hardware B,C,D,F,G,M, L to connect #23, #37, #20 and #22 together.

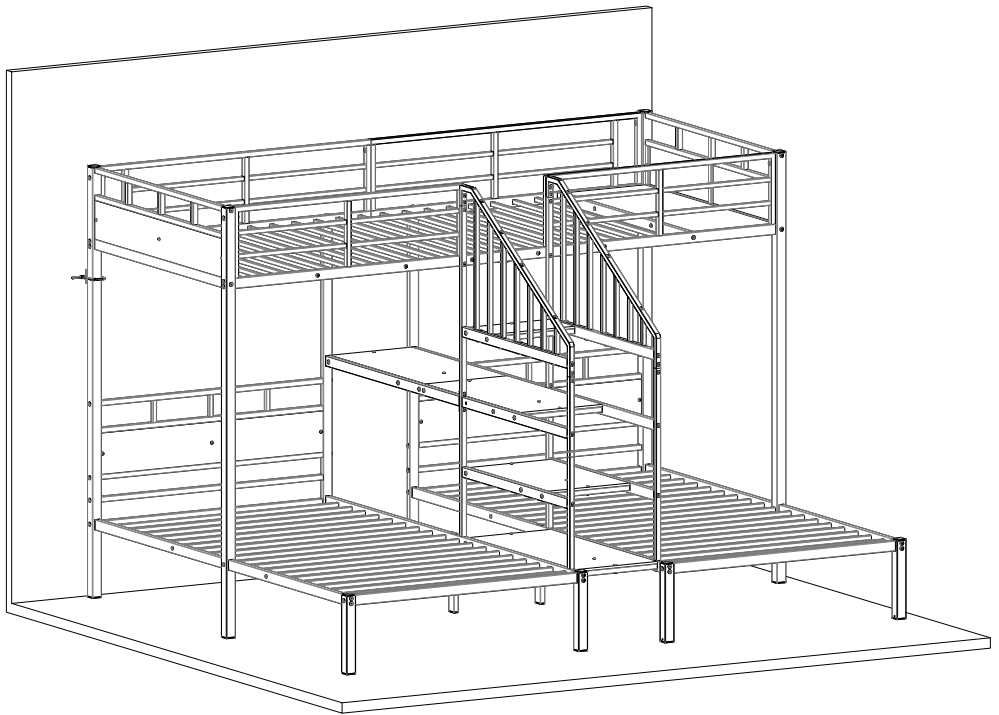
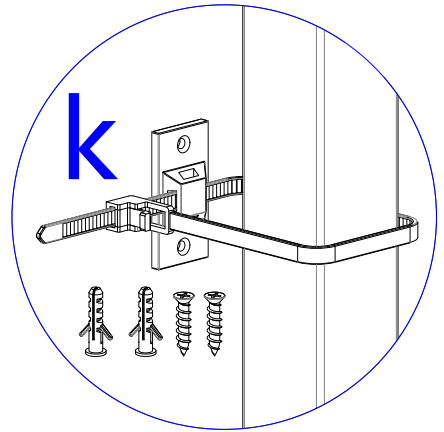



 23-2pcs	 20-1pcs	 C M8*15-4pcs	 D ΦM8*16-4pcs	 M
 37-2pcs	 22-4pcs	 B M8*30-10pcs	 F M6*25-6pcs	 G ΦM6*10-6pcs



Note: Tighten all the steps before use, thank you.

Fix the wall, prevent movement,
selective installation





Recyclable garbage