

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

ASSEMBLING THE FIXTURE (Fig.2)

1. Attach the loop (A) to the column (B) by turning it clockwise until tight. Attach the column (B) to the fixture body (F) by turning it clockwise until tight.
2. Attach the rod (H) to the fixture body (F) by turning it anticlockwise until tight. Attach the column (I) to the rod (H) , aligning the hole with pipe nipple and screw it with nut (J).

HANGING THE FIXTURE (Fig.1 Please see the Page.2)

IMPORTANT: For a safe and secure installation, this fixture must be installed by means of support that is independent of the junction box.

3. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old crossbar.
4. Provide a 1/4" IPS pipe with one end securely mounted to a beam or a structural member. The other end should protrude through the center of the outlet box as shown. **The junction box is not included.**
5. Assemble the ceiling loop (product shall prevail), nipple, nuts and hickey to center 1/4"IPS support pipe and adjust overall length to allow the lock collar to hold the canopy flush to the ceiling. When the adjustments have been completed, secure the three (3) nuts, as shown.
6. Attach the chain to the fixture loop. Slip the lock collar and canopy over the upper end of the chain. Open the end link of the chain and lift the fixture to attach to the ceiling loop and secure the link.
7. Lace the fixture wires, ground wire and safety cable through the chain and loop, exiting through the side of hickey. Run the safety cable through the top of the outlet box and secure to structural member.
8. **IMPORTANT: you must, run the safety cable through the two clamp bolts, then through the top of the junction box and secure to structural member. NOW, fasten the end of safety cable through the two clamp bolts (see fig.1), lock them securely with the four small hex nuts until tight.**

CONNECTING THE WIRES (Fig.3)

9. At this point, connect the electrical wires as shown in Fig.3 making sure all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise connect fixture's ground wire directly to the junction box.
10. Tuck these wire connections neatly into the ceiling junction box.
11. Raise the lock collar and thread onto ceiling loop protruding through canopy.

COMPLETING THE INSTALLATION (Fig.2)

12. Hook the end of long crystals (O) to the bottom loop of the column (B) and the top hole of the column (E).
13. Hook the end of crystals (N) to the bottom hole of the column (E) and the top hole of the column (G).
14. Hook the end of short crystals (M) to the bottom hole of the column (G) and the top hole of the column (I).
15. Hang the crystals (P) to the top hole of the column (B). Hang the crystals (K) to the bottom hole of the column (I). Hang the crystals (L) to the middle hole of the column (I).
16. Place the crystal cup (C) and the tube (D) over the socket of the fixture body (F).
17. Install the light bulbs (not included) in accordance with the fixture's specifications: **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.2



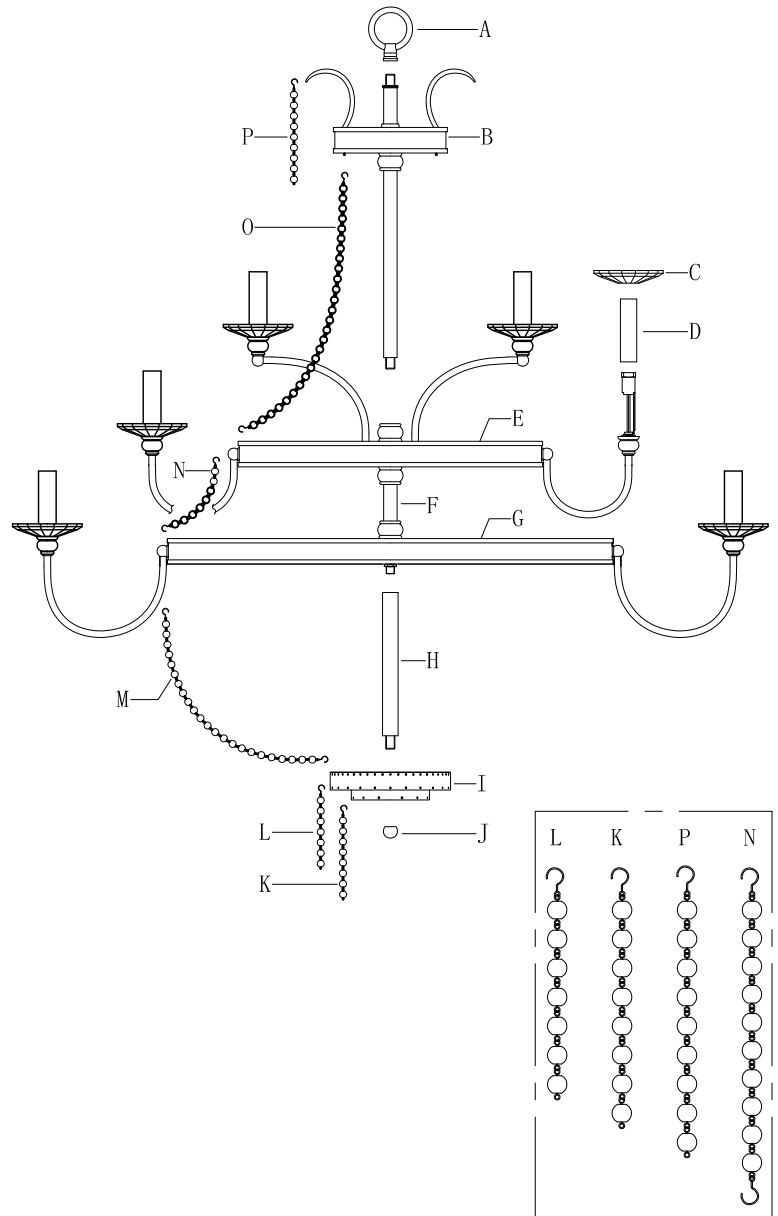


Fig.3

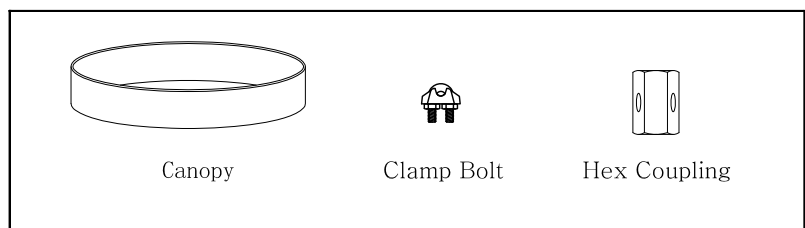

ASSEMBLING & INSTALLATION INSTRUCTIONS FOR HEAVY MOUNTING FIXTURE

Fig.1

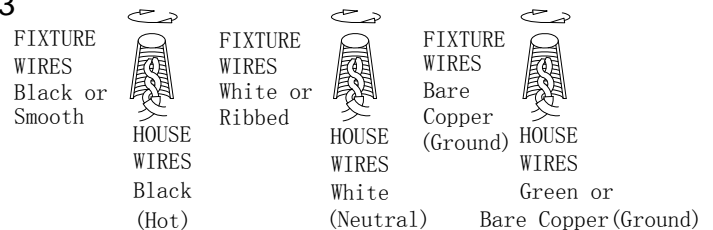