Assembly Instruction

CAUTION: Read instruction carefully and turn electicity off at main circuit breaker panel before

beginning installation.

Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water,never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuitbreaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry softcloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
Α	Mounting bar	4	1X	G	Finial	a	1X
A1	Mounting screw	шш	2X	Н	Screw pitch		2X
В	Backplate		1X	I	Flat washer	0	2X
С	Backplate screw		2X	J	Bolt		1X
D	Nipple		1X	K	Shade		1X
E	Pillar		1X	L	Bulb		1X
F	Finial	\Box	1X	М	Wire nut		3X

Installation

Step 1


Unpack all parts from cartons carefully

Fixting nipple(D) to the pillar(B) and screw with finial(F)

Fixting finial(G) to the shade(K) and screw with bolt(J)

Fixting shade(K) to the backplate(B) and screw^A with screw pitch(I)

Place bulb(L) to the socket

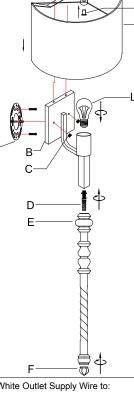

Step 2 Wire connection

	'		
Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:		
Black	White		
* Parallel Cord(round & smooth)	* Parallel Cord(square& ridged)		
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brown,Gold or Black without Tracer(colored stripes)		
Insulated Wire(not green) with copper metal conductor	Insulated Wire(not green) with Silver metal conductor		



*Note: When parallel wire(SPTI & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See illustration on left.)




Step 3

Installing the mounting bar(A) with mounting screw(A1), and secure Backplate (B) with Backplate screw(C)



Consult a qualified electrician to ensure correct branch circuit conductor



ENJOY YOUR LAMP