


ASSEMBLY INSTRUCTIONS


PARTS AND HARDWARE

Have the item assembled located where it will later be used. Make sure no sharp objects such as screws are scattered beneath the assembly area. Lay all parts ready to be used and make sure that all parts are there. It is important to follow every instruction in order to assemble this product in the most efficient way .


A : CHAISE 1 PC

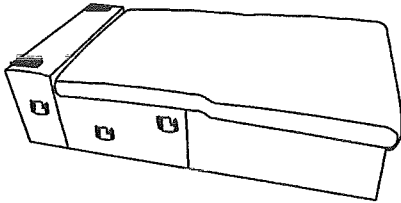


B : LOVESEAT 1 PC

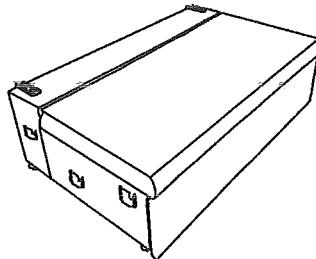


C : BACKREST 2 PCS

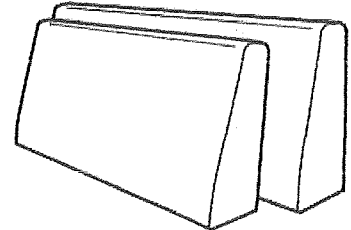


D : ARM 2 PCS

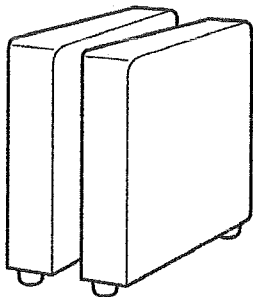


E : PILLOW 2 PCS

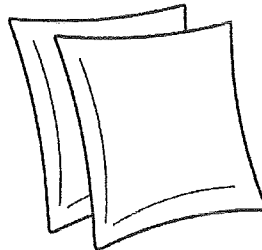


F : BACK CUSHION 3 PCS

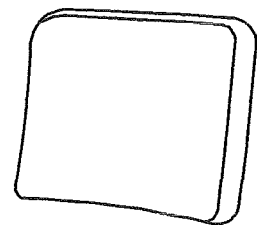




G : LEG 4 PCS



H : SCREW 4 PCS



I : SPANNER 1 PC

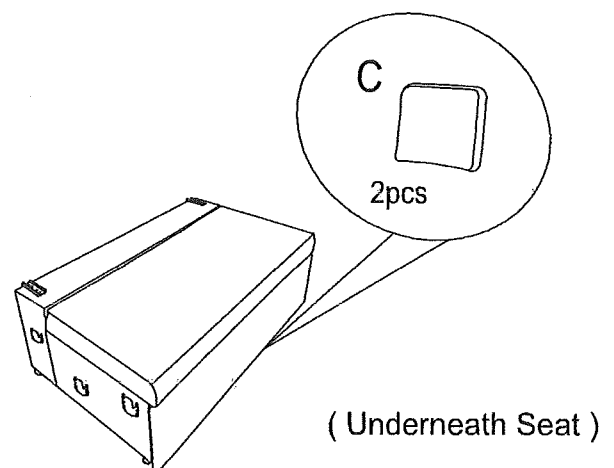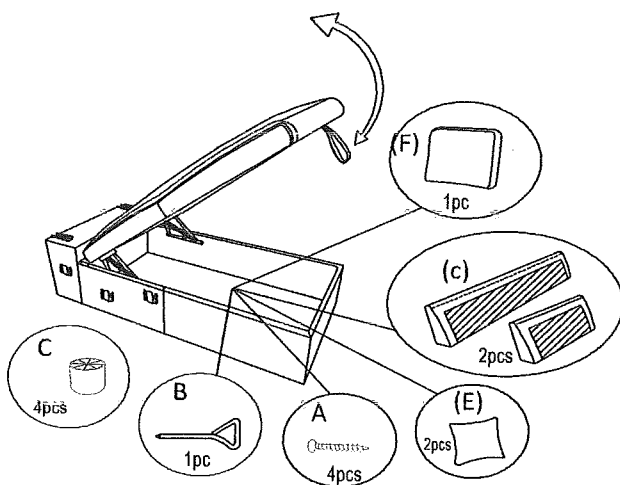


All parts will be found in the storage compartment in the chaise , except two back cushions which will be found under the seat of the loveseat , you may have to turn it upside down to get the two pillows.

TO HAVE THE CHAISE ON THE RIGHT SIDE FOLLOW THIS PAGE


Step 1.

Once all parts are taken out of the storage compartment and under the sofa (two pillows), have the chaise upside down and make sure there are no sharp objects underneath. Screw on the legs onto the chaise by locating the white marks underneath showing where the legs should be.

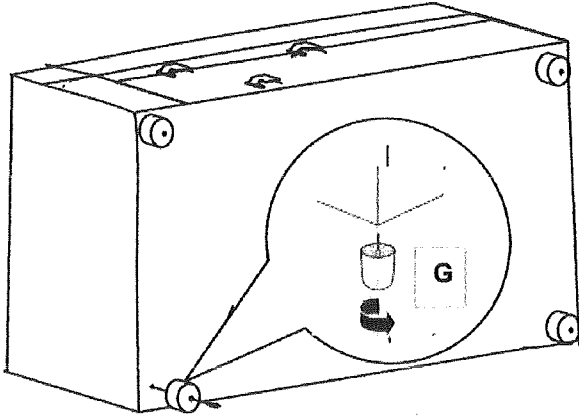


Step 2.

Place one arm assembling it on the right side, the chaise will have to be lifted up and aligned with all the slots in with the arm as shown in the photo.

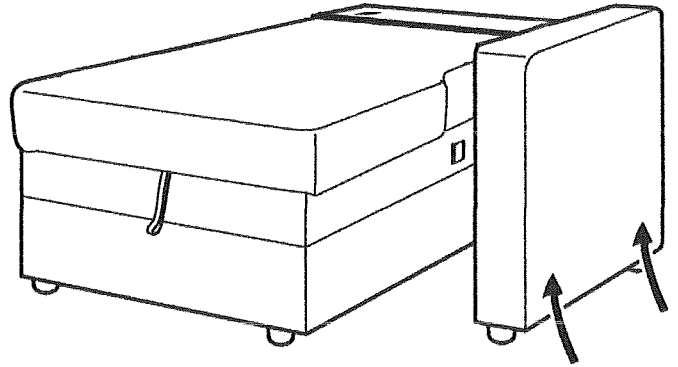


Step 3.

Have the Chaise on the right side and align the metal slots in front of each other, then lift the chaise up for the metal slots to go onto the ones on the love.

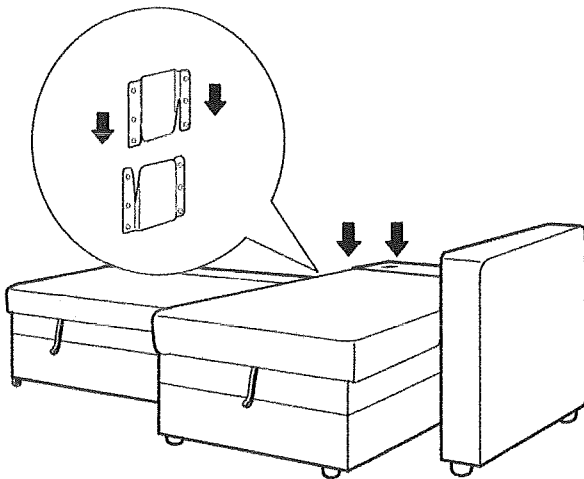



Step 4.

The backrests have metal slots on the bottom that will align the holes that can be found on the back. Once aligned slot in the back piece until it is in all the way.

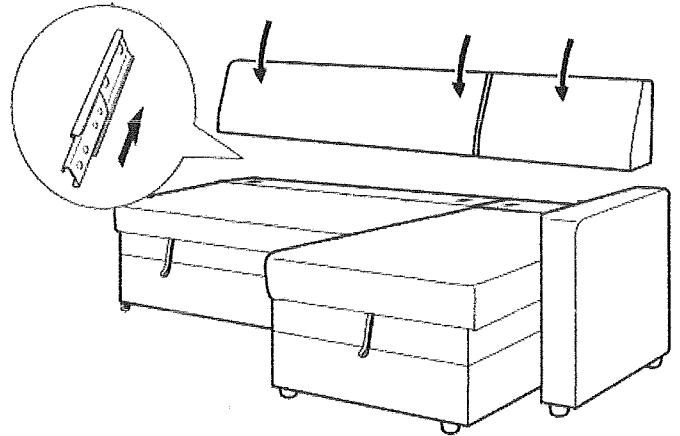

Step 5.


Place the remaining arm and then attach the back pillows to the back rest. Once completed your sofa is now ready to be used. To pull out the bed component, carefully pull out the bottom part from the love side and the cushion will come up, to put it down, lift up the handles at a 45 degree angle and drop it in gently.

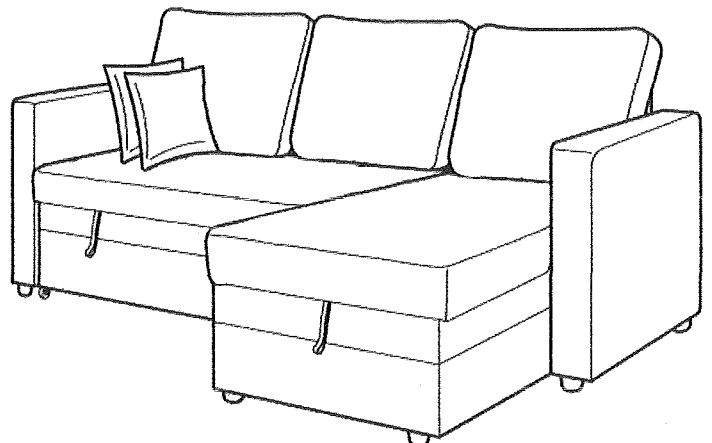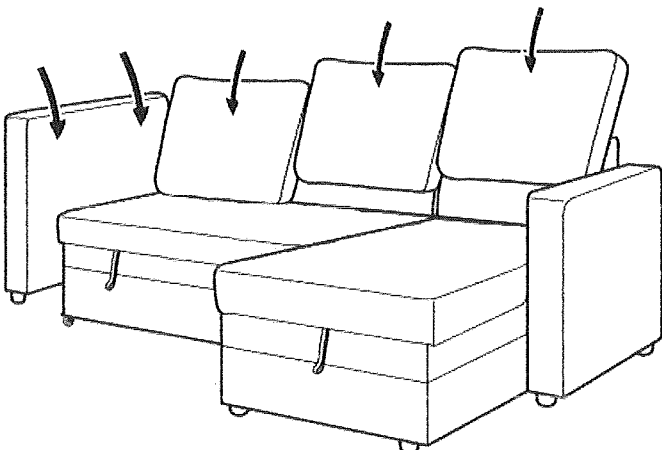

TO HAVE THE CHAISE ON THE LEFT SIDE FOLLOW THIS PAGE


Step 1.

Once all parts are taken out of the storage compartment and under the sofa (two pillows), have the chaise upside down and make sure there are no sharp objects underneath. Screw on the legs onto the chaise by locating the white marks underneath showing where the legs should be.

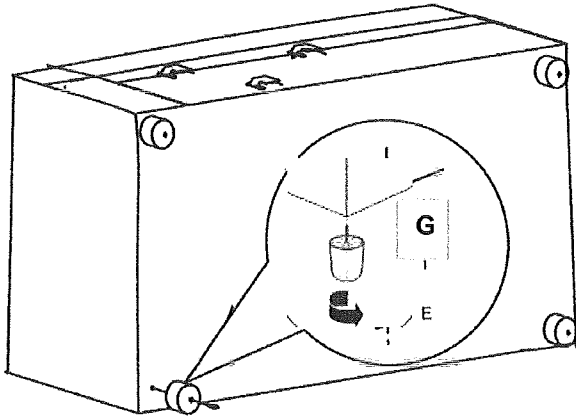


Step 2.

Place one arm assembling it on the left side, the chaise will have to be lifted up and aligned with all the slots in with the arm as shown in the photo.

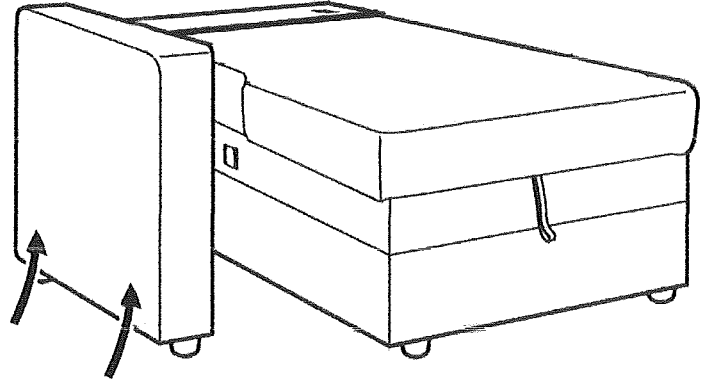


Step 3.

Have the Chaise on the left side and align the metal slots in front of each other, then lift the chaise up for the metal slots to go onto the ones on the love.

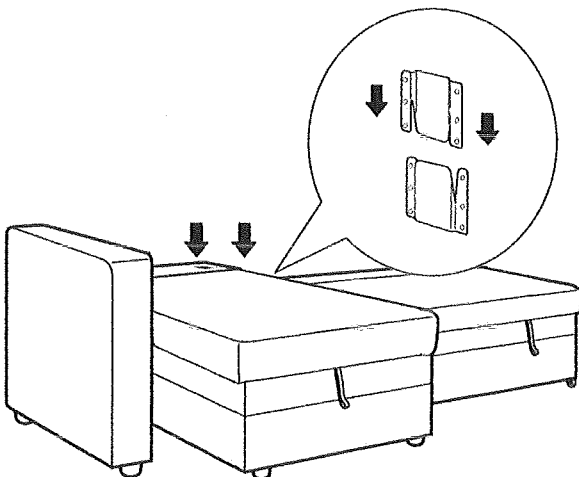

Step 4.

The backrests have metal slots on the bottom that will align the holes that can be found on the back. Once aligned slot in the back piece until it is in all the way.

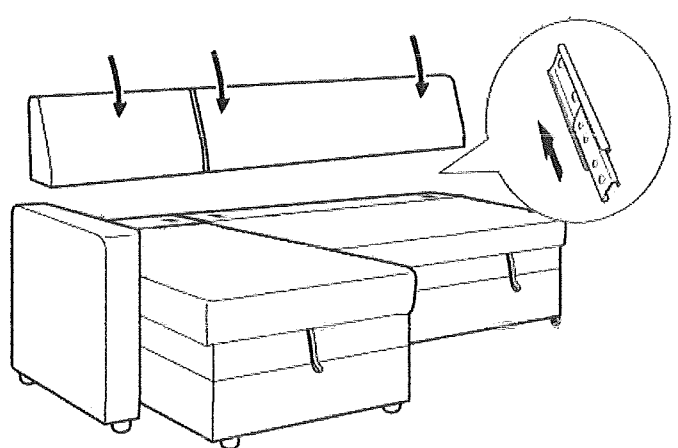

Step 5.

Place the remaining arm and then attach the back pillows to the back rest. Once completed your sofa is now ready to be used. To pull out the bed component, carefully pull out the bottom part from the love side and the cushion will come up, to put it down, lift up the handles at a 45 degree angle and drop it in gently.

