


3-HEAD PLASTIC SQUARE LED SOLAR GARDEN LIGHT


FIRST TIME USE

- Step1:** Rotate the bulb clockwise into the lamp holder, then rotate the light cover clockwise into the light head.
- Step2:** Locate the ON/OFF switch and ensure it is in the 'ON' position
- Step3:** Re-assemble light head by aligning the 4 locking tabs on the side
- Step4:** solar light needs to charge in full sunlight for 8-12 hours with switch in the "ON" position to allow the rechargeable batteries to reach maximum capacity.

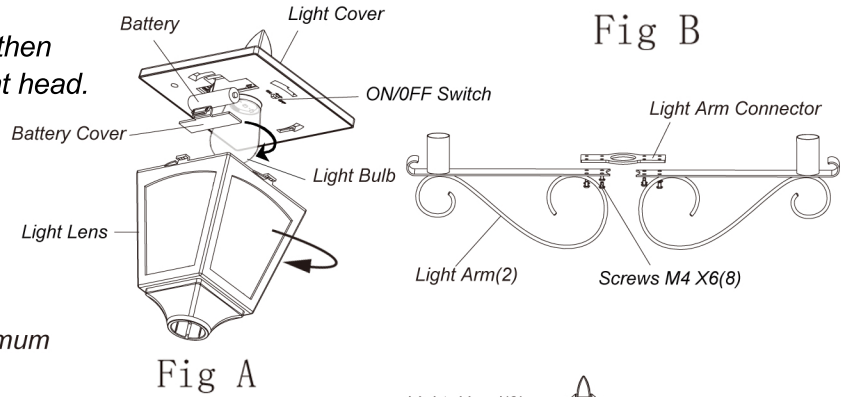

ASSEMBLY

- Step1:** Remove the 8 M4X6 screws pre-assembled from the Light Arm Connector by using a screwdriver. And then secure the Light Arm with the M4x6 screws that were just removed. Tighten all screws securely. Fig B
- Step2:** Insert the threaded section of Pole A into Pole B through the middle hole of the Light Arm Assembly. And then twist anti-clockwise until lock in place. Fig C
- Step3:** link another Pole B with the previous Pole B and tighten it, then link Pole C and Pole B, and tighten, Fig C
- Step4:** 1. Measure and mark the hole locations on the ground with a pencil according to the base
2. Drill holes for the screws and plastic anchors provided.
3. Insert the plastic anchors into the holes of ground. Be sure at least 2 inch of the plastic anchors is threaded into the ground.
4. Secure the base with the three Self-Tapping Screws and tighten all screws firmly. Fig C
- Step5:** insert the assembled light post assembly and plug it into the base, Fig C
- Step6:** insert three Light Head into Light Arm Assembly and Pole A, Fig C

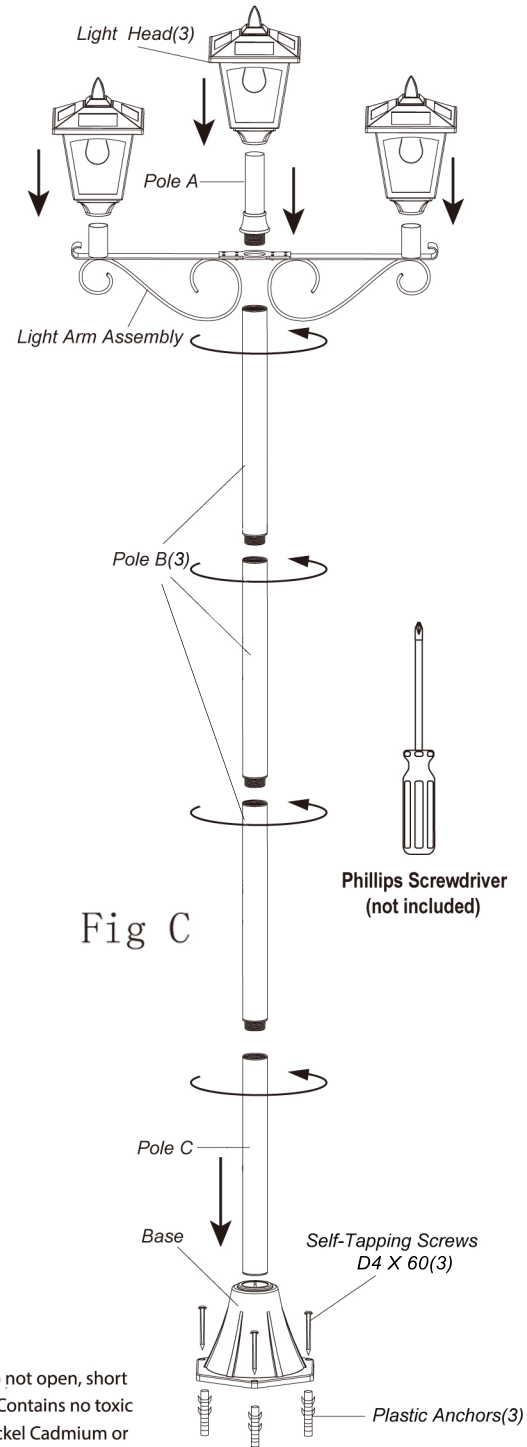

REPLACING THE BATTERY

- Step 1:** Detach light cover from the top of the lens section by twisting it in an anti-clockwise direction and gently lifting off
- Step 2:** remove battery cover, refer to Fig A.
- Step 3:** Remove the old battery and replace it with a new 3.2V 600mah AA Rechargeable Battery.
- Step 4:** Replace battery cover and re-install the light cover to the light lens.
- Step 5:** Slide the switch to the "ON" position. For optimum performance, allow solar light to charge in full sunlight.

TROUBLESHOOTING

If light doesn't turn on, remove battery, wipe both ends with a clean, dry cloth and reinstall battery. Check the battery to ensure that it is making secure contact with the terminals. If this doesn't work, replace with new battery.

WARNING: Do not dispose of Rechargeable batteries in municipal waste stream or by fire as batteries may explode. Do not open, short circuit, or mutilate batteries. Dispose of batteries in accordance with Local, State, and Federal regulations. Contains no toxic metals. Do not mix old and new batteries. Do not mix alkaline, standard (Carbon-Zinc), or rechargeable (Nickel Cadmium or Nickel Metal Hydride) batteries.