

Installation Instructions


Item No.: IN-0501-6

Step 1: Create Cut Template

For your safety, turn off power before starting this project.


Note: Box is not Fan or Fixture weight rated. In addition, make sure that you check local codes for requirements.

Choose the desired box location. Place the back side of the box against the wall or ceiling. Using a pencil, trace the back side of the box on the surface to create cut template.

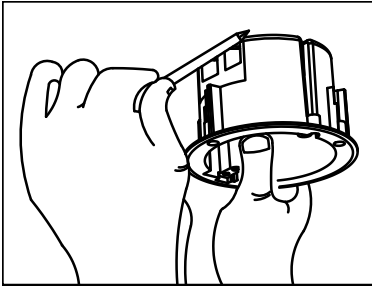


Step 2: Cut Mounting Hole

Using either a keyhole saw or a reciprocating saw, cut the hole to the necessary size. Make sure that the hole is the right size by pushing the box into it. The box should be Snug inside the hole. Adjust as required.

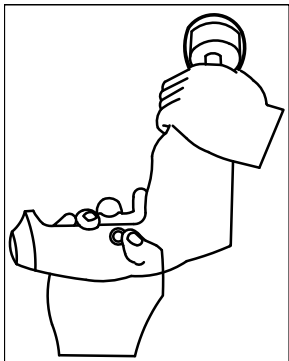

Step 3: Thread Cables


Run cable through the hole. Strip 8-12 inches of NM-B cable jacket and run the cable into the box. Whichever clamping method the box uses; 1/2-inch of NM-B cable jacket should show inside the box. Tug to make sure the cable clamps tightly.

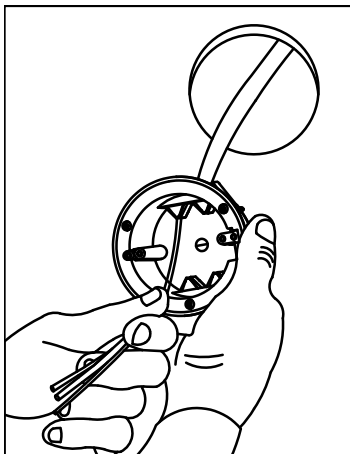

Step 4: Secure the Box


Fish the cable to the hole created to insert the box. Route the wire(s) through the cable entries on the back of the box.

Push the box through the hole until the back side of the box face is flush with the mounting surface. Tighten the screws until the screws tighten. Tighten screws until they are snug to secure the box. Don't over tighten the screws. Verify the box is secured.

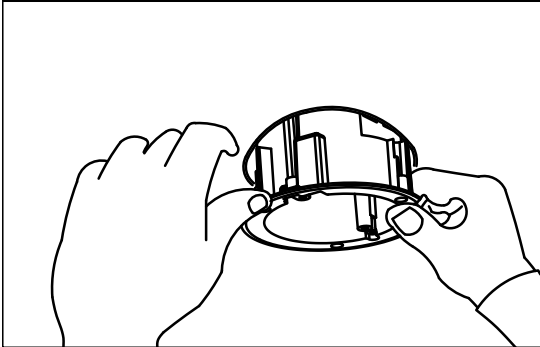

Step 5: Secure Box to Wall

This type of box has wings that extend outward when you start to drive the screw, then grasp the back of the drywall as the screw is tightened. Tighten the screws until you feel resistance and the box is firmly attached. Verify the box is secured.

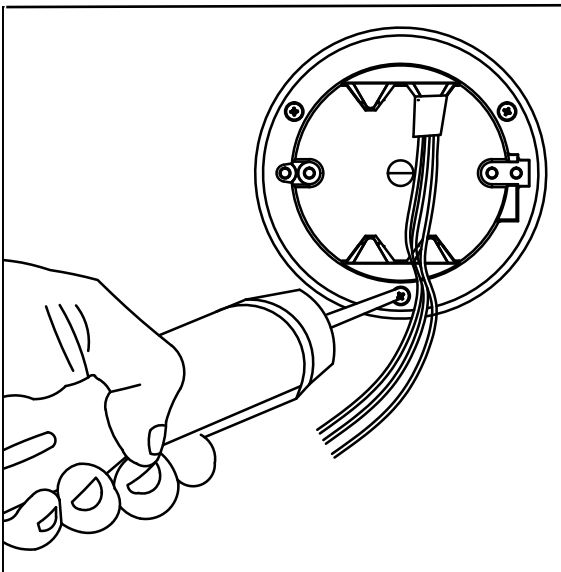

END