

Assembly Instructions


SG019 | 5-Tier Bookcase | 80 cm

5-Tier Bookcase - 80 cm



Assembly Overview

SG019 | 5-Tier Bookcase | 80 cm

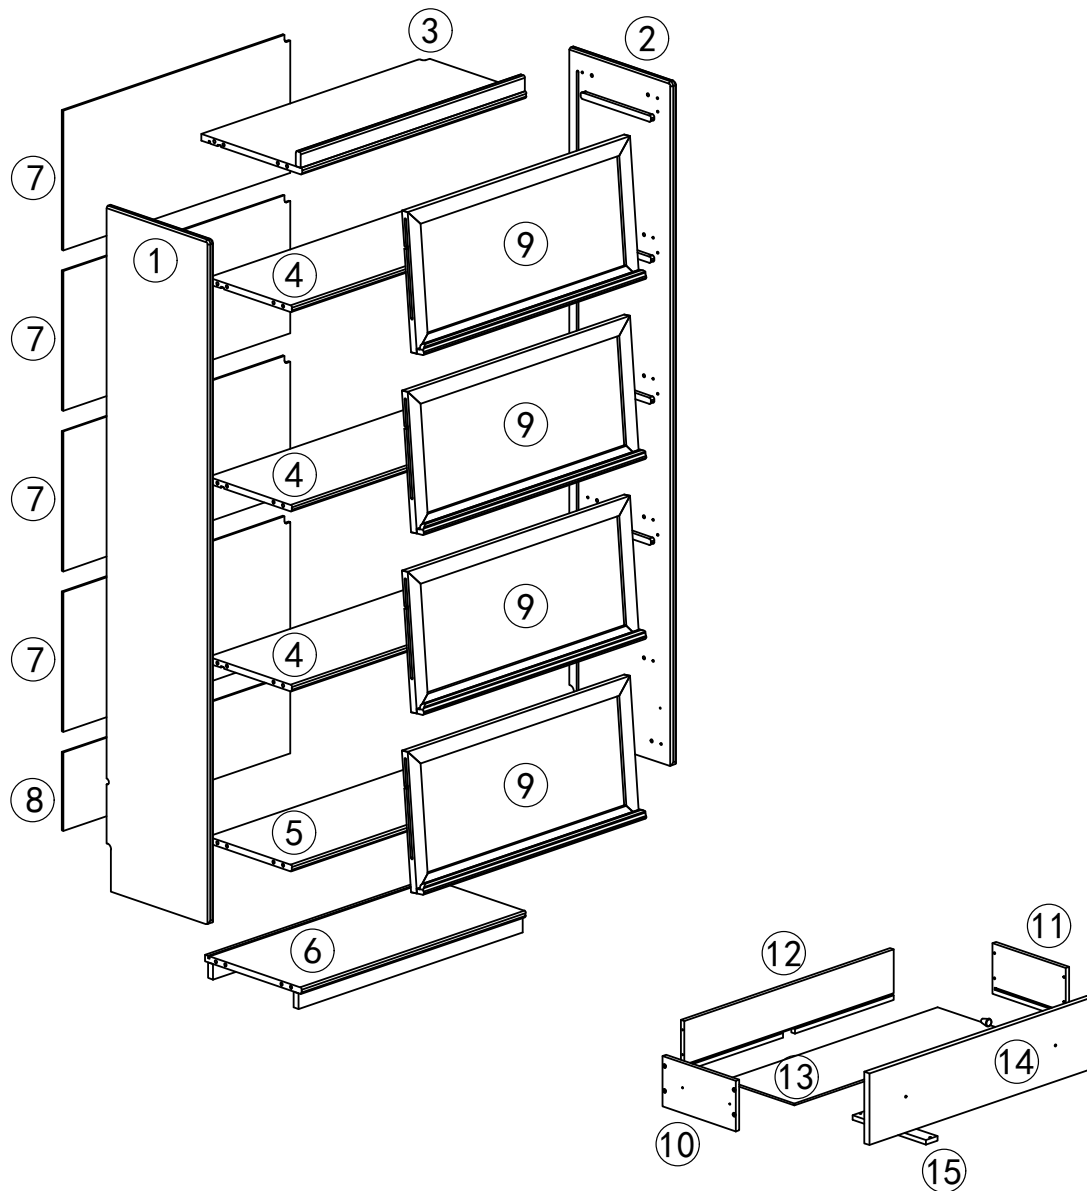


Parts List

SG019 | 5-Tier Bookcase | 80 cm

① Left side panel


1760 x 350 x 17 mm



1 pc

② Right side panel


1760 x 350 x 17 mm

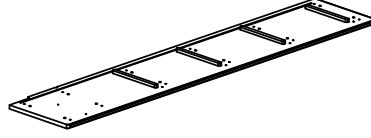

1 pc

③ Top panel assembly


766 x 345 x 57 mm



1 pc

④ Shelf panel

766 x 286 x 17 mm



3 pcs

⑤ Lower shelf panel


766 x 286 x 17 mm



1 pc

⑥ Bottom panel assembly


766 x 286 x 57 mm



1 pc

⑦ Large back panel


776 x 360 x 5 mm



4 pcs

⑧ Small back panel


776 x 202 x 5 mm



1 pc

⑨ Door frame assembly


760 x 358 x 45 mm



4 pcs

⑩ Drawer left side panel


250 x 130 x 12 mm



1 pc

⑪ Drawer right side panel


250 x 130 x 12 mm



1 pc

⑫ Drawer back panel


716 x 130 x 12 mm



1 pc

⑬ Drawer bottom panel


726 x 236 x 5 mm

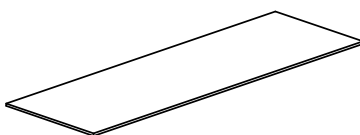

1 pc

⑭ Drawer front panel


760 x 184 x 29 mm



1 pc

⑮ Drawer reinforcing strip

250 x 40 x 20 mm



1 pc

Hardware and Tools

SG019 | 5-Tier Bookcase | 80 cm


A Cam lock

Diameter 15 mm
24 + 3 pcs




B Cam bolt

L = 35 mm
24 + 3 pcs



C Wooden dowel

Diameter 8 x 30 mm
24 + 3 pcs



D Cover sticker

Diameter 20 mm
24 + 3 pcs



E Back panel clip

13 x 13 x 9.5 mm
26 + 3 pcs




F Flat-head wood screw

Diameter 3 x 15 mm
38 + 4 pcs



G Tapered knob

Diameter 20 x 23 mm
2 pcs



H Phillips large flat-head screw

M4 x 25 mm
2 + 1 pcs



I Three-section drawer slide

L200 x 45 mm
1 pc



J Flat-head wood screw

Diameter 3.5 x 12 mm
12 + 2 pcs



K Door pivot pin

Diameter 5 x 25 mm
8 + 1 pcs



L Bumper pad

Diameter 8 x 3 mm
8 + 1 pcs



M Anti-tip hardware

2 sets




P Power plug

1 pc




N Nonwoven pad

Diameter 20 x 3 mm
4 + 1 pcs



Q Multi-function ratcheting screwdriver

M6 x 136 mm
1 pc



O Flat-head coarse-thread screw


#8 x 30 mm
10 + 2 pcs



Ratcheting Screwdriver


SG019 | 5-Tier Bookcase | 80 cm

Multi-function ratcheting screwdriver Q

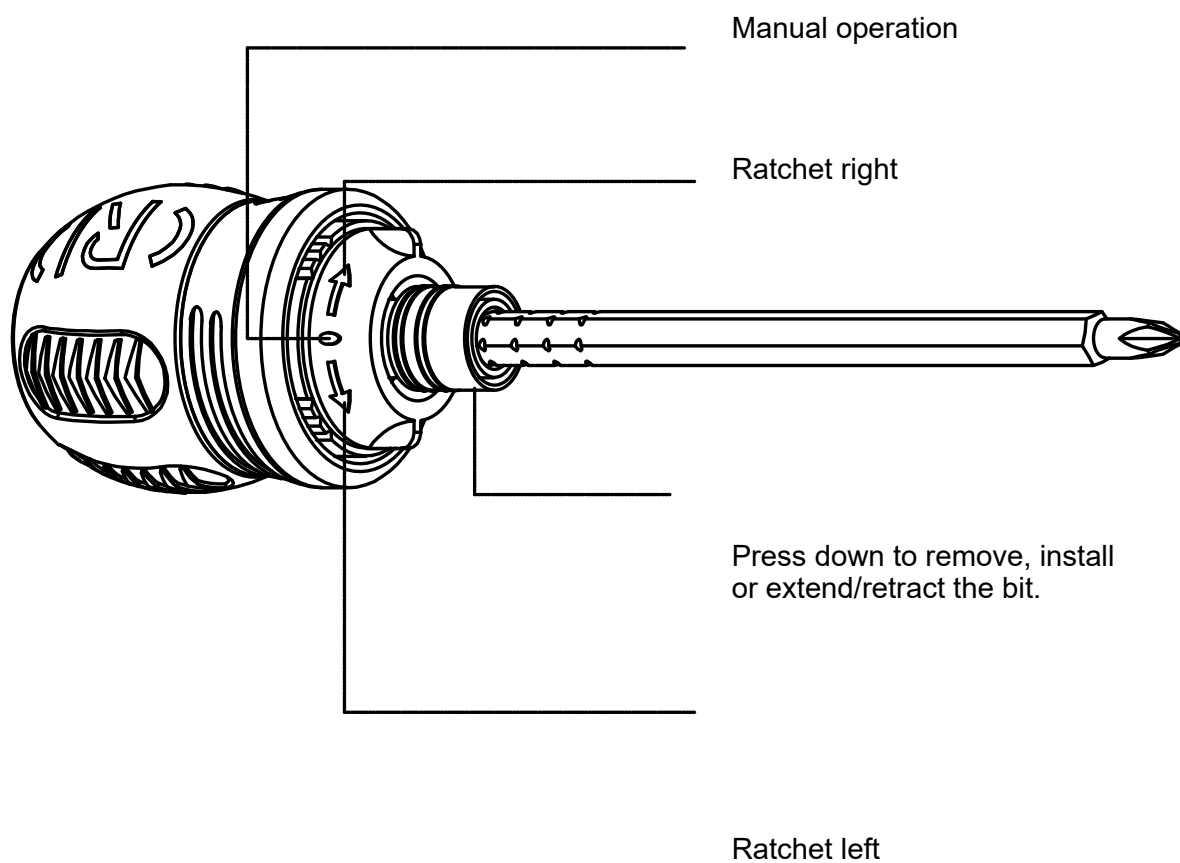


Cam Locks and Dowels


SG019 | 5-Tier Bookcase | 80 cm




1. Screw cam bolt B into the panel.




2. Insert cam lock A with its arrow pointing toward the panel edge.



3. Align B with A and insert fully into the cross-bored hole.




4. Turn A clockwise 190-230 degrees to lock the panels together.



5. Panels must fit tightly together and the connection must be rigid.

Insert dowel C at least halfway. Tap lightly with a rubber mallet if necessary.

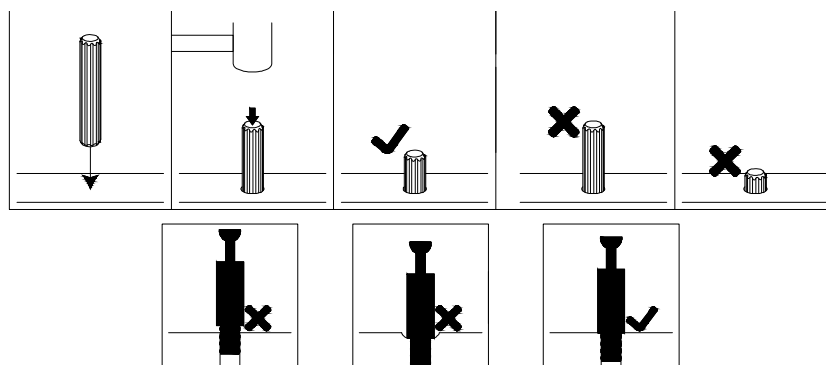

Warnings and Screw Selection


SG019 | 5-Tier Bookcase | 80 cm

WARNING


- The unit must be placed on a level surface or leveled with the included hardware (when applicable).
- Do not sit or stand on the assembled product or allow children to climb, sit or stand on it.
- For safety reasons, this unit must be mounted to the wall.
- Do not use without installing the tip restraint.
- The unit can tip over, causing severe injury or death.
- Do not exceed the recommended weight limits.
- Distribute weight evenly on each level and always keep heavier loads at the bottom.
- Before cutting, drilling or hammering into any wall or floor surface, check the location of electrical, plumbing and gas lines. Cutting may cause serious injury.

CAUTION


Use correctly sized screws to prevent damage to these components.

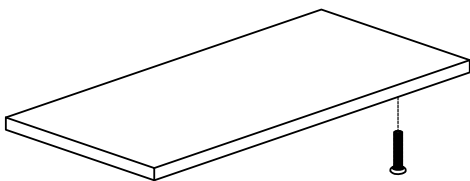

Example



Incorrect: may split the panel.

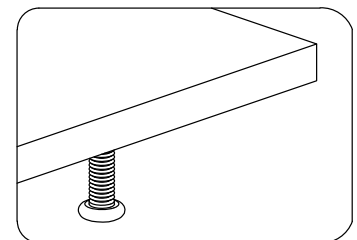

Correct screw size.



Step 1

SG019 | 5-Tier Bookcase | 80 cm

Install cam bolts B in side panels (1) and (2) using Q (Fig. 1). Separate slides I by pressing the black release tab and pulling outward (Fig. 2). Align the wide slide sections with the panel holes and secure with J and Q. Check the front and rear ends.

B x 24 | I x 1 | J x 12

Tool: Q (reused)

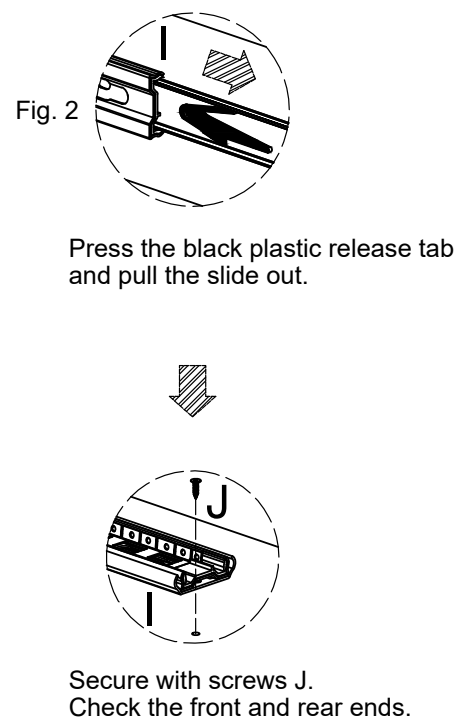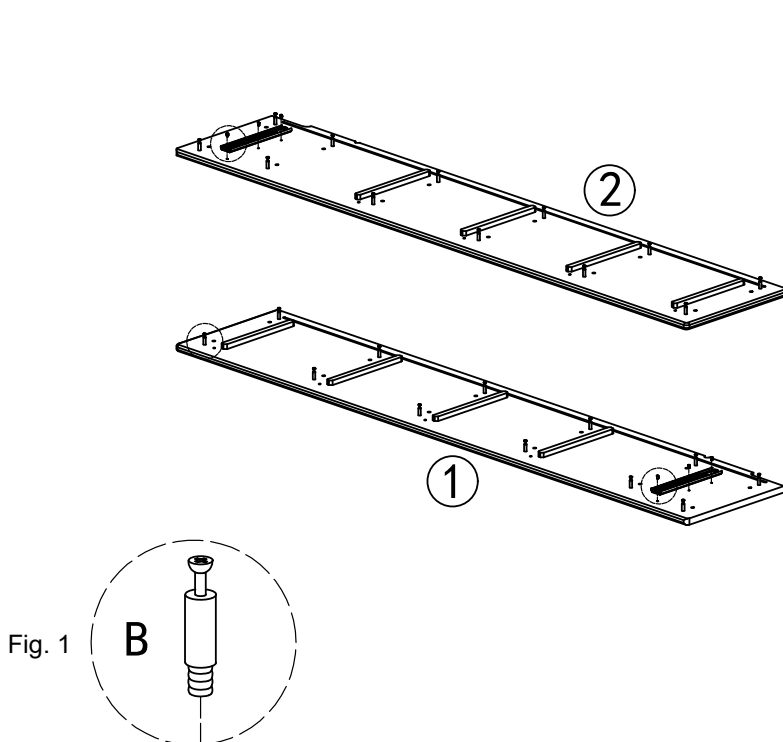


Step 2

SG019 | 5-Tier Bookcase | 80 cm

Connect panels (1), (3), (4), (5) and (6) using A and C with Q, as shown. Cover the holes with D.

A x 12 | C x 12 | D x 12




Tool: Q (reused)

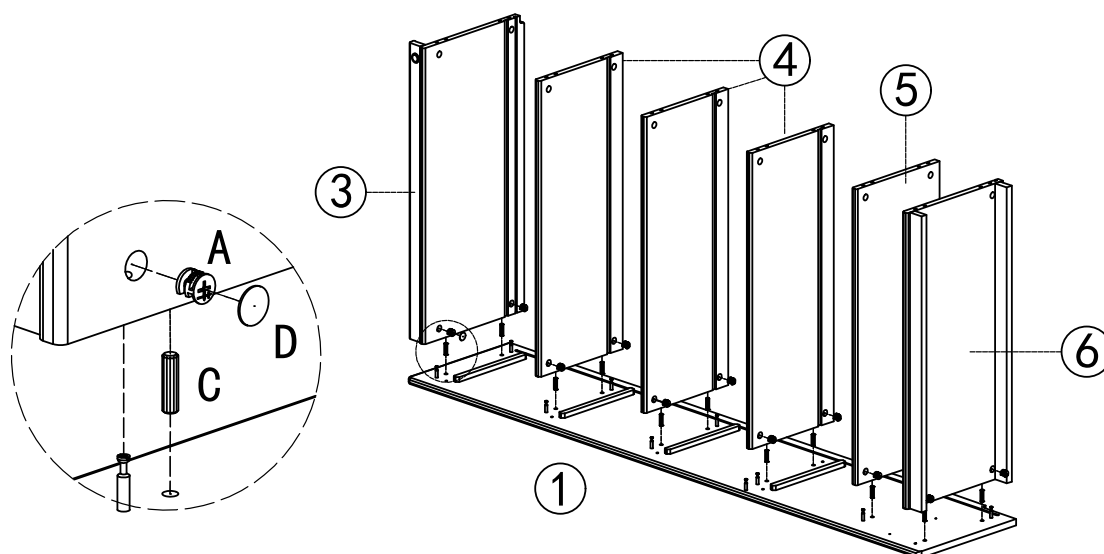

Step 3

SG019 | 5-Tier Bookcase | 80 cm

Insert back panels (7) and (8) into the assembly from Step 2 (Fig. 1). Position the notches in panels (7) at the upper right. Pull the LED strip cable connectors through the upper-right notches to the back (Fig. 2).

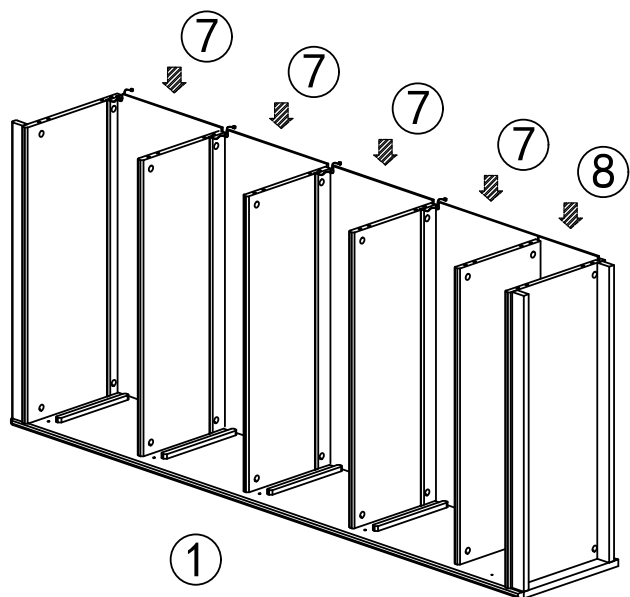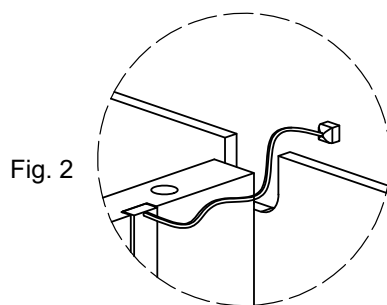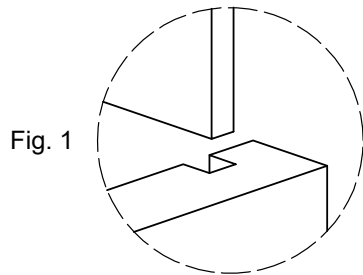


Step 4

SG019 | 5-Tier Bookcase | 80 cm

Attach side panel (2) to the assembly from Step 3 using A and C with Q. Cover the holes with D.

A x 12 | C x 12 | D x 12

Tool: Q (reused)

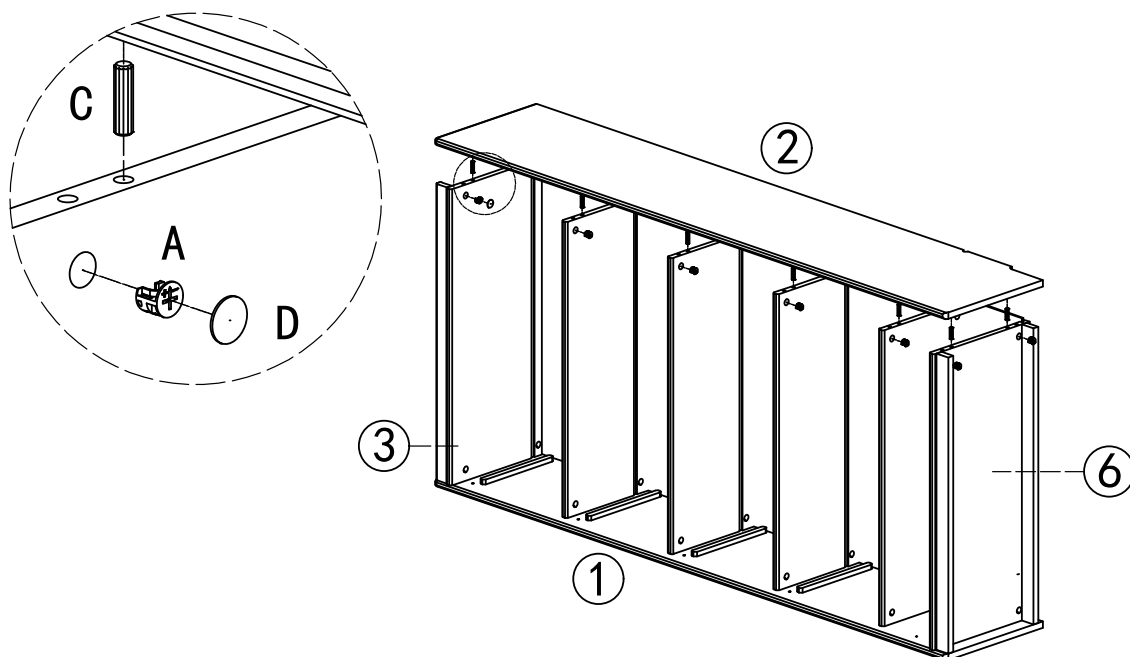


Step 5

SG019 | 5-Tier Bookcase | 80 cm

Secure back panels (7) and (8) to shelf panels (4) and (5) using screws F and Q.

F x 12

Tool: Q (reused)

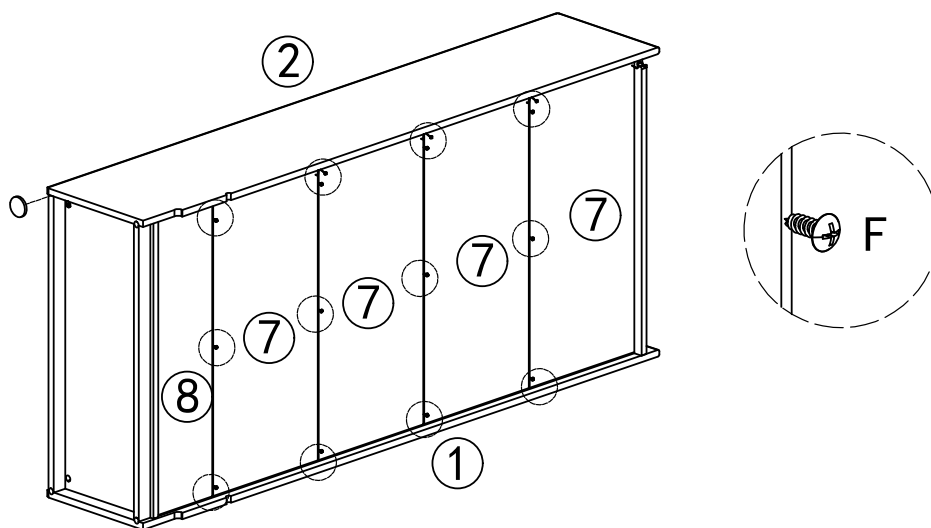

Step 6


SG019 | 5-Tier Bookcase | 80 cm

Secure the back panels using clips E and screws F with Q (Fig. 1). Connect each LED strip to the control switch (Fig. 2). Connect the control switch to the power socket, then plug in (Fig. 3).

E x 26 | F x 26


Tool: Q (reused)

Fig. 3





Connect the control switch to the power socket, then plug in.

Fig. 2



Connect each LED strip cable to the control switch as shown.

Fig. 1

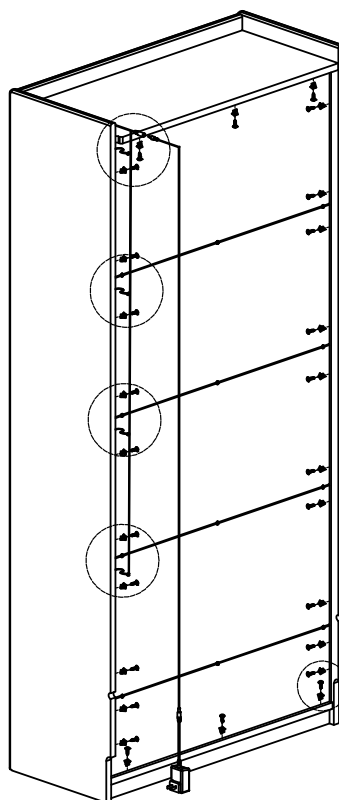


Step 7

SG019 | 5-Tier Bookcase | 80 cm

Insert pins K into the holes in side panels (1) and (2). Align the slots and install doors (9) on the assembly from Step 6. Apply pads L to the front ends of panels (4) and (5), on both sides. Lift each door parallel to shelf (4), then push inward to conceal it.

K x 8 | L x 8

Insert pins K into the holes in panels (1)/(2). Align the door slots with K and fit doors (9) to the assembly from Step 6.

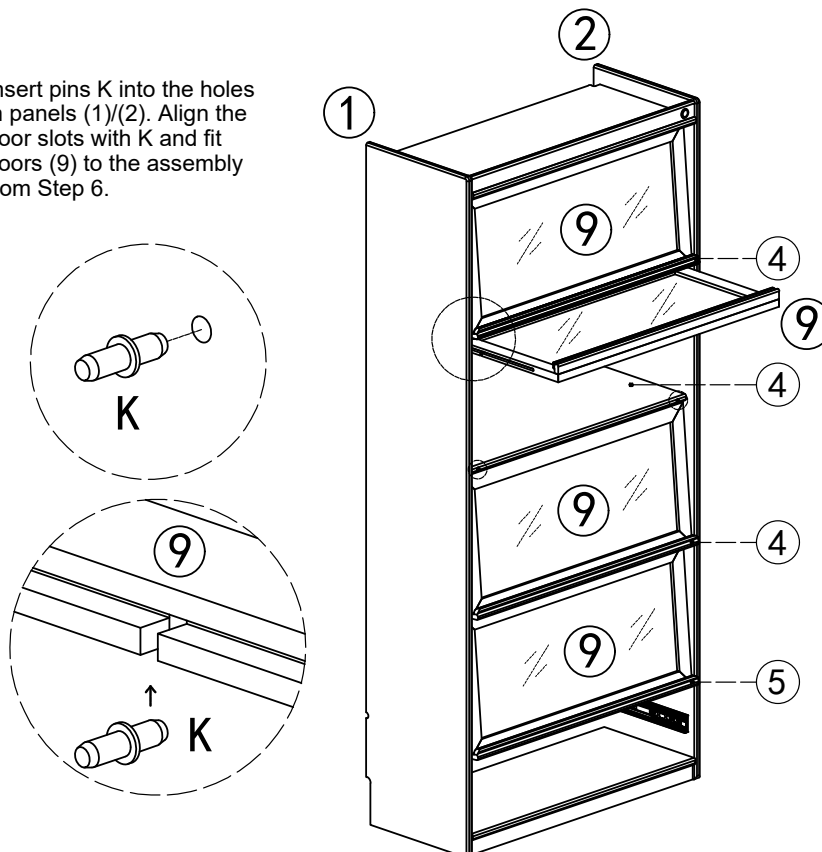

Apply pads L to both ends of panels (4)/(5). Lift each door parallel to shelf (4), then push it inward to conceal it.

Step 8



SG019 | 5-Tier Bookcase | 80 cm

Align the narrow slide sections I removed in Step 1 with the holes in drawer side panels (10) and (11). Secure using J and Q. Check the front and rear ends.

J x 12

Tool: Q (reused)

Check the front and rear ends of the slides.

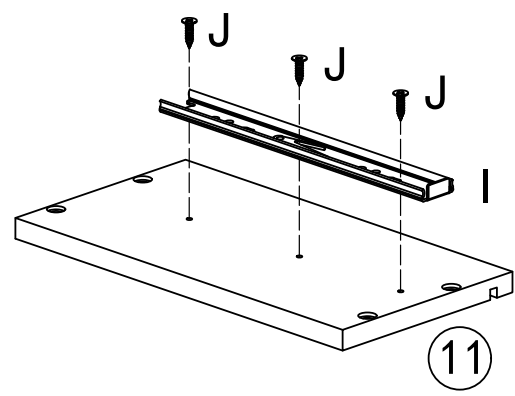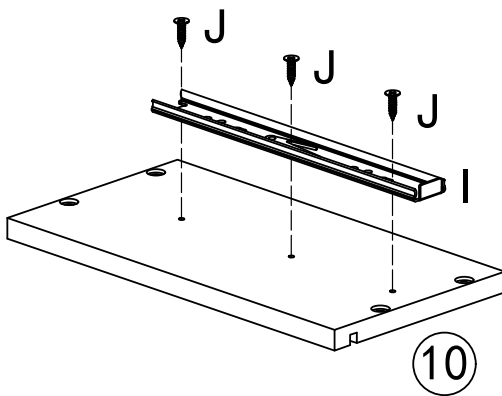


Step 9

SG019 | 5-Tier Bookcase | 80 cm

Join panels (10), (11) and (14) using O. Insert drawer bottom (13), then attach back panel (12) using O and Q (Fig. 1). Attach knobs G to front panel (14) using H and Q (Fig. 2).

G x 2 | H x 2 | O x 8

Tool: Q (reused)

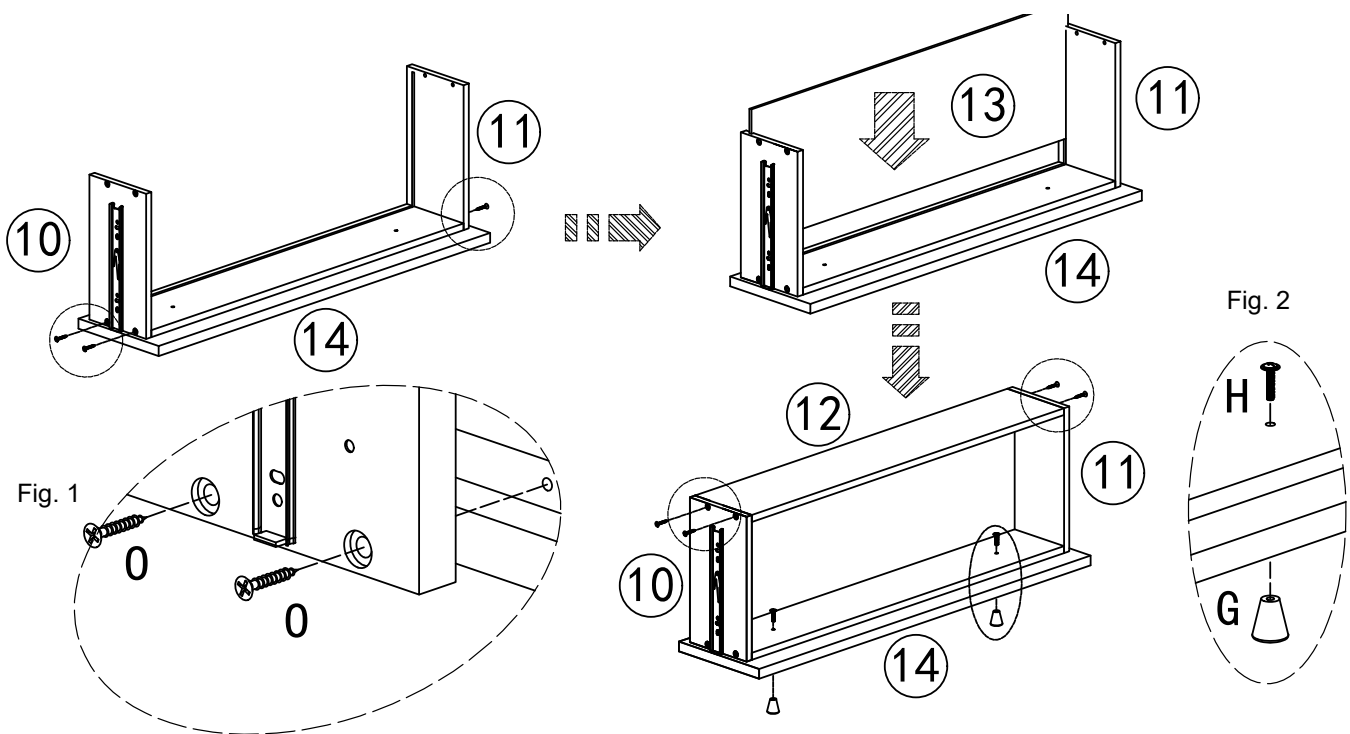


Step 10

SG019 | 5-Tier Bookcase | 80 cm

Turn over the drawer assembled in Step 9. Attach reinforcing strip (15) using O and Q, as shown.

O x 2

Tool: Q (reused)

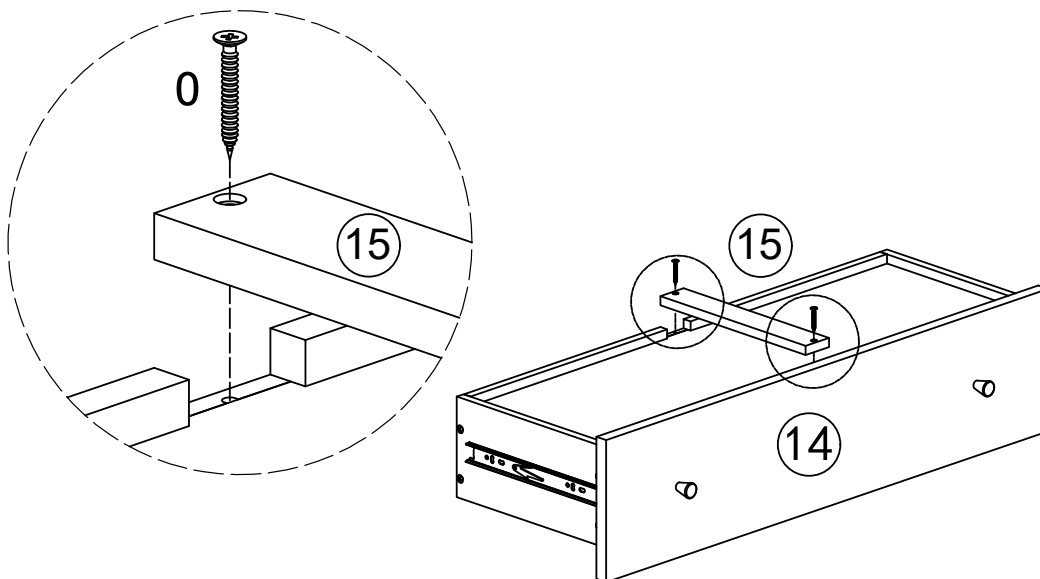

Step 11

SG019 | 5-Tier Bookcase | 80 cm

Pull out the cabinet slides and install the drawer assembly. Push the slides inward in stages (Fig. 1). Then secure the cabinet to the wall using anti-tip hardware M (Fig. 2).

M x 2 sets

Tool: Q (reused)

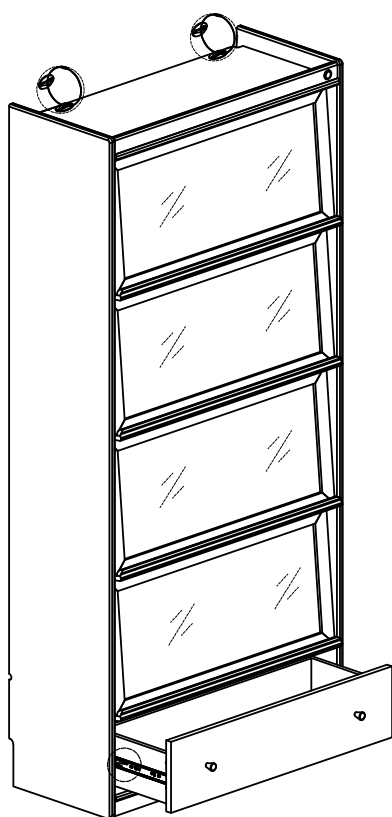


Fig. 2





Fig. 1

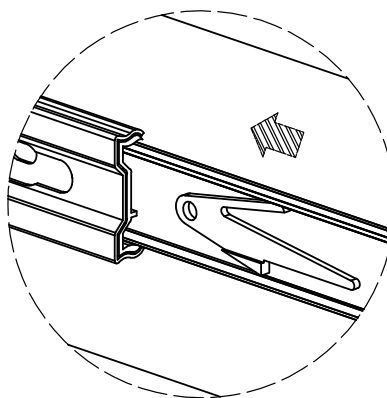

Step 12

SG019 | 5-Tier Bookcase | 80 cm

Connect power plug P. Assembly is complete.

P x 1

