SDQ Lighting

ASSEMBLY AND INSTALLATION INSTRUCTIONS


Item No: VL10501BG&VL10502BG

WARNING:TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES:

1. Before installing,consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.


PENDANT LAMP

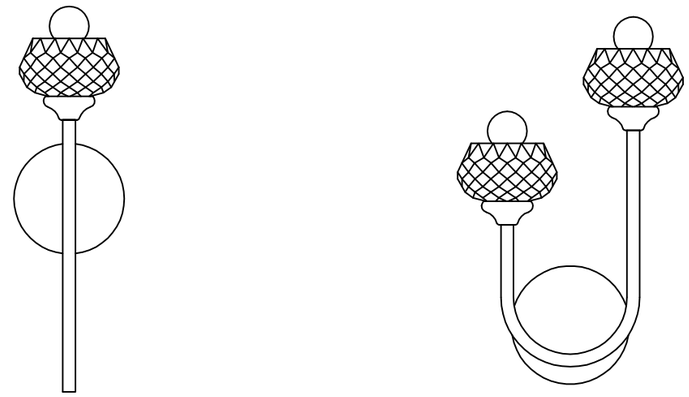

VL10501BG

VL10502BG

TOOLS REQUIRED

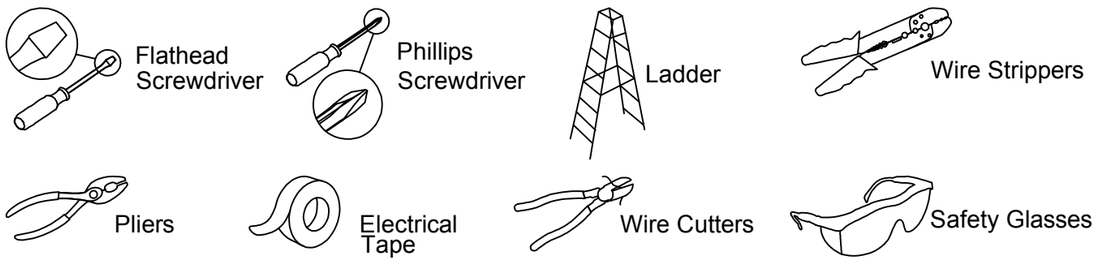

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.When the lamp is not installed finish,please don't throw away the package,so as not to leave the parts in the package.


PART LIST AND HARDWARE LIST


PIECE	DESCRIPTION
A	Mounting bracket
B	Outlet box screw
C	Mounting screw
D	Shaft crib

PIECE	DESCRIPTION
E	Aluminum lamp cup
F	Crystal
G	Aluminum outer ring

INSTALLATION

1. Attach the mounting plate(A) to the junction box with outlet box screw (B).
2. Attach the supply circuit ground wire (green or bare copper wire) to the the fixture ground wire,black to (black) and white to (white).
3.Attach the shaft crib(D) to the mounting plate(A) with mounting screw(C).
4.Install the crystal (F) with the aluminum outer ring (G) onto the aluminum lamp cup (E).
5.Install the bulb (not included) into socket.
6.Adjust the color temperature 3000K~4000K~5000K by moving the 3CCT switch
7.Control the switch through the wall. Turn on the first LED light, then turn on the second bulb, and finally turn on the LED and the bulb together for the third time.

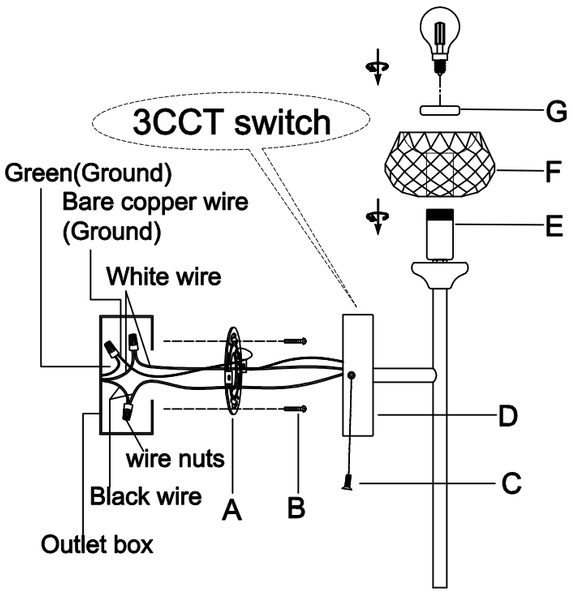

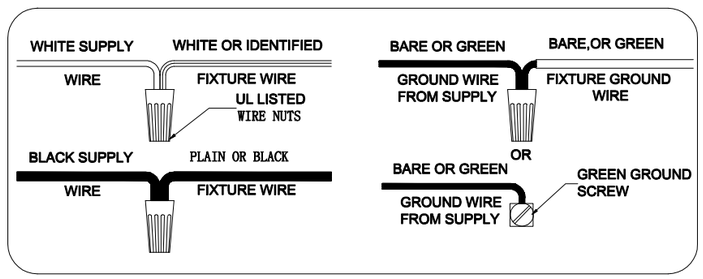

Thank you for purchasing a SDQ lighting product !
Need assistance with parts or assembly? Please call customer service at: 972-880-7868
Or visit us on-line at: WWW.SDQLIGHTING.COM or E-mail to:services@sdqlighting.com