

5-SHELF STEEL STORAGE UNIT

Important Safety Information



Read through this entire manual for important guidelines and instructions prior to assembly. Failure to follow these guidelines and instructions can result in property damage or serious personal injuries.

This unit should be placed on a level surface. Failure to do so can result in poor product performance or create a possible safety hazard. **DO NOT CLIMB, STAND or USE THIS UNIT AS A LADDER.** TO PREVENT TIPPING, ALWAYS SECURE TO A WALL WITH SUITABLE FASTENERS, NOT INCLUDED. **DO NOT USE THIS UNIT TO STORE AQUARIUMS.** CAUTION: CONTAINS SMALL PARTS, KEEP CHILDREN AWAY DURING INSTALLATION. USE TWO OR MORE PEOPLE TO ASSEMBLE AND MOVE THE UNIT TO AVOID INJURY. Do not use this unit for anything other than the manufacturer's intended purpose. Use care when working with metal parts, wear gloves for protection. Periodically inspect the unit to ensure brace/beam rivets are properly seated into post slots. Keep this manual for future reference.


Do not exceed the maximum weight capacity of 650 lbs (295 kg) for each shelf, not to exceed 3,200 lbs (1,451 kg) for the entire shelving unit. Evenly distribute weight loads across entire shelf surface. Always store larger, heavier items on the bottom levels and small lighter items on the upper levels.



Warranty

products are guaranteed for a period of one (1) year from the date of purchase. The **SOLE AND EXCLUSIVE REMEDY** for such defects is the repair or replacement of a defective product or parts thereof option, refund of the purchase price upon return of the item. This warranty shall not apply in the event the products are damaged as a result of misuse, neglect, accident, moisture, improper application, improper assembly, or assembly not in conformity with the instructions of , failure to abide by safety precautions prescribed or modification or repair by persons not authorized




Parts List

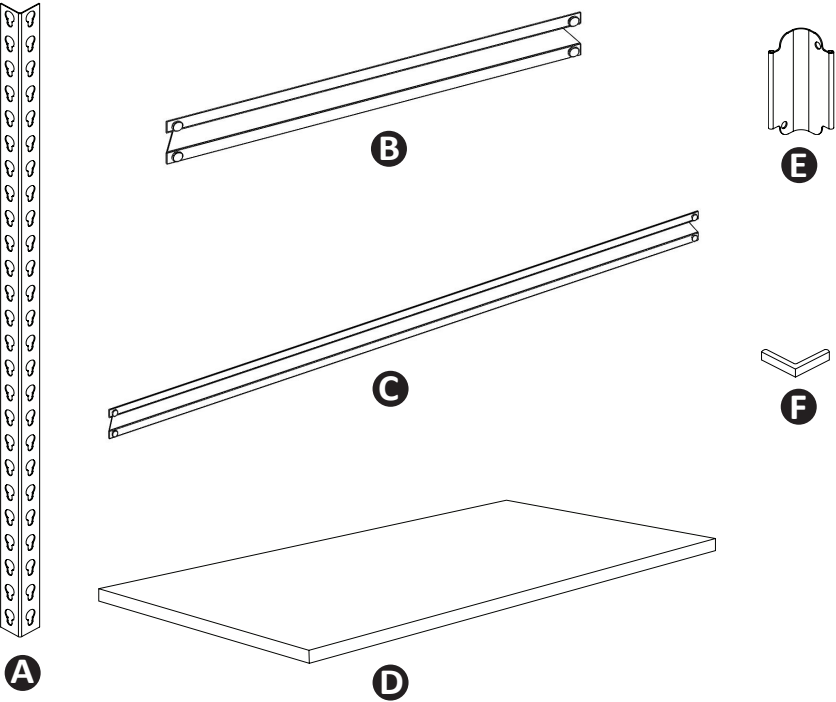

Parts List		
Description	Qty	Part#
A. Post	8	URPS36-BLK
B. Brace	10	URBR18-BLK
C. Beam	10	URBM60-BLK
D. Particleboard Deck	5	RPB31860
E. Post Connector	4	CPIN-BLK
F. Post Cap	8	RL-PC-B1

Preparation

Assembly of this unit is done by fitting the two rivets of the braces (B) and beams (C) into the keyhole slots of the post (A). The narrow end of the keyhole slots from the post must face down (see FIG.1). Braces and beams must be installed with the ledge facing up on the inside. Assemble the unit from bottom to top. It is recommended that the bottom shelf assembly be installed into the second keyhole slots at the bottom of the posts. The middle shelves should be evenly spaced. A rubber mallet should be used to tap down on the top of the braces and beams to properly seat the rivets down into the narrow end of the keyhole slots (see FIG. 2 and FIG. 3).

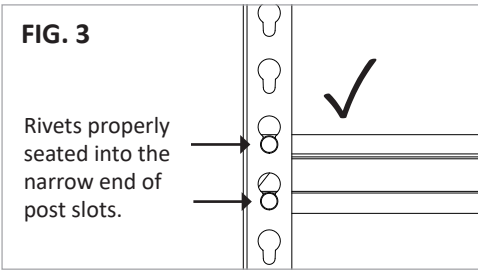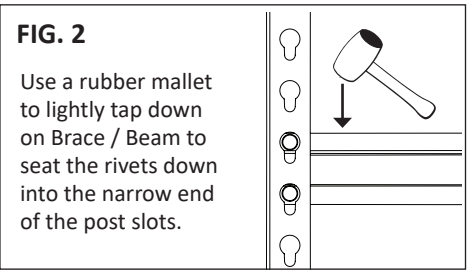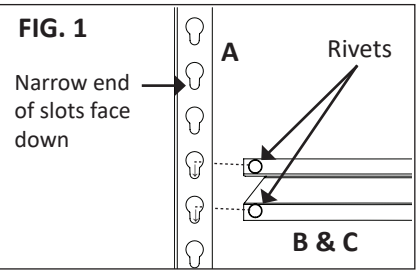

ALTERNATE ASSEMBLY

This unit can also be assembled as two separate 36 in. high units (see FIG. 4). One unit will have three shelves and the other will have two shelves. If choosing this option, follow assembly steps 2, 3, 4, 5 and 9 until all shelf levels are completed for both units. Note: Use all 8 of Post Caps (F) in final step 9. Post Connectors (E) are not used for this setup.


HELPFUL TOOLS/ITEMS FOR ASSEMBLY (NOT INCLUDED):



Rubber Mallet




Gloves

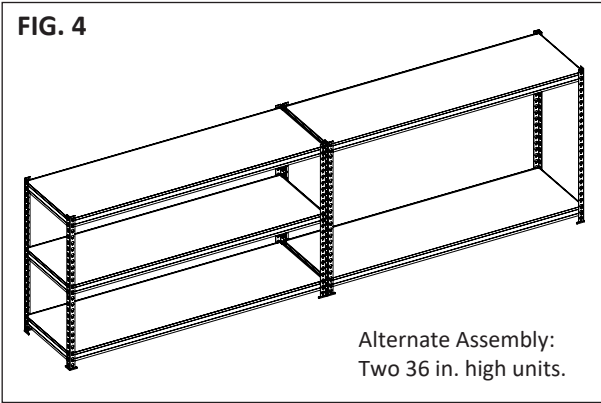


Assembly


1 Assemble A (x4) & F (x4)

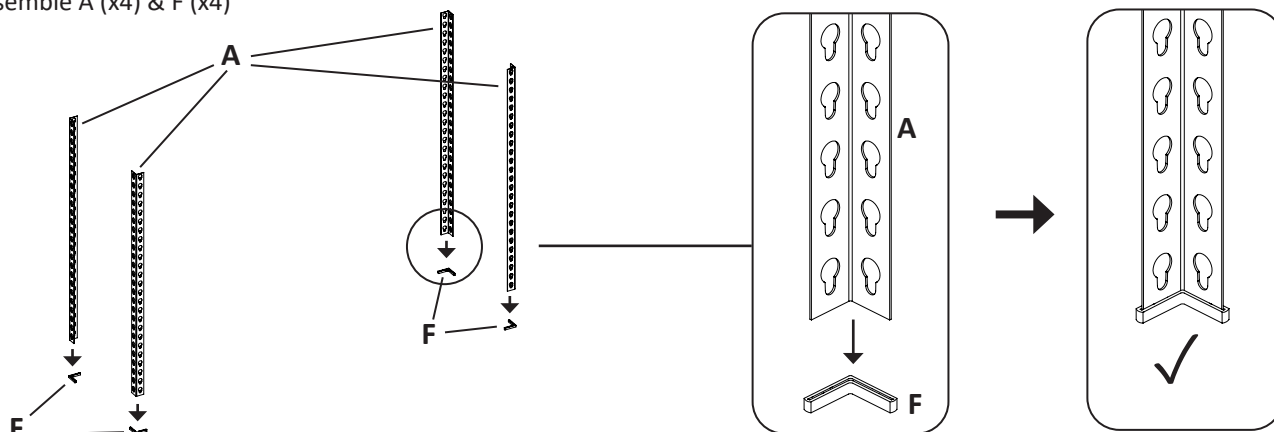


2 Assemble B (x2)

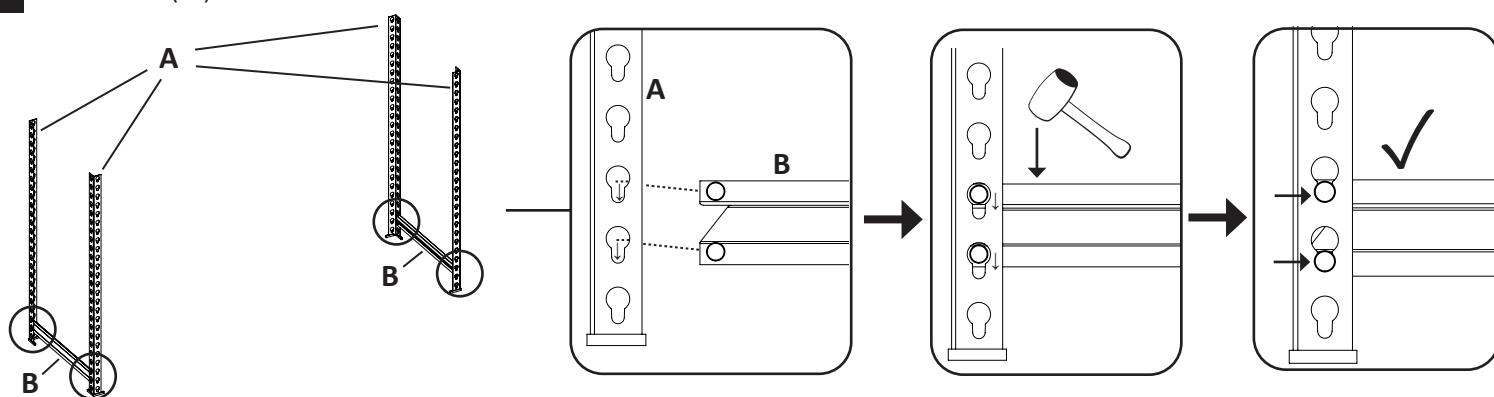


3 Assemble C (x2)

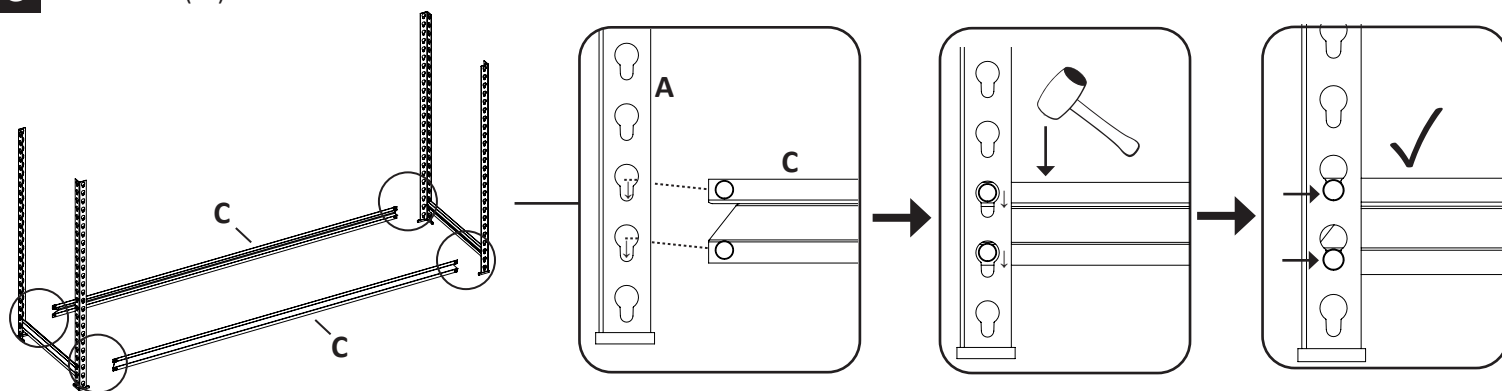

4 Assemble D (x1)

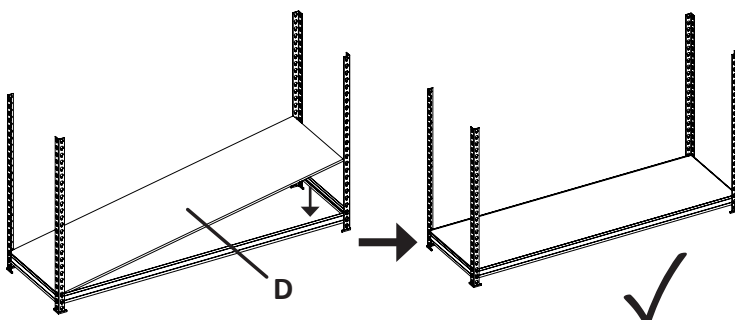


5 Assemble next shelf level using B (x2), C (x2) and D (x1) by repeating same steps as 2, 3 and 4 at the desired location

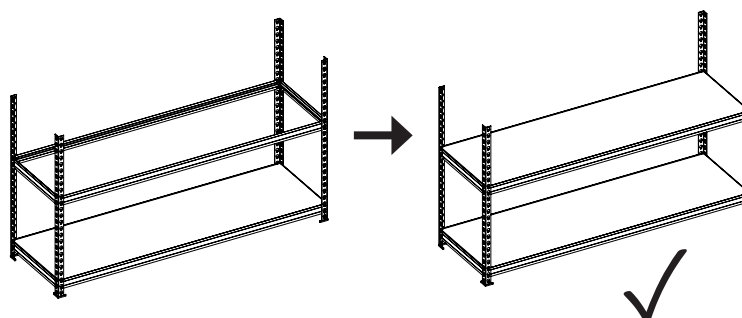


Assembly


6 Assemble E (x4) to the assembled four posts

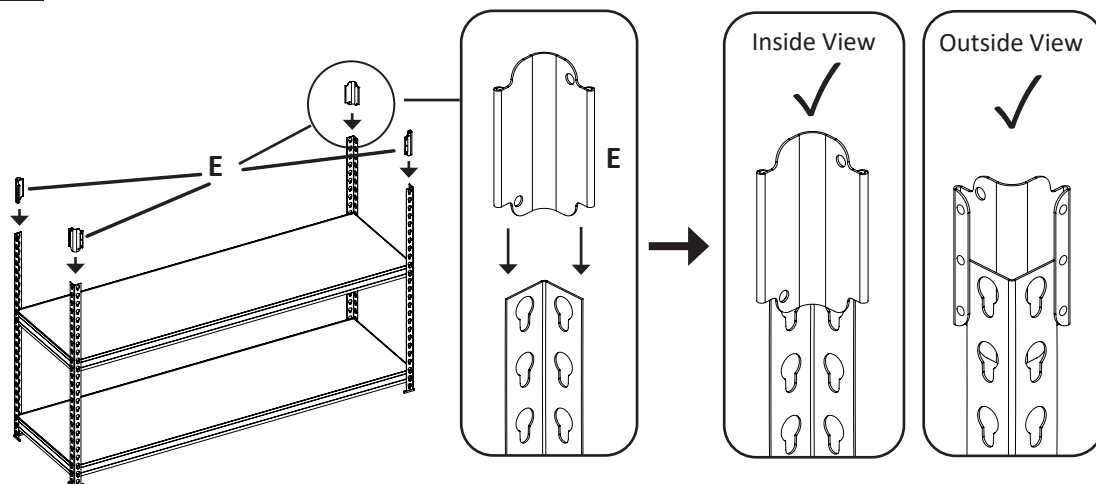


Note: A rubber mallet may be used to help secure the post connector halfway onto the post by lightly tapping down on the post connector once it is attached to the posts.

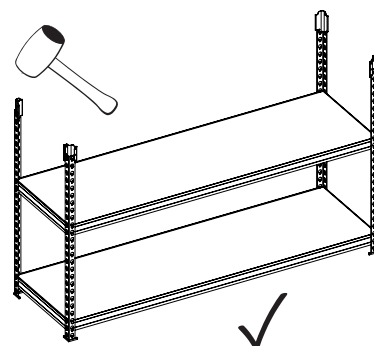


7 Assemble A (x4) to the four assembled post connectors

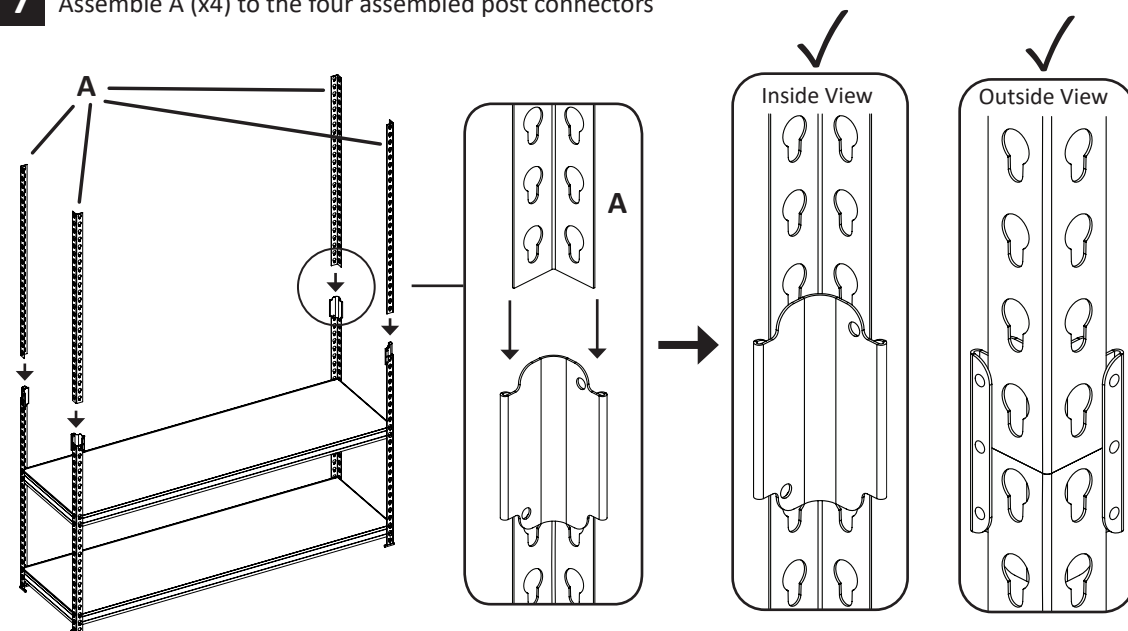

Note: A rubber mallet may be used to help secure the top post into the post connector by lightly tapping down on the post once it is attached to the post connector.

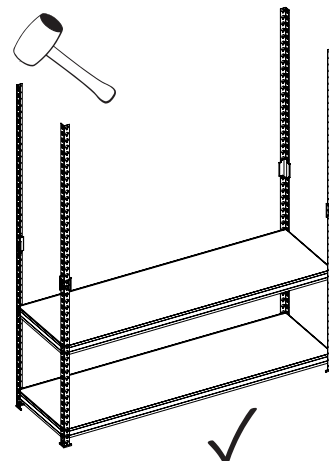

8 Assemble the final three shelf levels by repeating same steps as 2, 3 and 4 at the desired location using B (x2), C (x2) and D (x1) per level

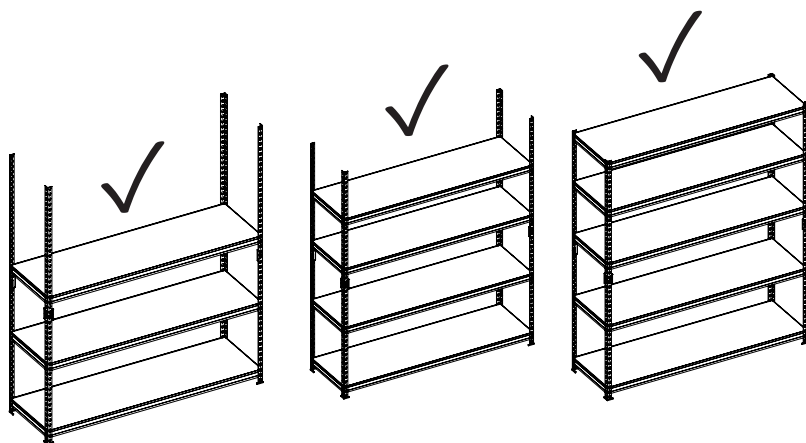

9 Assemble F (x4) to the top of the assembled four posts

