


# USE AND CARE GUIDE

## Installation or Assemble Instructions

Model No: crystal chandeliers

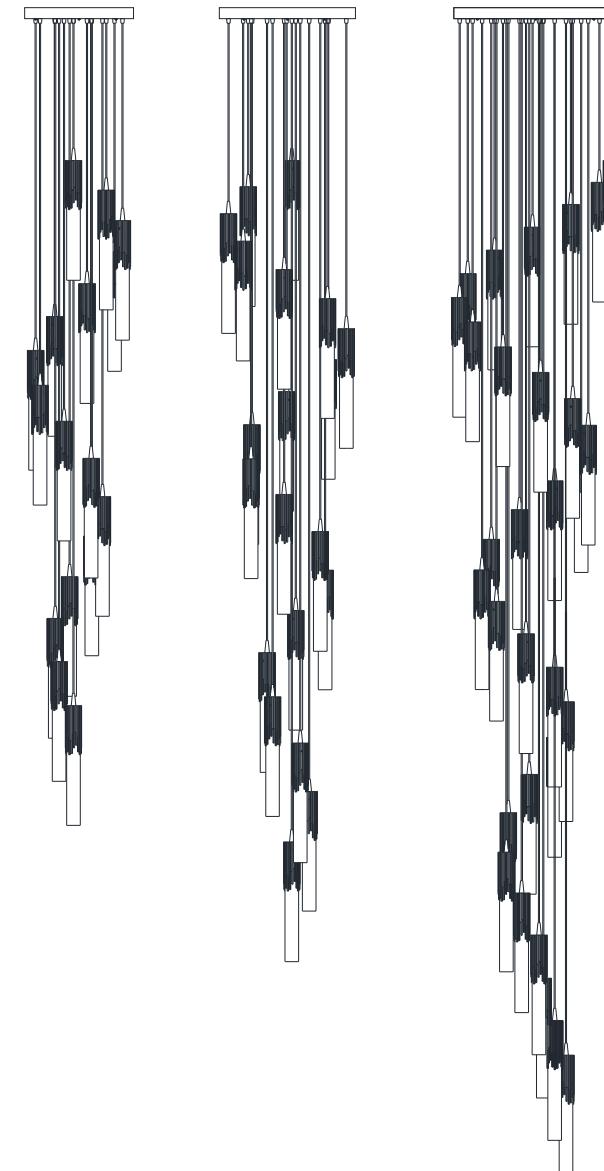

### USE AND CARE GUIDE

crystal chandeliers

**WARNING:** Be sure the electricity to the wires you are working on is shut off ; Either the fuse is removed or the circuit breaker is turned off. Turning the power off using the light switch is not sufficient to prevent electrical shock.

**NOTE 1.** The important safeguards and the instructions appearing in this manual are not meant to cover all possible conditions or situations the may occur. It must be understood that the common sense,caution and care are factors which cannot be built into any product. These factors must be supplied by the person(s) installing this unit.

**NOTE 2.** Before installing, you need to check with your house builder or the installer to make sure that your ceiling can support the weight of the chandelier.

**NOTE 3.** The chandelier must be installed by a licensed, bonded and insured electrician to do the electrical part of the installation

**NOTE 4.** The outlet box and bracket support structure must be securely mounted and capable of reliably supporting 11lb(5kg) - 88lb(40kg).

**NOTE 5.** The Chandelier must be mounted with a minimum of 7 ft. (2m) clearance from the ceiling edge of the to the floor.

**NOTE 6.** The chandelier has its own dimmer and cannot be used together with your own dimmer (to avoid short circuit).


**NOTE 7.** After the base is installed and electric wires are connected, hanging the crystal strings should be straight forward, arrange crystal strings from the inside to the outside . It does take some time and patience, but it is totally doable by yourself. Or you can hire a handy man to do it for you whose hourly rate will be much lower than a professionally electrician.

Our company warrants its chandelier light unit for Five year from the date of purchase. The warranty includes all parts provided, we provide the replacements for any missing or damaged parts. the unit is installed properly by a licensed electrician. Labor charges will be the responsibility of the purchaser. If the unit does not operate properly, the purchaser must contact us to determine if the unit was installed properly. Any alteration or by-passing of the electrical or mechanical system of exceeding the wattage maximum (as indicated on the chandelier) will void the warranty and can result in an electrical hazard.

If there are any problems about the item, please contact with us via order page.


STEP 9: Check

Congratulation, you have completed the installation for your chandelier! One last thing to do is to check it from a distant just to make sure that the crystal chandelier is leveled and at proper height. Make additional small adjustment as needed. After ensuring safety, you can turn on your house’ s power switch and the light switch for the crystal chandelier. Now you can enjoy the beautiful chandelier that you just installed for your home.

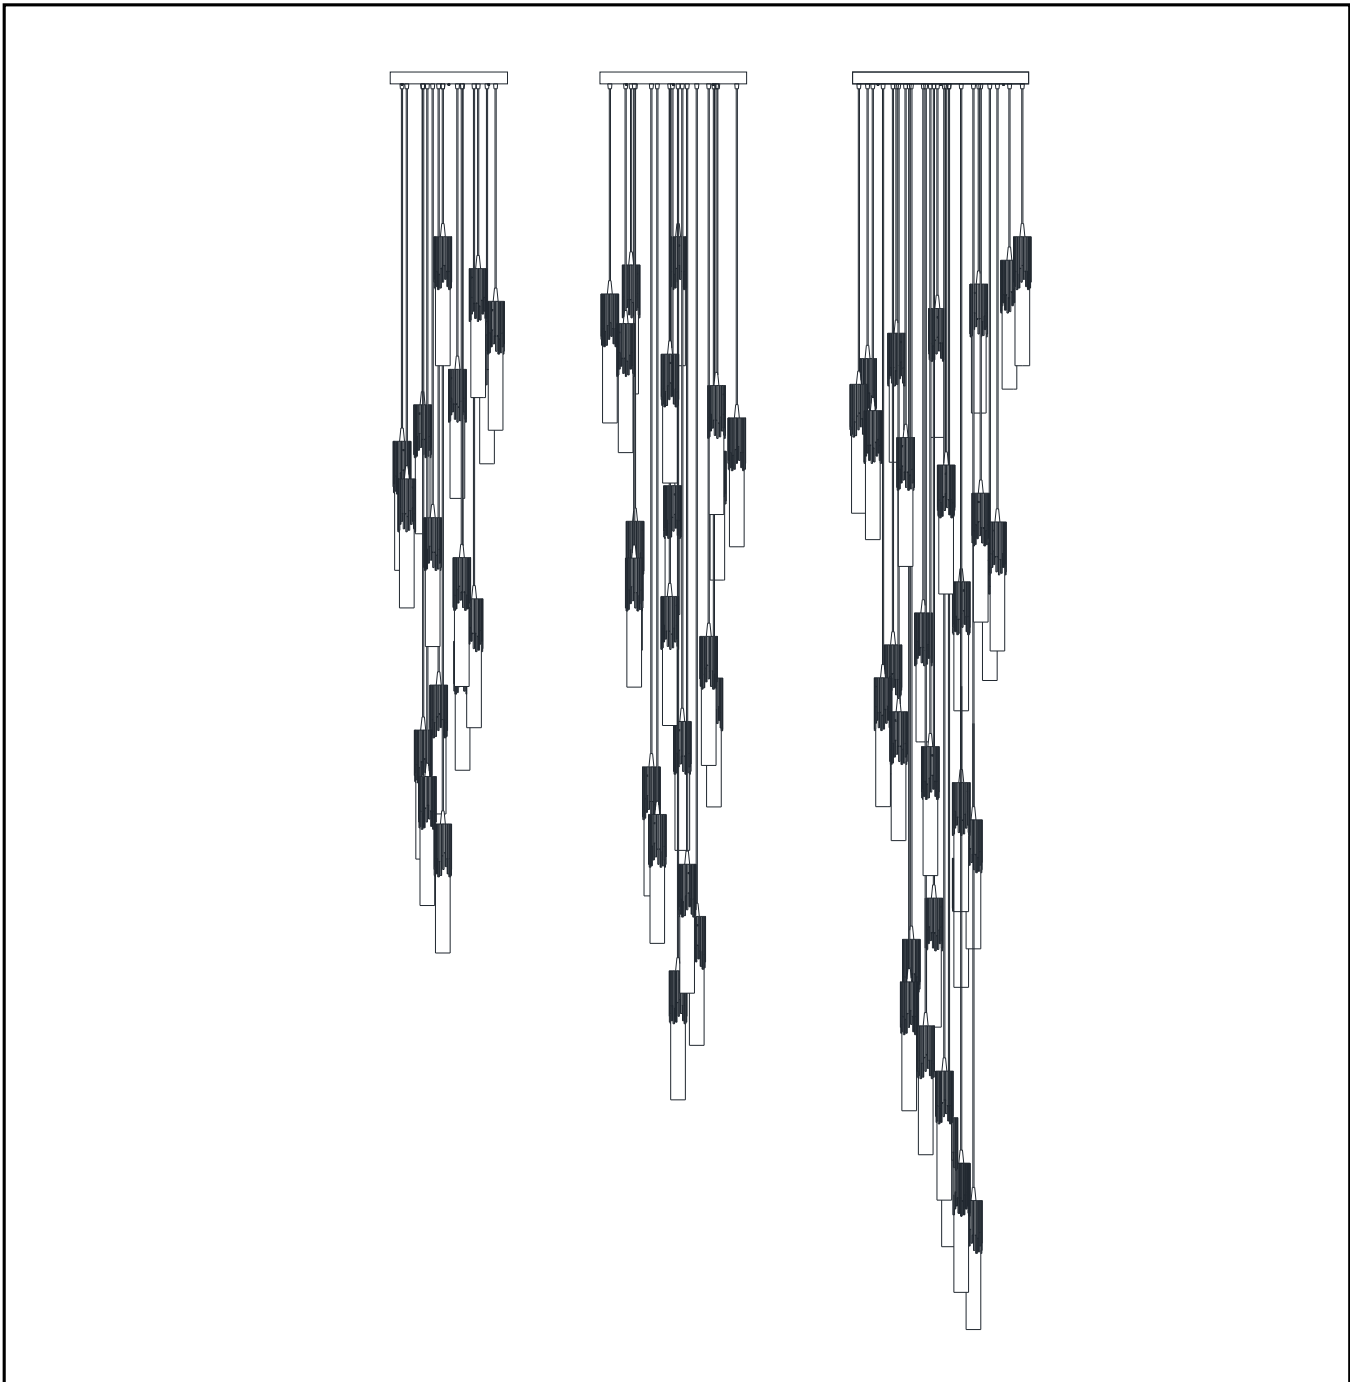


STEP 1: Preparation

Make sure that all the parts that you need for the product are available based on the instruction before starting the chandelier installation process. Also, **we do recommend you have the electrician test the chandelier on the ground before installing it to the ceiling just to ensure that there is no damage during shipping.**

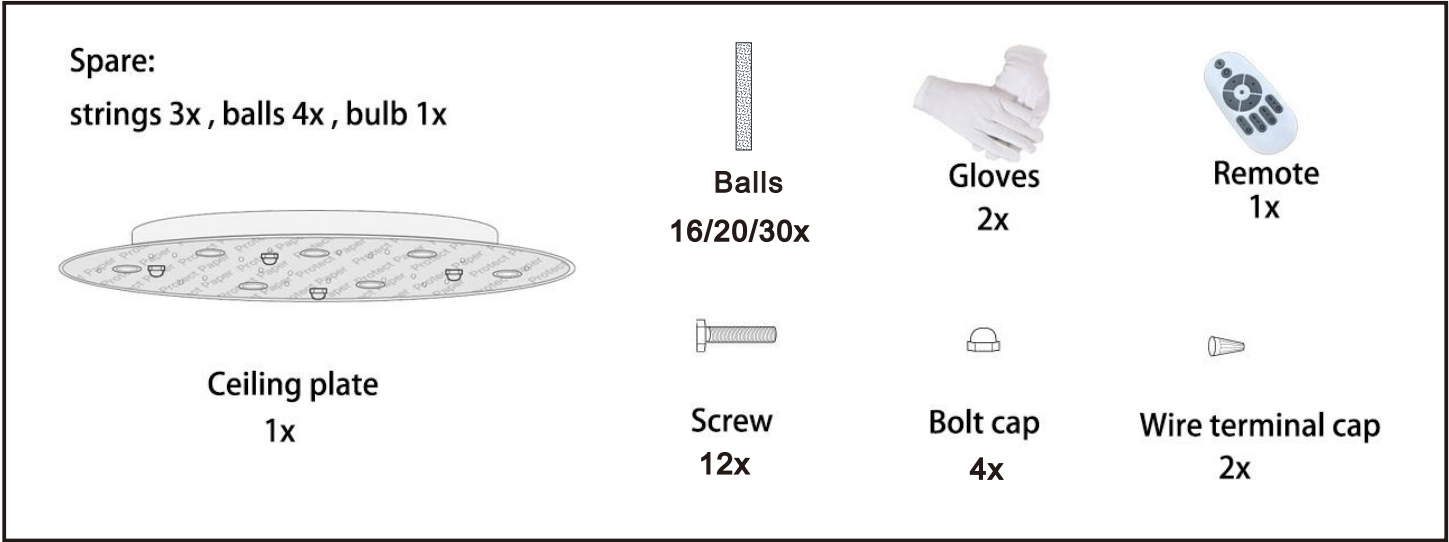

1.The tools you need


Ladder, pliers, wire strippers, screwdrivers, power drill(optional), a drill bit(optional)

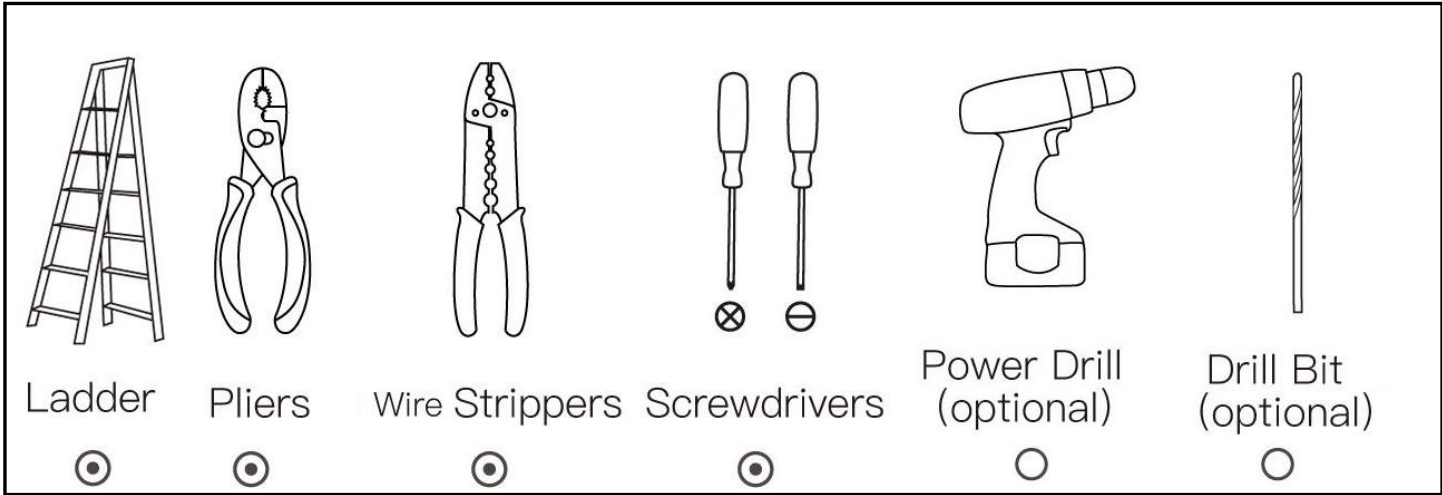

Tips: If mounting to a support structure, you will also need the other option tools.

2.Turn off the power


Turn off power at the circuit box to avoid possible electric shock.

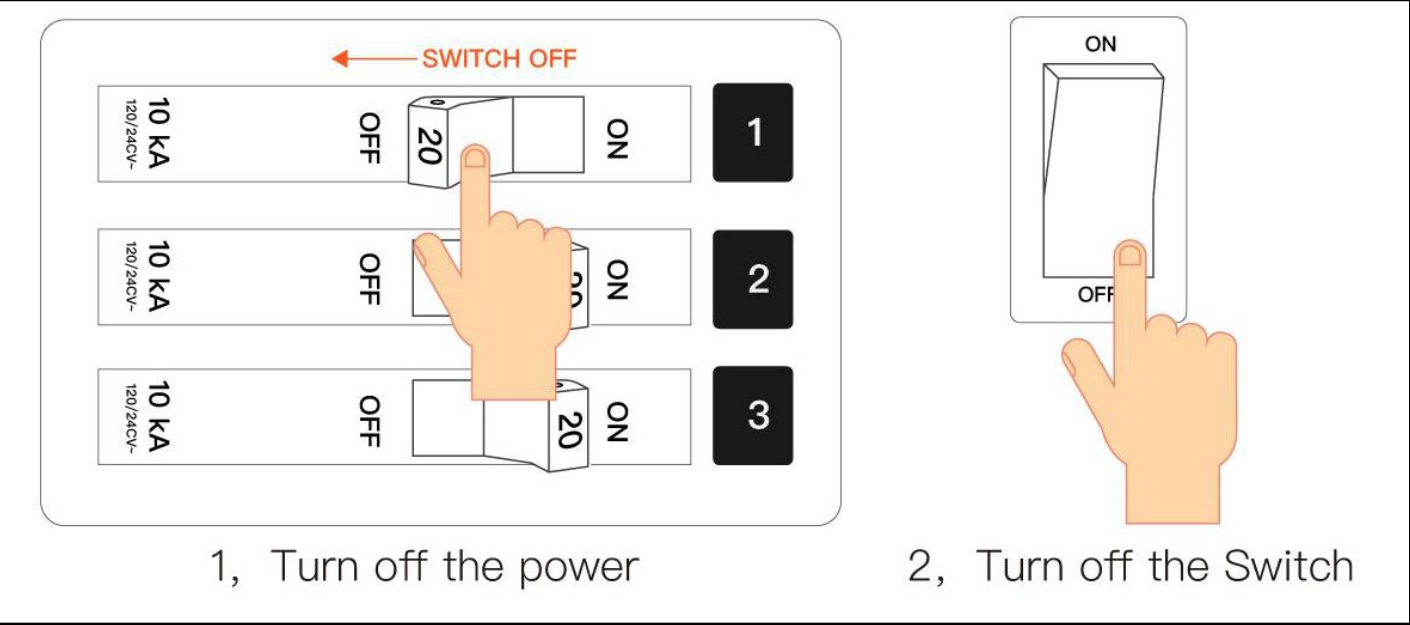


Tips: To ensure safety, you can test with a measuring pen, or you can turn on the light switch to make sure the power is off.

STEP 2: Install the Mounting Bracket

①Place mounting bracket on ceiling and mark out the points where you need to drill holes.

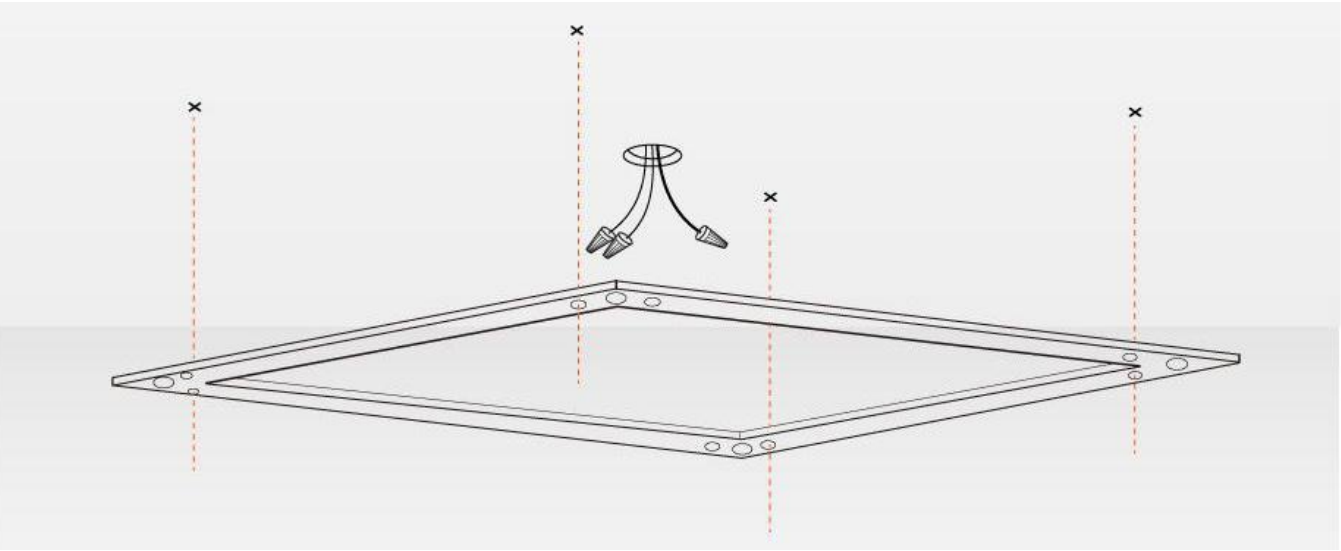


Installation instructions of crystal balls

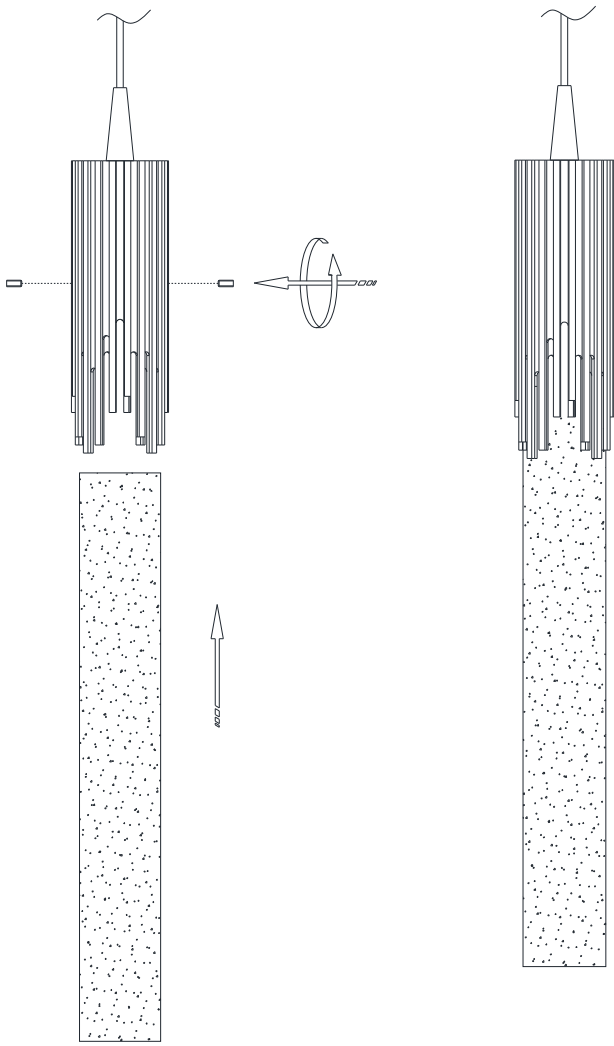

STEP 4: Install the crystal strings

In order to save your time, this chandelier is in a spiral shape from the factory. The hanging wire has been adjusted,

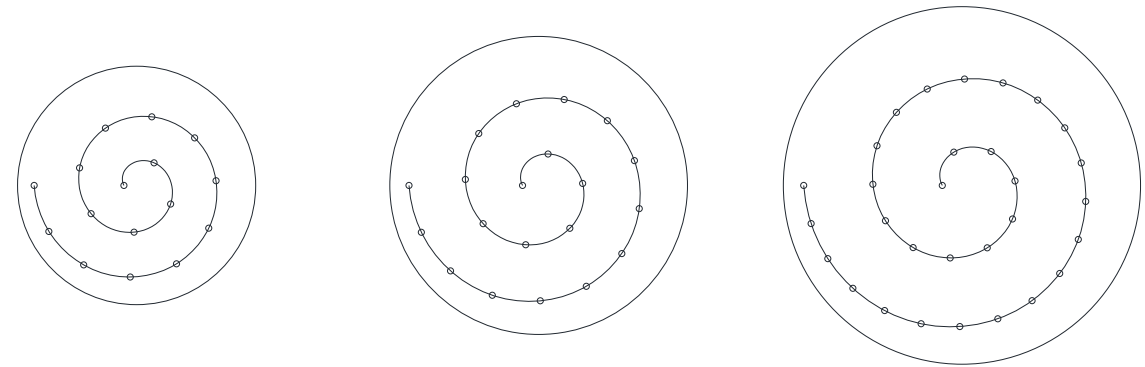


YPUS0018-16

YPUS0018-20

YPUS0018-30

Arrange crystal strings

we have arranged the shapes of the lamps in a spiral state. If you need to mess up the shape, you can adjust the length of the hanging wire to achieve the shape you want.

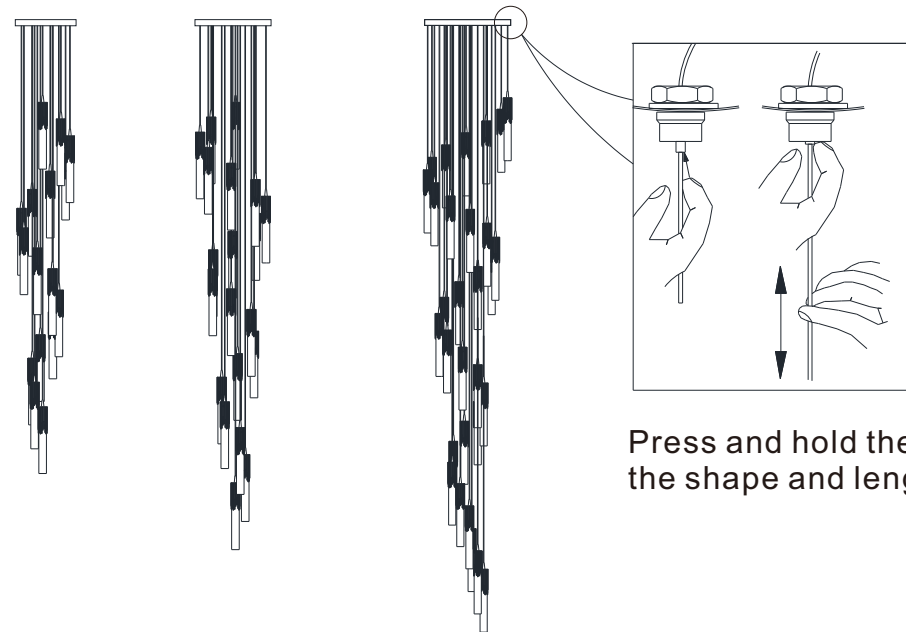


Press and hold the shrink button to adjust the shape and length you need!


YPUS0018-16 YPUS0018-20 YPUS0018-30

STEP 2: Install the Mounting Bracket

② Insert the machine screws into the mounting bracket.

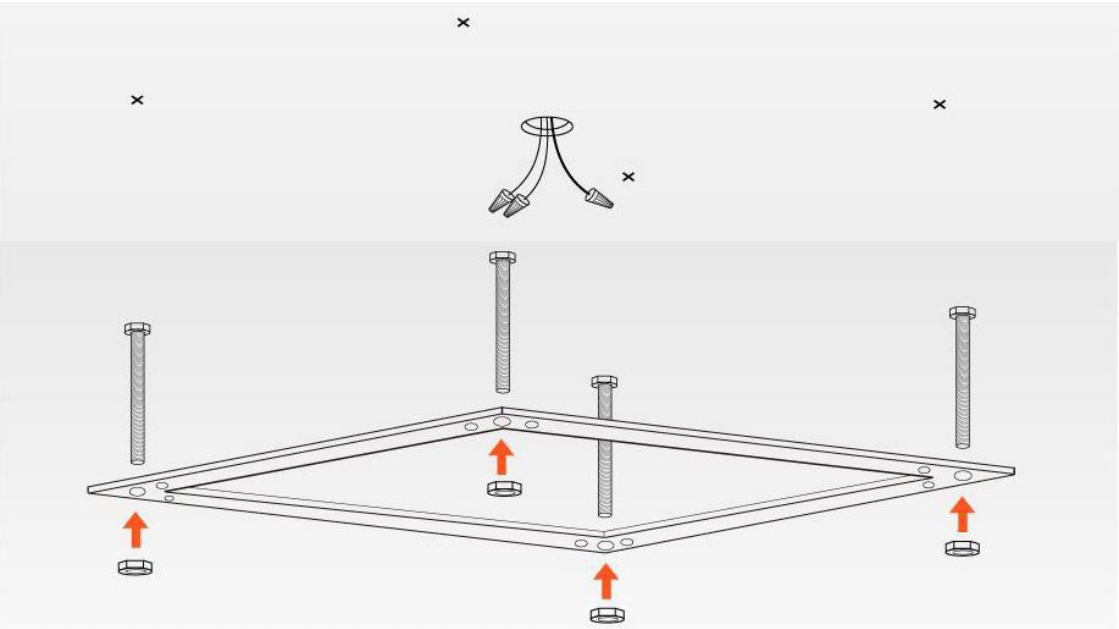


③ Attach the bracket to the structural substrate with screws.

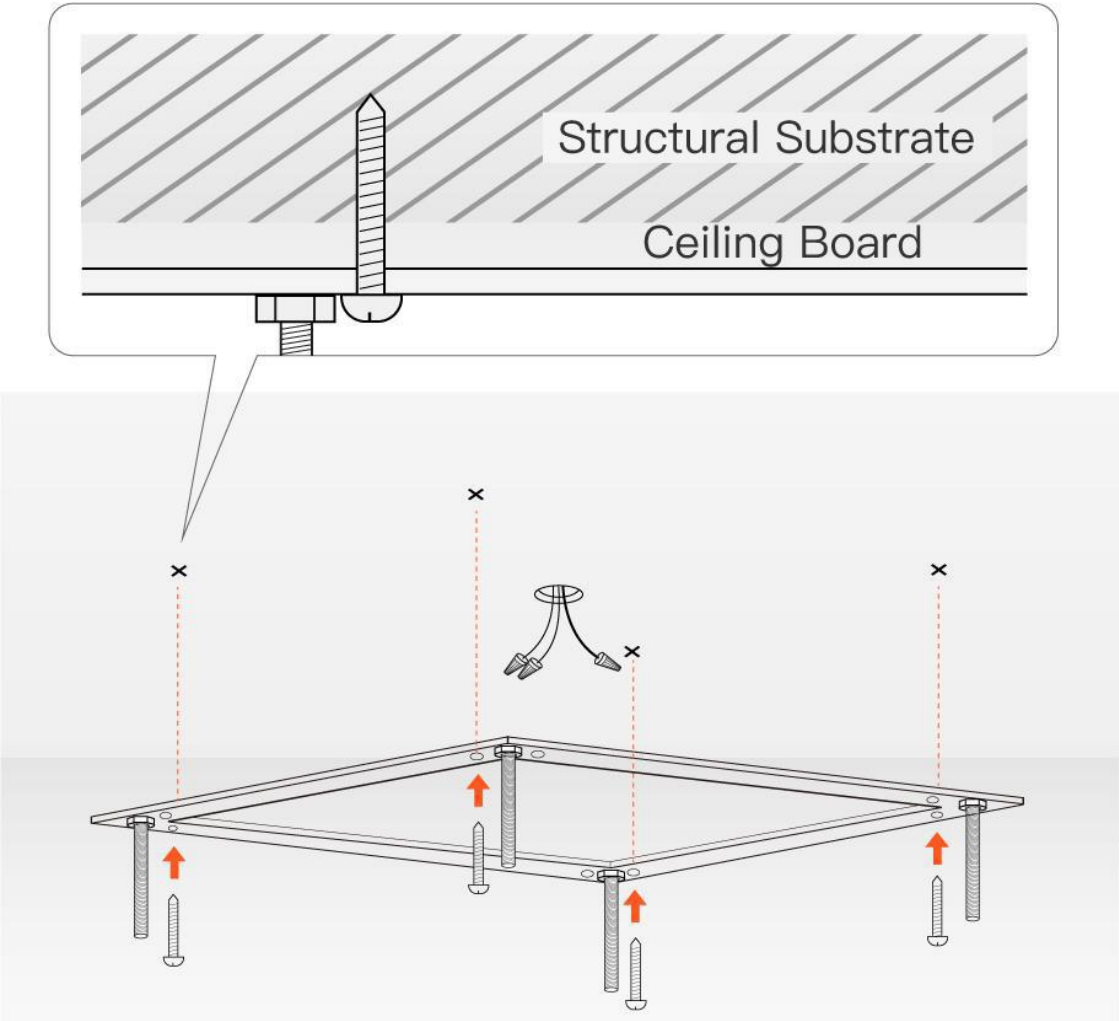



## STEP 2: Install the Mounting Bracket


④ Completed

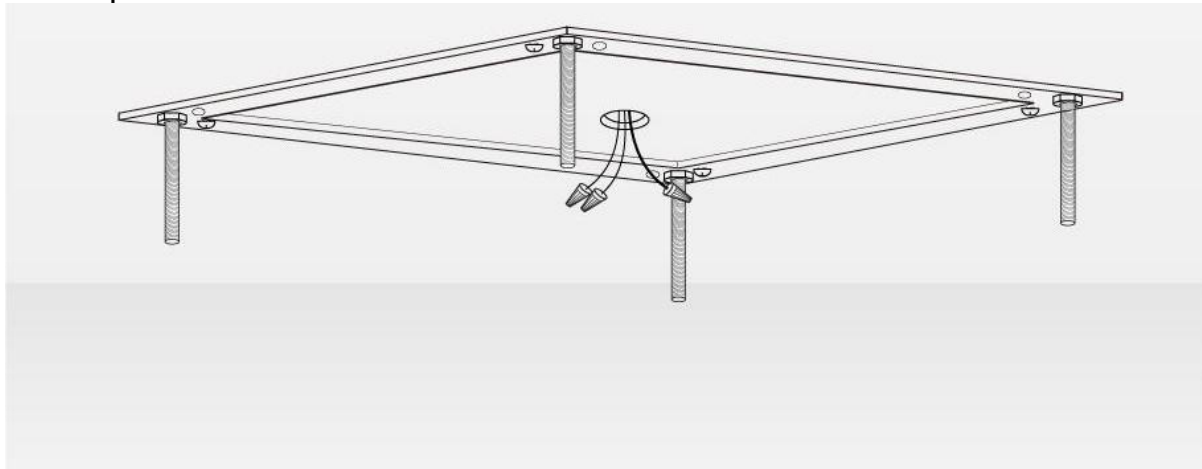

## STEP 3: Connect wires and install the canopy.


Most chandeliers have black and white lines. Connect the black/brown wire to the live wire, the white/blue wire to the neutral wire, and the yellow/green wires to the ground wire (optional). Attach the stripped end of the black power cord with the stripped end of the black/brown wire of the chandelier and screw them together with a wire nut. Do the same for the white/blue wire with the white power cord.

① Connect the wires based on the instruction above and attach canopy to the mounting bracket with bolt cap (provided).

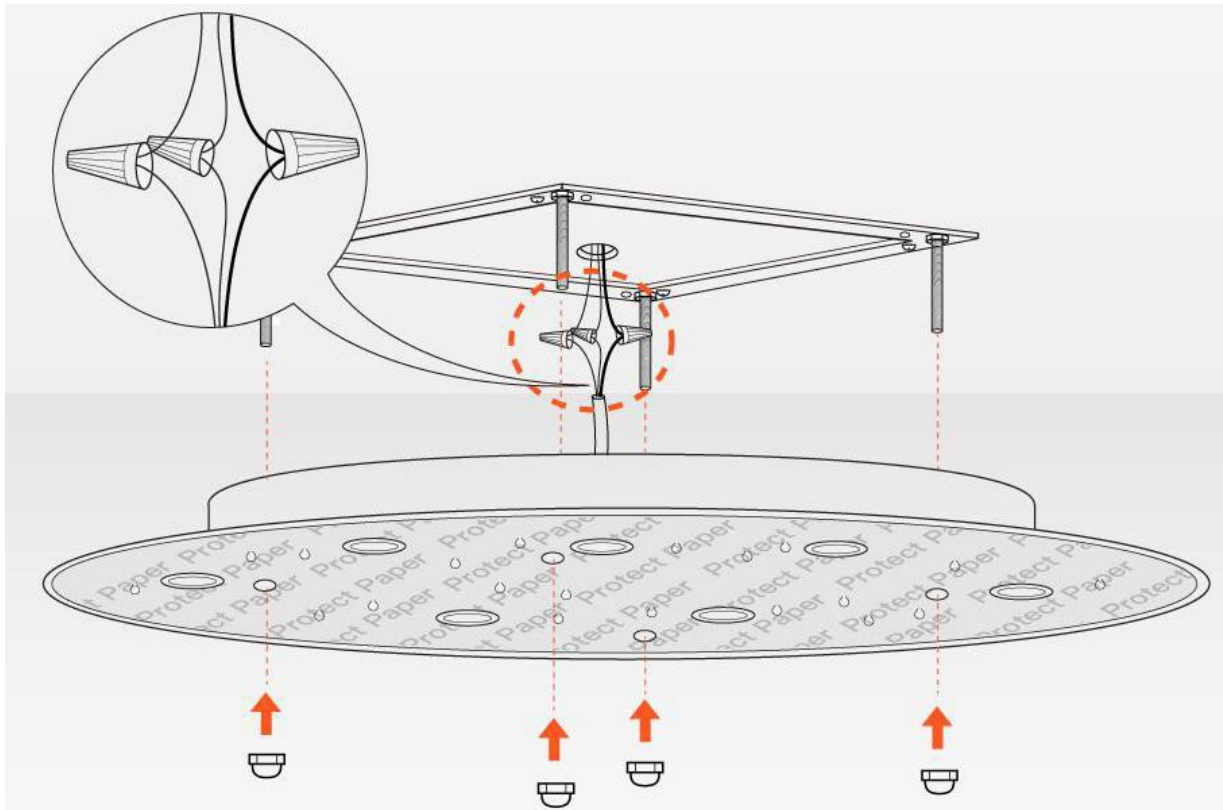

## STEP 3: Connect wires and install the canopy.

② Remove protective film on the canopy and chandelier base.

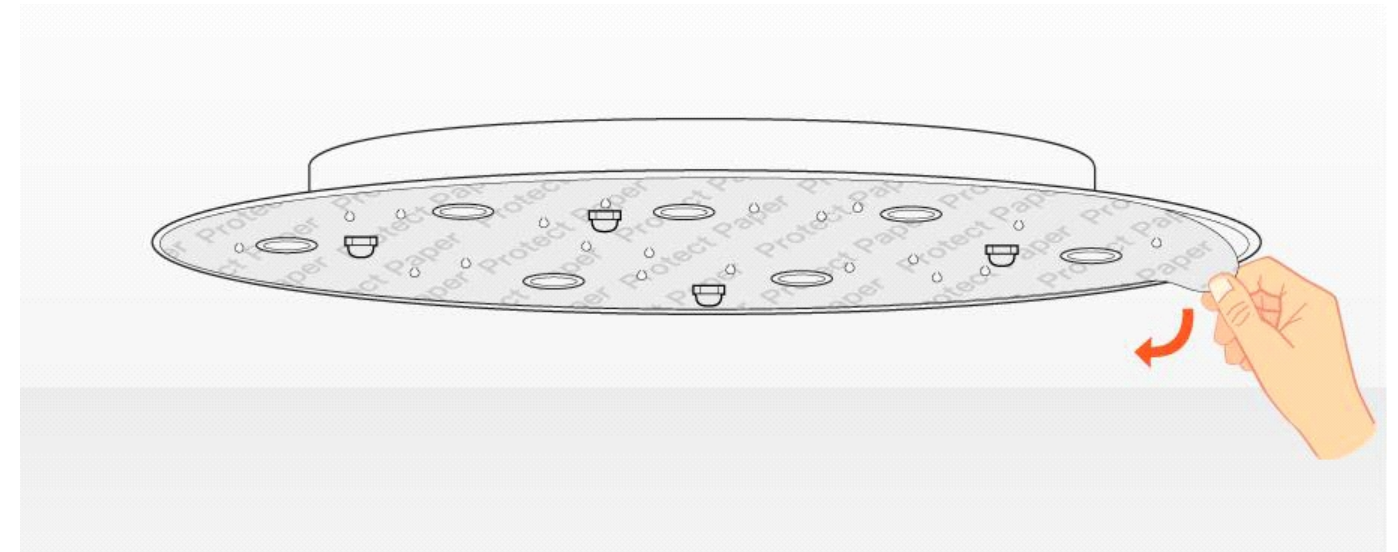

③ Please refer to the light bulb information provided for the product on the instruction or on our website to select the correct light bulb type. The product will require a specific type of light bulbs, like GU10. You can choose LED or halogen light bulbs based on your preference. You can also decide what kind of color temperature that you want for the light bulbs, like daylight or warm white. In addition, you can even choose different colors for the light bulbs, like blue, yellow or green. **If you need to replace the bulb, must remove the old bulb and transformer together.**

