


## Istruzioni per il montaggio Assembly instructions

L 34 cm - H 34 cm - Prof 21 cm W  
13 3/8" - Height 13 3/8" - Depth 8 1/4"



230V 50Hz IP 20

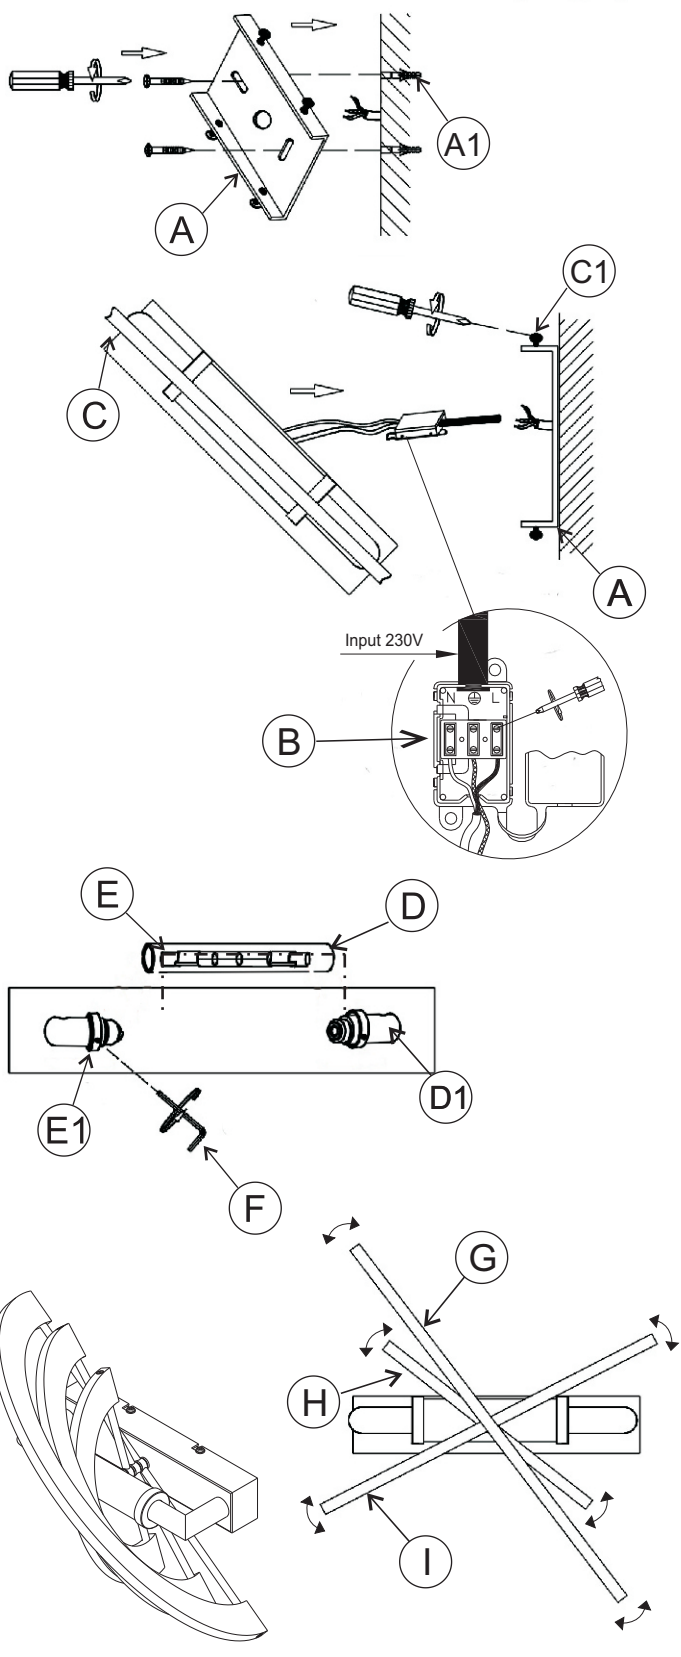

La sicurezza dell'apparecchio è garantita solo con l'uso appropriato delle seguenti istruzioni, pertanto è necessario conservarle.

1. Togliere la tensione di rete prima di procedere all'installazione.
2. Il collegamento elettrico va fatto eseguire esclusivamente da personale tecnico competente.
3. Fissare la staffa (A) al muro con le viti ed i tasselli ad espansione (A1).
4. Collegare i conduttori di alimentazione alla morsettiera in dotazione (B) rispettando le polarità indicate.

5. Fissare la montatura (C) alla staffa (A) con le viti (C1).
6. Svitare il grano della rondella (E1) con la chiave a brugola fornita (F) e spostarla di lato, quindi infilare prima il tubo pirex (E) poi la lampadina alogena (D) ed infine riposizionare la rondella (E1) in modo che il tubo pirex (E) rimanga bloccato, quindi riavvitare il grano sulla rondella (E1).  
\*\*\*Inserire la lampadina nel portalampada verificando la potenza massima riportata nella marcatura dell'apparecchio.

\* Non toccare il bulbo della lampadina (D) a mani nude, usare un panno.

### Lampadine consigliate:

1x150W R7s 78mm

7. Rimuovere la pellicola protettiva dagli archi (G), (H) ed (I).
  8. Gli archi (G), (H) ed (I) possono essere orientati.
- L'apparecchio è idoneo per essere montato su superfici normalmente incombustibili. Questo modello è destinato ad un utilizzo in ambienti asciutti. Per la pulizia usare un panno morbido e asciutto. Evitare prodotti contenenti solventi.

We only guarantee the safety of the fitting when it is used in accordance with these instructions. Keep them in a safe place for reference purposes.

1. Isolate the installation circuit from the electrical mains, before starting to install the light.
2. The installation must be carried out only by a qualified electrician.
3. Fix the crossbar (A) in the required position using screws and expansion plugs (A1).
4. Connect the power wires to the terminal block (B). Take care to respect the correct polarity.
5. Fix the structure (C), to the crossbar (A) using screws (C1).
6. Unscrew the grub screw of the ring (E1), using the allen key provided. Fit the pyrex tube (E) and the halogen bulb (D). \*\*\*Re-position the ring (E1) so that the pyrex tube (E) is firmly fixed in place. Tighten the grub screw of the ring (E1).

\*\*\* Check the maximum power rating of the bulb against the lamp maximum Watt label, to ensure that the bulb power is equal to or less than this figure.

\* Avoid touching the glass of bulb (D) during bulb installation.

### Recommended bulbs :

1x150W R7s 78mm

7. Remove protective film from arcs (G), (H) and (I).
8. Arcs (G), (H) and (I) can be adjusted.

This lamp is suitable for installation on combustible surfaces. It is only suitable for use in a dry interior location. Clean with a soft dry cloth. Do not use detergents containing solvents.

### ATTENZIONE

- Il produttore declina ogni responsabilità per danni causati da uno scorretto utilizzo o per la manomissione dell'apparecchio stesso.
- NON COPRIRE l'apparecchio con panni e/o quant'altro possa causare un eccessivo surriscaldamento.
- Per la sostituzione di componenti usurati rivolgersi a personale qualificato.
- Togliere la tensione di rete prima di sostituire la lampadina o comunque prima di ogni operazione di manutenzione.
- **Sostituzione lampadine:** spegnere la lampada per almeno 10 minuti prima di procedere alla sostituzione.

### WARNINGS

- Our company shall not be held responsible for any injury to persons, or for any damage to things, consequent on incorrect use of this lamp, or consequent on any unauthorised modification of, or tampering with, the same.
- NEVER cover the lamp. This will cause it to overheat and may cause a fire.
- Electrical repairs must be only carried out by a qualified electrician and no-one else.
- Isolate the lamp from the main supply before changing the bulb, or before any other maintenance operation.
- **Changing light bulbs:** allow the lamp to cool for 10 minutes before proceeding.