


Submitted Model No.: \_\_\_\_\_

Specific Features: \_

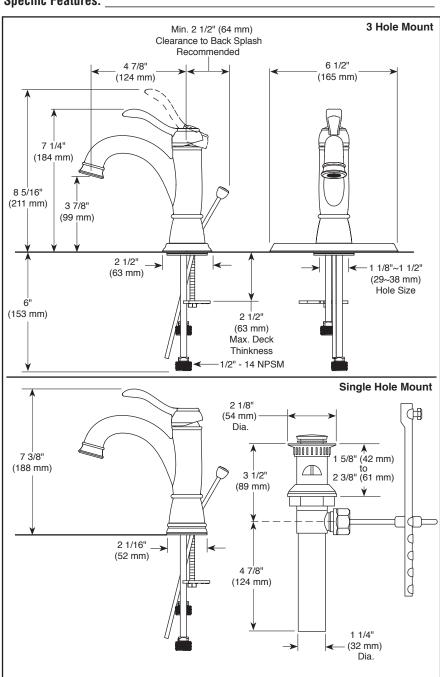

# ▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-L-15984LF Rev. D



see what Delta can do

# LAVATORY FAUCET

■ Single Handle Deck Mount

## **STANDARD SPECIFICATIONS:**

- Max. flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Max. flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa (ECO models only)
- Solid brass cast body
- One or three hole mount
- Centermount or 4" (102 mm) centers with optional 6 1/2" (165 mm) escutcheon
- Control mechanism is replaceable cartridge with ceramic plates.
- 1/2" 14 NPSM adapters
- Models have drain with pop-up type fitting with plated flange and stopper.

### **WARRANTY**

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



#### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2

Indicates company ICC / ANSI A117.1 Indicates compliance to

- EPA WaterSense<sup>®</sup>
- Verified compliant with 0.25% weighted average Pb content regulations

**Delta Faucet Company** 55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2019 Delta Faucet Company