

# One Piece Slipcover

\*Keep labels on during installation.




To remove wrinkles, tumble dry low with a damp towel.

- 1 LOCATE** the *Center Front of Cover, Arm, Tuck, Tuck Excess Fabric Behind Cushion, and Back* labels.


Keep these on during installation.




- 2 DRAPE** the cover over the furniture making sure that the center label is in the middle front of the seat cushion.

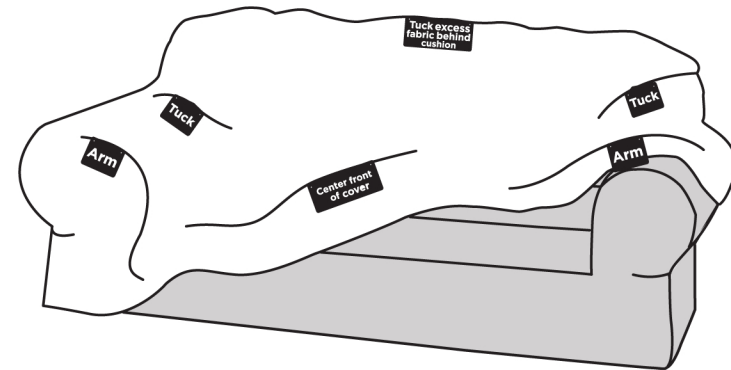

- 3 ADJUST** the slipcover arms to hug the arms of the furniture. Continue to pull the slipcover around the furniture until the bottom hem touches the floor.

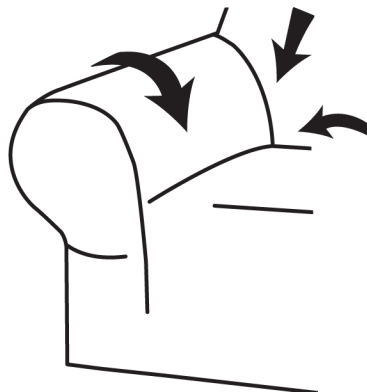

- 4 TUCK & SMOOTH** any excess fabric into the corners of the arm sides and the back of the cushions.

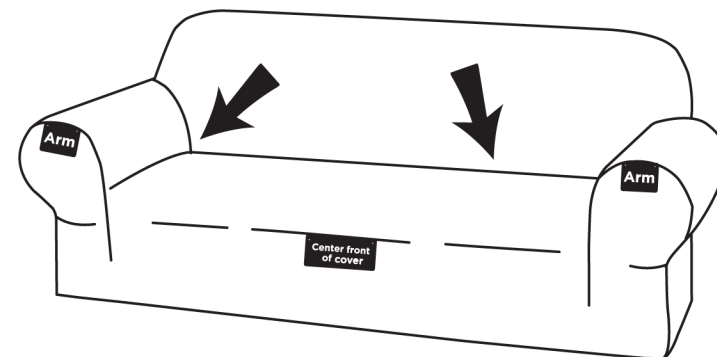

\*When installation is complete, use scissors to remove tags.