


Assembly Instructions

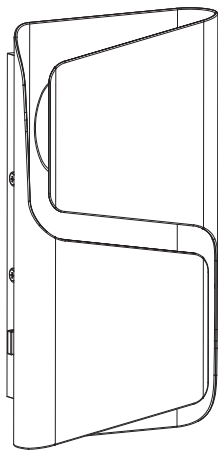


Outdoor wall sconce

Model No.
THCL-XQ0003

Contact Us

We're here to help you.

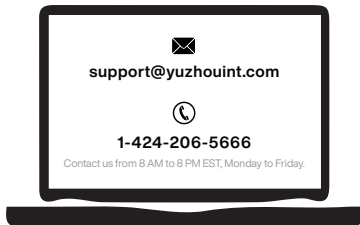

Your satisfaction is our top priority. If you encounter any issues with this product, such as missing or damaged parts, we're here to help. Please retain the original packaging and take photos of the packaging and the product, then contact us as soon as possible.

Warm Tips

1. Carefully read these instructions and keep them for future reference.
2. Check the parts list and confirm everything's there before starting assembly.
3. When assembling, put all parts on a soft, smooth surface like a carpet to avoid scratches.
4. Don't fully tighten screws until all parts are confirmed in place to avoid misalignment.

Warning:

Risk of fire. Min 75°C supply conductors. Consult a qualified electrician to ensure correct installation. Before installation, please turn off the main power of the circuit breaker to prevent possible electric shock.

Packing list

Part	Description	Quantity
1	LED Wall light	2pcs
2	Wire Connectors	6pcs
3	Self Tapping Screw	8pcs
4	Plastic Anchor	8pcs
5	Mounting Screw for J-BOX	4pcs
6	Mounting Plate	2pcs
7	Instruction Manual	1pc

Specifications


- Input Voltage: 120-277VAC , 60Hz
- LED light: 18W, 500Lm, 3CCT (3000K/4000K/5000K)
- CRI: ≥90
- Function : 120V TRIAC Dimming (Dimming range : 10%-100%)
With a built-in photocell sensor .
- Material: aluminium, PC
- Dimensions: 12.01"(H) x 6.38"(W) x 2.84"(D)

Installation Instructions

Wall Mounting

1. Remove the mounting plate.
2. Drill two holes in the proper location.
3. Tap the plastic anchors into the holes.
4. Align the holes on the mounting plate with two plastic anchors.
5. Tighten the mounting plate to the plastic anchors with the anchor screws.


6. Connect the fixture wires to the main power cord with the wire nuts. Make sure that the wires are connected correctly: black wire to live wire; white wire to neutral wire; ground wire to ground wire. Wrap the ground wire around the screw on the mounting plate, then secure the screw to the mounting plate.
7. Secure the fixture to the mounting plate and tighten the canopy screws on both sides. Make sure that the fixture is perfectly fixed and that the wires are not pinched between the mounting plate and the fixture.

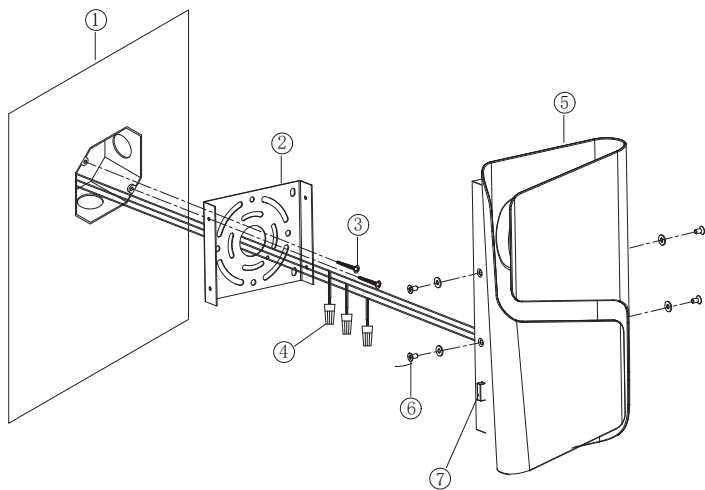

J-Box Mounting

1. Remove the mounting plate.
2. Install the mounting plate to the junction box (not included) with the J-box screws. Make sure that the internal wires from the junction box (not included) are pulled through the center hole of the mounting plate.

3. Connect the fixture wires to the internal wires from the junction (not included) with the wire nuts. Make sure that the wires are connected correctly: black wire to live wire; white wire to neutral wire; ground wire to ground wire. Wrap the ground wire around the screw on the mounting plate, then secure the screw to the mounting plate.
4. Secure the fixture to the mounting plate and tighten the canopy screws on both sides. Make sure that the fixture is perfectly fixed and that the wires are not pinched between the mounting plate and the fixture.

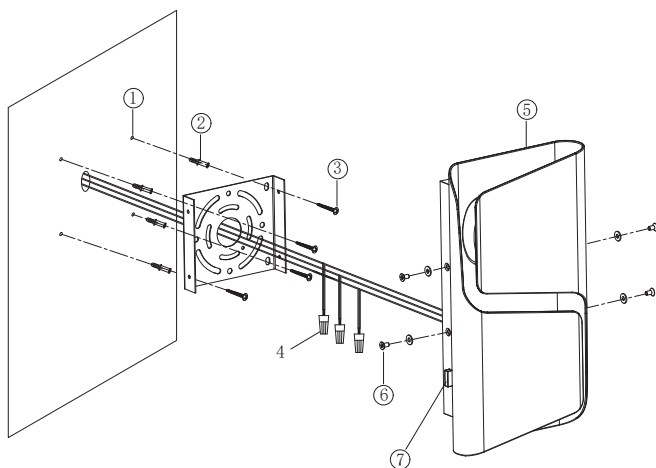

NOTE:

To ensure waterproofing, please fill Sealant or Glue in all gaps where the wall and lighting fixtures are attached after fixing the light.

List of compatible dimmers

Brand	Model number
Lutron	DVCL-153PR (15%)
	MACL-153MLH-WH (10%)
	P-PKG1W-WH-R (7.5%)
	STCL-153PH-WH (5%)
Leviton	R11-DSL06-1TW (15%)
	R00-RNL06-0TW (10%)
	R02-DW6HD-2RW (5%)
	R68-06674-P0T (2.5%)
Legrand	RHCL453PNICCV4 (10%)
TP-link	HS220 (5%)
Commercial Electric	HPDA311CWB (15%)

One Year Limited Warranty

Supported by our professional R&D team and QC team, we provide One Year Warranty for materials and workmanship from the purchase date. Please note that the warranty does not cover damage caused by personal misuse or improper installation. Please attach your Order ID and Name so that our dedicated customer service team can help you better.



Made in China

Thank you for your support!

