




LED Linear Pendant Light (Direct Downlighting)

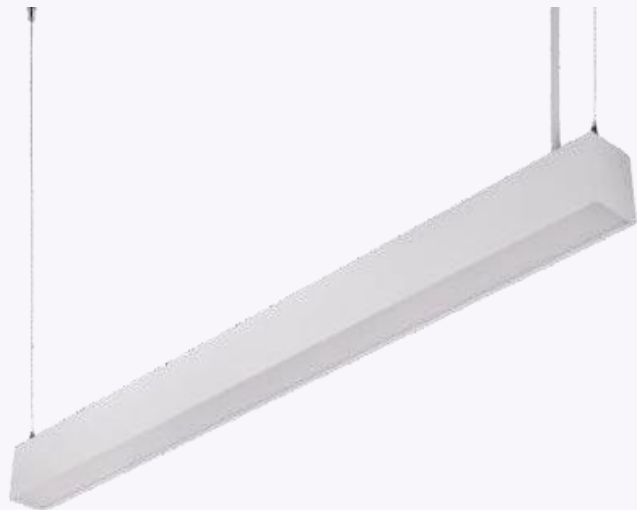

The LED Linear Pendant Light delivers efficient direct downlighting for offices, retail stores, schools, and other commercial spaces. Featuring selectable CCT, 0–10V dimming, a 100° beam angle, and adjustable suspension cables, it offers flexible lighting and easy installation. The white aluminum housing supports efficient heat dissipation, while the linkable design allows multiple fixtures to be connected. Suitable for damp locations, it provides CRI 80+ and over 50,000 hours of rated life.

Specifications



Length	Watt	CCT	Lumens	Finish	Dimmable	Voltage	DLC #
2ft	25W	3000K/4000K /5000K	3250 lm	White	0-10V	120-277V	S-JJSCX2
4ft	50W	3000K/4000K /5000K	6500 lm	White	0-10V	120-277V	S-V0W5Z3

Dimensions

Linear

2ft/4ft/8ft Front View


Side View

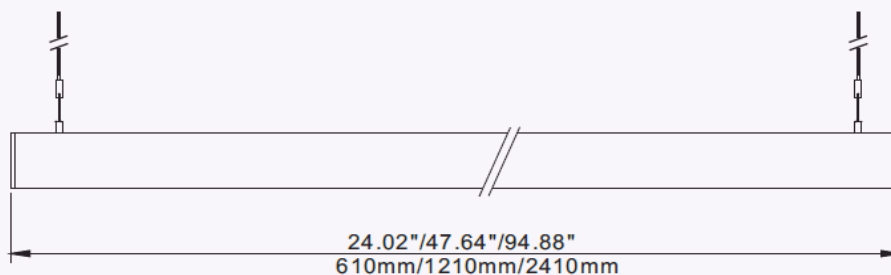




LED Linear Pendant Light (Direct Downlighting)

Connection Installation

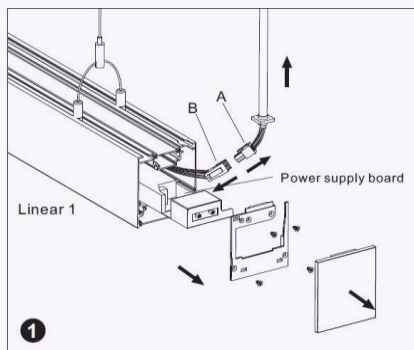


1. Install the Linear 1 to the ceiling as instruction of Suspension Installation. Open the end cap as the picture shows. Pull out 1/2 Power supply board of Linear1, and move out the AC wires. Disconnect the A and B parts.

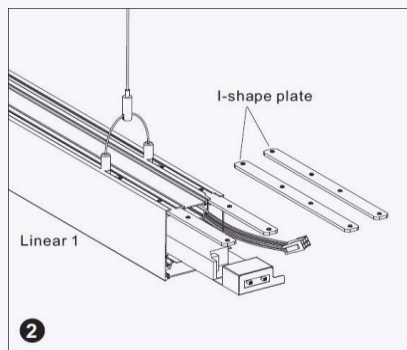

2. Insert the I-shape plate to the track as the picture shows.


Install the Linear Light as above method, keep one main input cord on one side.







NOTE: LED LINEAR CAN BE JOINTED TOGETHER AS NEEDED, BUT THE TOTAL NUMBER OF FIXTURES SHOULD BE NOT MORE THAN 7PCS (INCLUDING 7PCS) If you order to use 18# cord, More Links can be Customized.

CCT Adjustable

Open the end cap the side With AC wire as the picture shows. Moving the Dip to choose the CCT or you want as the label shows.

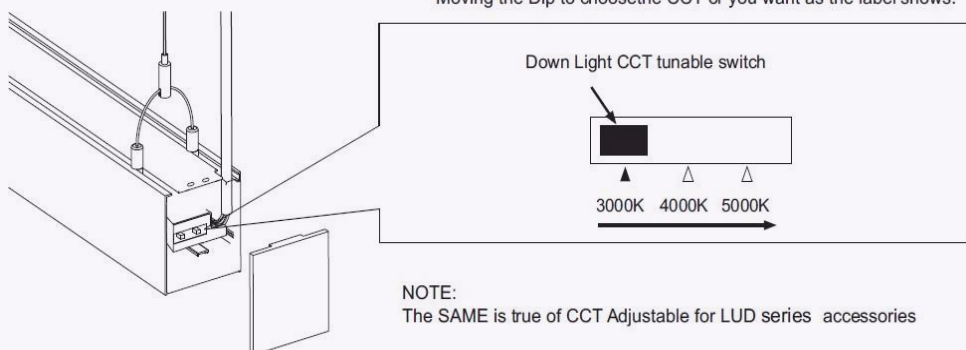

Surface Mount Installation

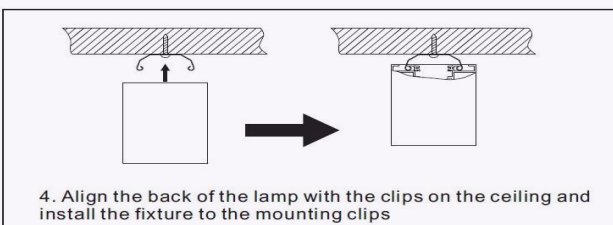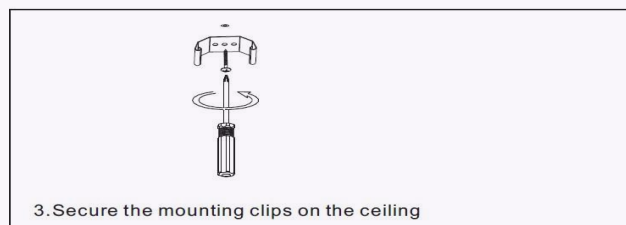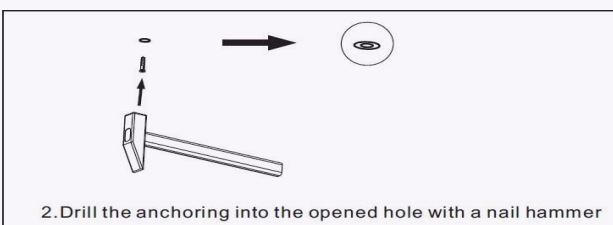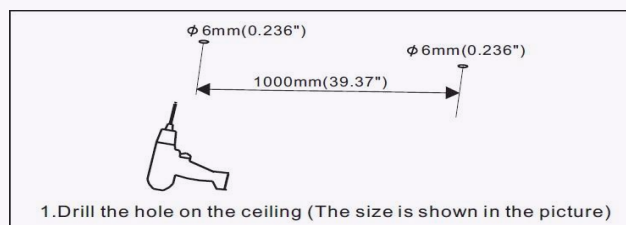



LED Linear Pendant Light (Direct Downlighting)

Suspension Installation

1

Drill a hole of 5.0mm in diameter as shown in the figure at the location required for installation. Then hammer the plastic anchor into the hole.

2

M type mounting bracket

Insert PA4X35 screws into the M type mounting bracket and then drill into the plastic anchor.

3

Rotate and fasten 2 fixing heads and 2 screws of left end; hold steel wire rope and lift lamp upward, then adjust balance screws to balance light, finally tighten balance screws.

4

Cable protective covert

Nex Nut

Wire Clamp

Insert the wire clamp into the middle hole of the disc and tighten the wire clamp with hex nut; Clip the cable protective cover into the AC line hole of the disc.

5

Grey/0-10v DIM+
Purple/0-10v DIM-
Green/Earth
White/Neutral
Black/Live

Press the wire clamp as shown in the figure, and then insert the stainless steel wire into the inner hole of the wire clamp; The mounting height of the lamp could be adjusted by this wire clamp.
Insert the AC input cable through the cable protective cover and connect it with the AC line by the corresponding connection wire with L, N, GND.
Adjust the length of the AC input cable, align the side holes of the disc and the mounting bracket as shown in the figure, then tighten the screw.
The installation is completed.

Surface Mount Installation

1

1. Drill the hole on the ceiling (The size is shown in the picture)

2

2. Drill the anchoring into the opened hole with a nail hammer

3

3. Secure the mounting clips on the ceiling

4

4. Align the back of the lamp with the clips on the ceiling and install the fixture to the mounting clips