

READ& SAVE THESE INSTRUCTIONS

INSTALLATION OPERATION INSTRUCTIONS

TOOLS & MATERIALS REQUIRED

- Blade screw driver
- Adjustable wrench
- Step ladder
- Wire cutter
- Wiring supplies as required by electrical code

CAUTION :before assembling your lighting fixture, refer to the section titled ELECTRICAL CONNECTIONS. If you feel you do not have electrical wiring experience, refer to a do-it yourself wiring handbook Or have your fixture installed by a qualified licensed electrician.

GENERAL

- 1.To ensure the success of the installation, be sure to read these instruction review the diagrams thoroughly before beginning
- 2.All electrical connection must be in accordance with local codes, Ordinances, or the National Electrical Code. If you are un-familiar with methods of installing electrical wiring, secure the services of a qualified licensed electrician.
- 3.These fixtures are intended to be mounted to a 4"x2 1/8" deep metal octagon outlet box, the box must directly supported by the building structure.
- 4.Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. turning the power off using the light switch is not sufficient to prevent electrical shock.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur, It must be understood that common sense, caution, and care are factory which cannot be built into any product. These factories must be supplied by the persons caring for and operating the fixture

UNPACK THE FIXTURE

Check the contents of the box, You should receive

- Mounting hardware package
- Lampholder assembly(s)
- Mounting bracket
- Shade(s)-not provided on all models
- Shade attachment screws(3 for each shade)not provided on all models

PREPARE THE FIXTURE

NOTE: FIRST TURN OFF ELECTRICITY

- 1.If you are replacing an existing fixture, disconnect and remove the old fixture, Expose the supply wiring from the outlet box.
- 2.Some fixtures are provided with a threaded nipple or machine screws for attaching the fixture to the mounting bracket, If your fixture is supplied with a threaded nipple, screw the nipple 3 complete turns into the mounting bracket and lock into place with a hexagon lock. If your fixture is supplied with machine screws, thread the machine screws into the opposite side of the mounting bracket from the green ground screw. Look the

machine screws into place with lock nuts. EXCEPTION :Ceiling mounted fixture with keyhole slots should have machine screws entering mounting bracket from same side as green grounding screw (see Fig. 2A)

- 3.Fasten the mounting bracket to the outlet box using the two screws supplied with the outlet box. If your fixture is supplied with a channel shape mounting bracket with keyhole slots for attachment to the mounting surface (See Fig 3), it will be necessary to mark the location of the keyhole slots on the mounting surface and drill holes for fasteners(not provided) Use fasteners suitable for the mounting surface, the narrow end of the keyhole slot should face up.
- 4.Attach grounding wire(green or bare copper)from the supply circuit to the mounting bracket with the green grounding attachment screw provided. Some models have a grounding wire attached to the fixture. For models that employ a green or bare copper grounding Wire, it will be necessary to connect the green or bare grounding wire to the grounding conductor of the supply circuit. Attach all grounding conductors to the mounting bracket with the green grounding attachment screw.
- 5.Make electrical connections-SEE BELOW.




ELECTRICAL CONNECTIONS

To make electrical connections:

Connect the white wires from the fixture to the white wire of the supply circuit. Connect the black wires from the fixture to the black wire of the supply circuit. Connect the green or bare copper colored wire to the grounding conductor of the supply circuit. If your fixture is supplied with an SPT Cord connect the half of the SPT Cord that is ribbed surface to the white wire of the supply circuit. Connect the smooth half of the wire(the half with mark-connectors suitable for the size type, and number of conductors. No loose stands or loose wires should be present. Secure wire connectors with U.L listed electrical tape)

FINAL ASSEMBLY

- 1.Spread the electrical splices so that the black wires are side of the outlet box and the white wires are on the other side.
- 2.Place fixture against mounting surface allowing the threaded nipple or machine screws to pass through the cover plate. Secure with mounting Nut or acorn nuts. For fixture with channel shape mounting bracket, place the cover plate over the channel and secure with screws provided.
- 3.If applicable, Place candle cover(s) over lamp holders before installing bulbs. Install the light bulbs(not provided) CAUTION: Refer to there lamping label located near the lamp holder for recommended maximum wattage-do not exceed recommended wattage
- 4.If applicable, attach shades to fixture, Some shades require the use of shade attachment screws, Do not over tighten these screws-too much pressure could cause glass breakage. See Fig 4 for replacement of fabric spacer, not supplied on all models.
- 5.outdoor wall fixture must be caulked with suitable RTV or silicone compound around the top and sides of the cover plate to reduce the chance of water intruding into the silicone area. Leave the bottom clear to allow moisture a means of escape.
- 6.Restore electricity and check the operation of your new lighting fixture

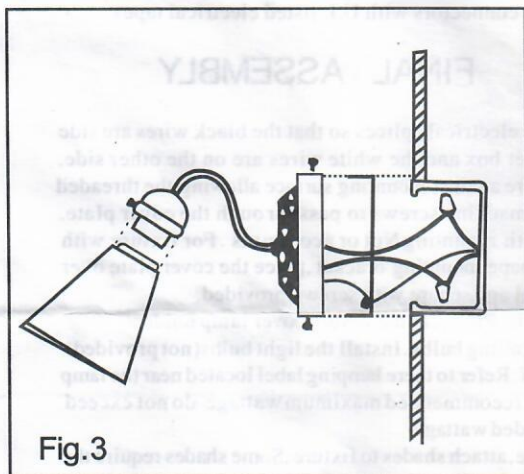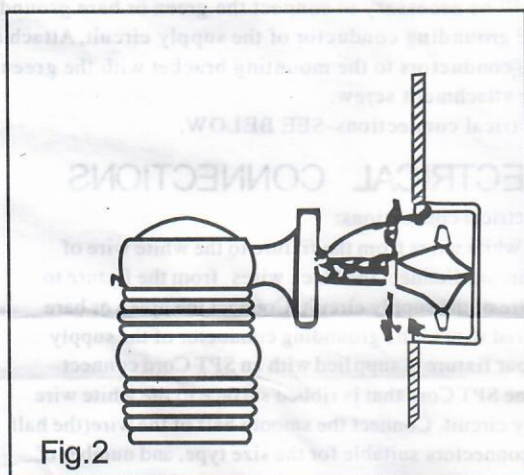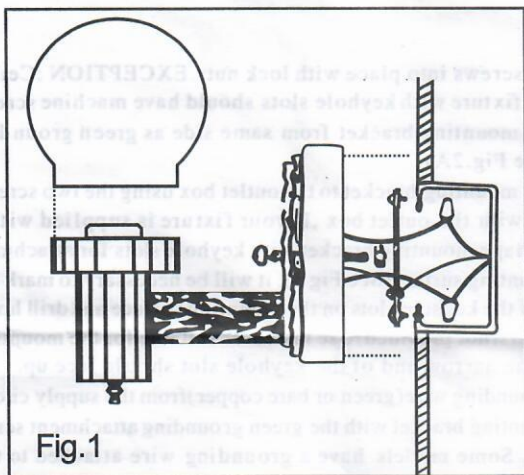

NOTE: the above diagram illustrates the installation of your new lighting fixture. This is a schematic drawing and is not intended to match the style of your fixture

