


Sidetable


CTG058 | 3 Drawers

Assembly Instructions

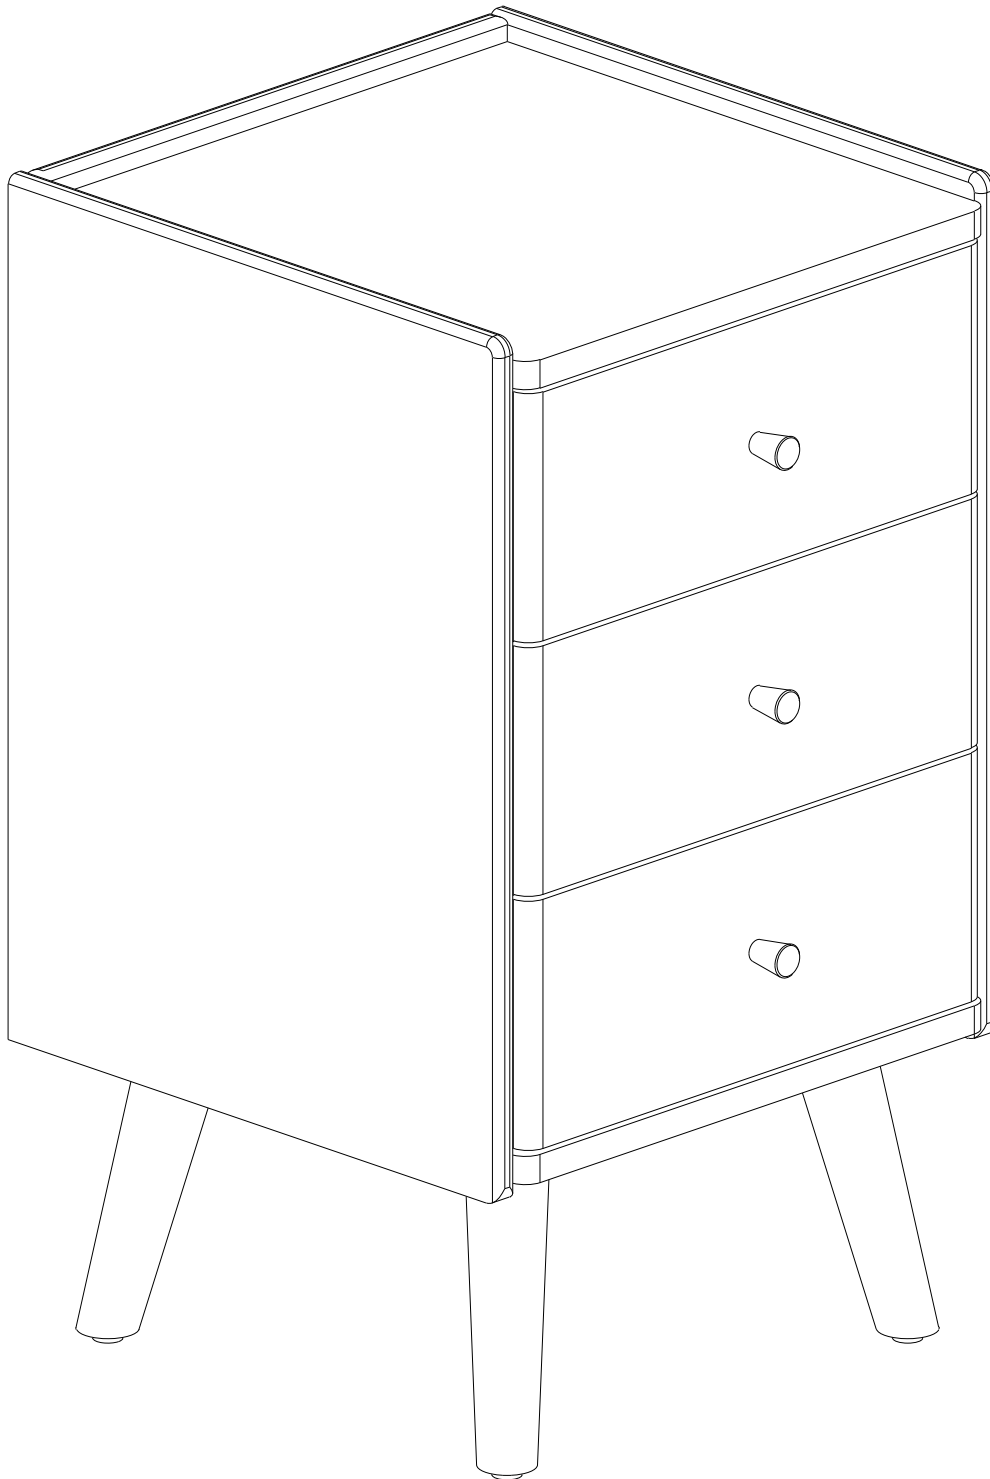


Assembly Diagram

CTG058 | 3 Drawers

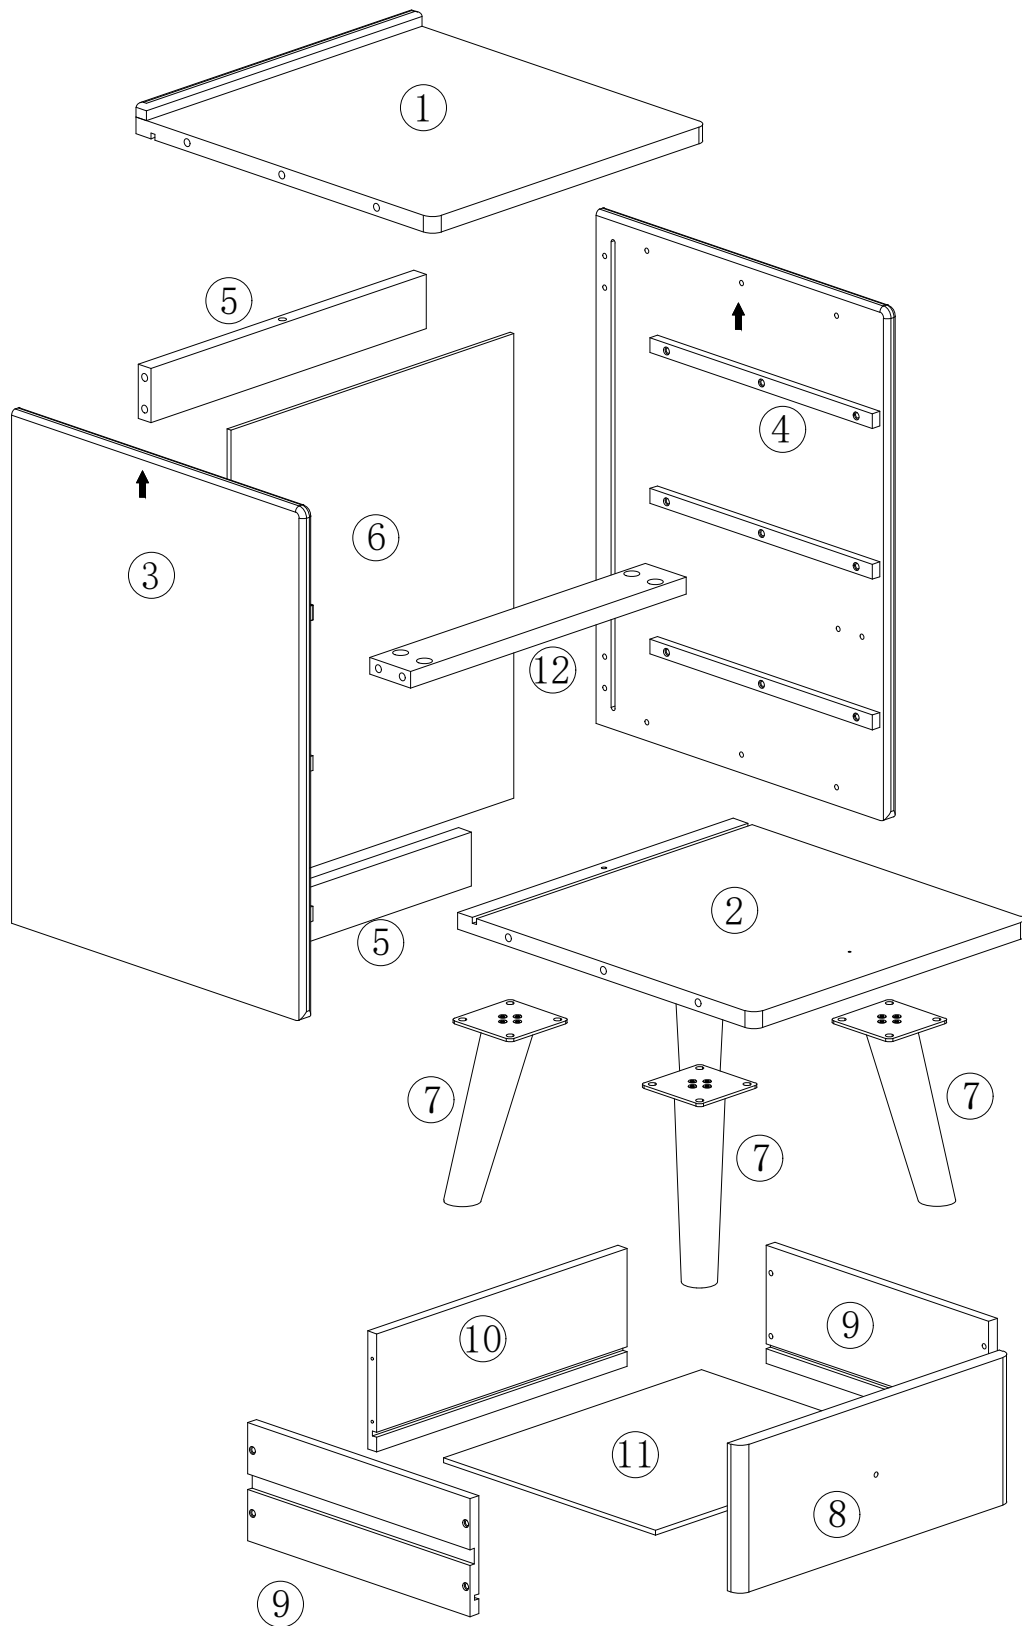


Parts List

CTG058 | 3 Drawers




1 Top panel

Quantity: 1



2 Base panel


Quantity: 1



3 Left side panel

Quantity: 1

Slides preinstalled




4 Right side panel

Quantity: 1

Slides preinstalled


Parts List

CTG058 | 3 Drawers




5 Upper / lower rear crossbar

Quantity: 2




6 Back panel

Quantity: 1



7 Leg

Quantity: 4




8 Drawer front assembly

Quantity: 3

Parts List

CTG058 | 3 Drawers



9 Drawer side


Quantity: 6

Slides preinstalled




10 Drawer back

Quantity: 3



11 Drawer bottom

Quantity: 3




12 Middle drawer crossbar

Quantity: 1

Hardware & Tools


CTG058 | 3 Drawers



A Cam bolts

L=40MM


Quantity: 26 + 2



B Cam locks

Ø15 × 11MM


Quantity: 26 + 2



C Screws

#8 × 30MM

Quantity: 24 + 2




D Drawer retaining clips

L=50MM

Quantity: 3

Hardware & Tools


CTG058 | 3 Drawers



E Wood screws

#3.5 × 15MM

Quantity: 3




F Ratchet screwdriver

M6 × 136MM

Quantity: 1


Reusable tool



G Cover stickers

Ø20MM

Quantity: 10 + 1




H Tip restraint kit

Quantity: 1

Includes screws and wall plugs

Hardware & Tools


CTG058 | 3 Drawers



I Nonwoven pads

Ø30 × 3MM


Quantity: 4



J Tapered handles

Ø20 × 23MM


Quantity: 3



K Phillips screws

M4 × 32MM

Quantity: 3




L Hex socket bolts

M6 × 15MM

Quantity: 16 + 2

Hardware & Tools


CTG058 | 3 Drawers



M Flat washers

M6 × 13MM

Quantity: 16 + 2



N Hex key

M4 × 100MM


Quantity: 1

Reusable tool

Ratchet Screwdriver

CTG058 | 3 Drawers

1. Manual operation setting
2. Ratchet setting
3. Reverse ratchet setting
4. Press-fit, removable and telescoping bits.

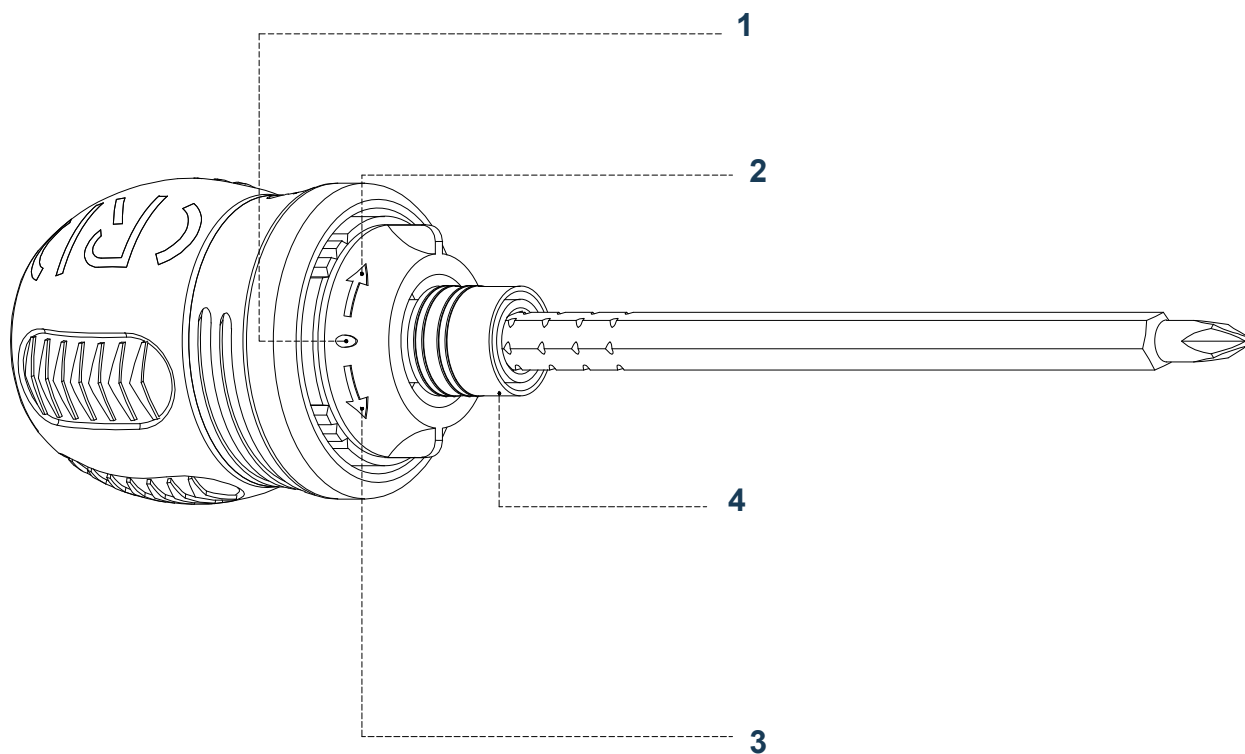

Safety Warnings

CTG058 | 3 Drawers

Place the unit on a level surface, or level it with the included

hardware when applicable.

Do not sit or stand on the product. Do not allow children to climb, sit or stand on it.

For safety, the unit must be secured to the wall.

Do not use the unit without installing the tip restraint.

The unit can tip over and cause severe injury or death.

Do not exceed the recommended weight limits.


Distribute weight evenly on each level. Keep heavier loads at the bottom.

Before cutting, drilling or hammering into a wall or floor, check for electrical wiring, plumbing and gas lines. Cutting into them can cause serious injury.


Cam Lock Assembly

CTG058 | 3 Drawers


Illustration key: A = cam bolt; B = cam lock.




1. Screw the cam bolt into the panel.




2. Insert the cam lock with its arrow pointing toward the panel edge.



3. Align the cam bolt and cam lock.
Insert fully into the cross-bored hole.



4. Turn the cam lock clockwise
190°–230° to lock the panels.



5. Check that the panels fit tightly
and the connection is rigid.

Generic Fitting Reference

CTG058 | 3 Drawers





Follow the insertion depths shown for the connector types illustrated.

Illustration labels A and C are generic reference labels.

Use the model-specific parts and hardware lists for assembly.

For a wood dowel, insert it at least halfway.

If necessary, tap gently with a rubber mallet.

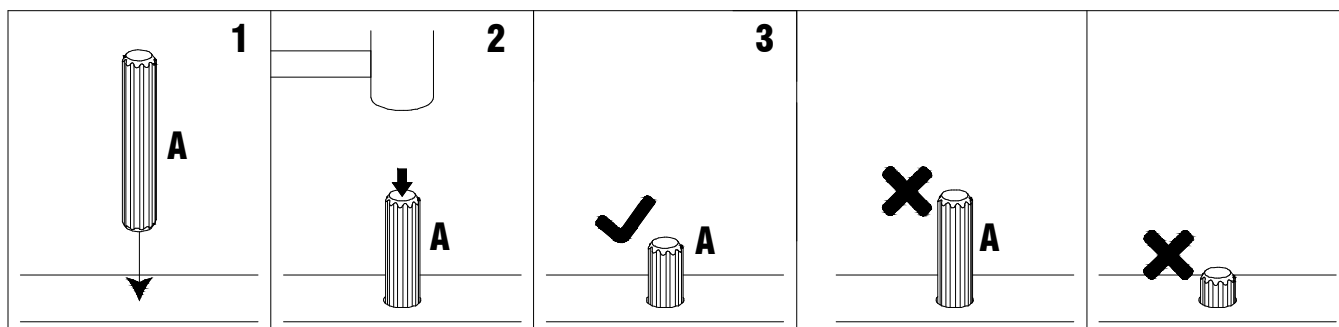

Before Assembly


CTG058 | 3 Drawers

Check all parts against the parts and hardware lists before assembly.


Use the correct screws to avoid splitting or damaging the panels.

The cabinet and drawer slides shown are preinstalled.


Tools F and N are reused throughout assembly.

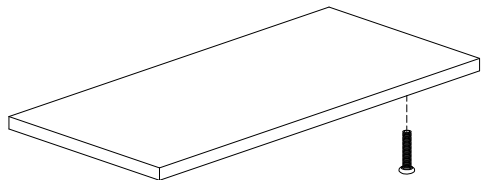

Example



Incorrect: oversized screw




Correct: matching screw

Step 1

CTG058 | 3 Drawers

Install Cam Bolts A in Parts 1, 2, 3 and 4 using Tool F.

Hardware: A × 26 Tool: F (reuse)




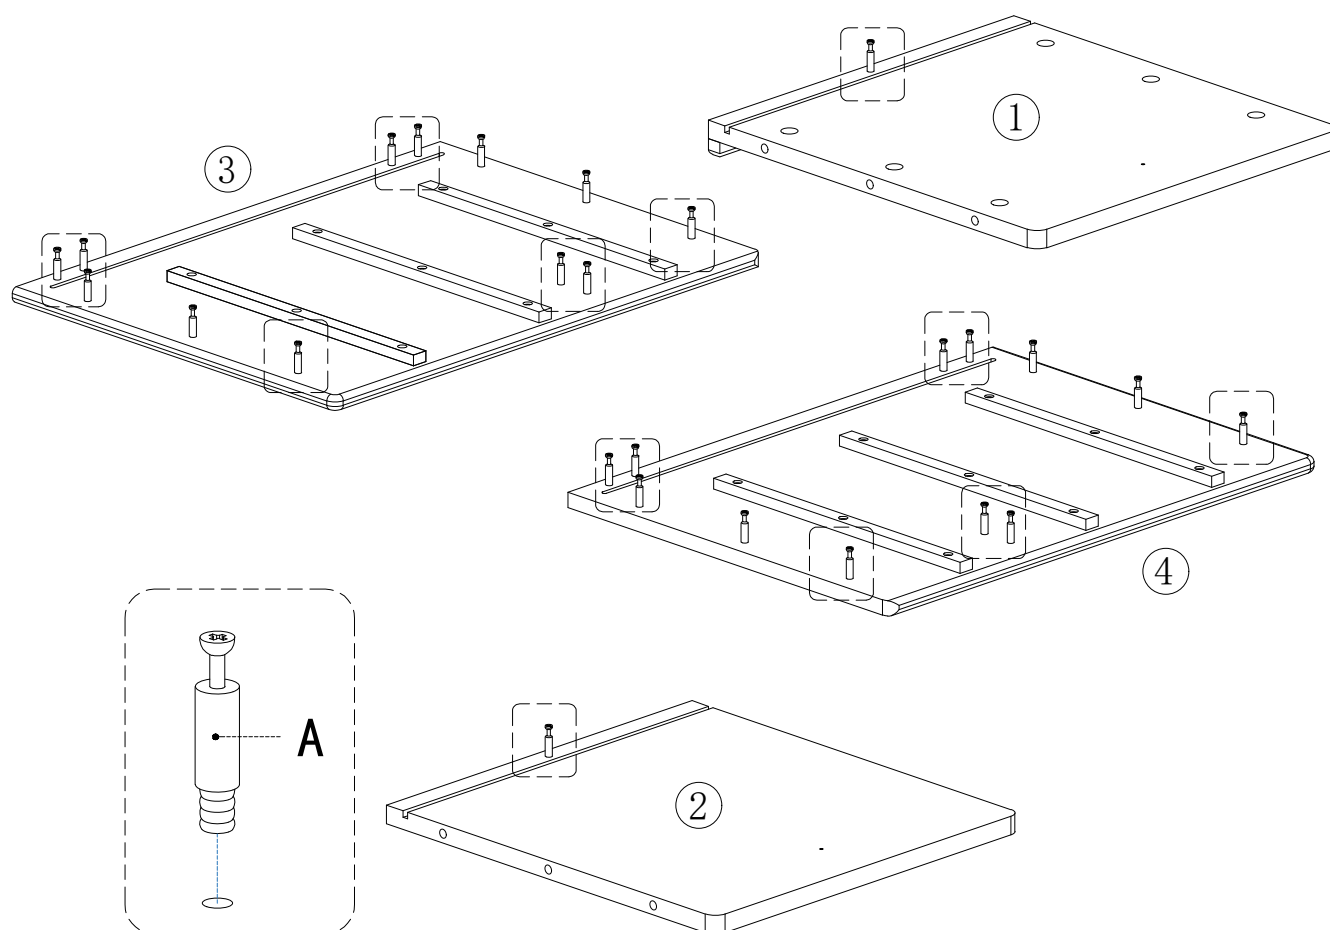


Step 2

CTG058 | 3 Drawers

Attach one Retaining Clip D to each of Parts 1, 2 and 12 using Screw E.

Hardware: D × 3 E × 3 Tool: F (reuse)

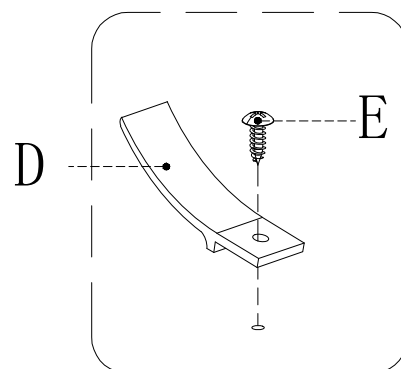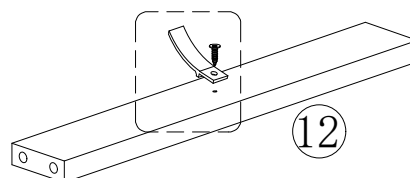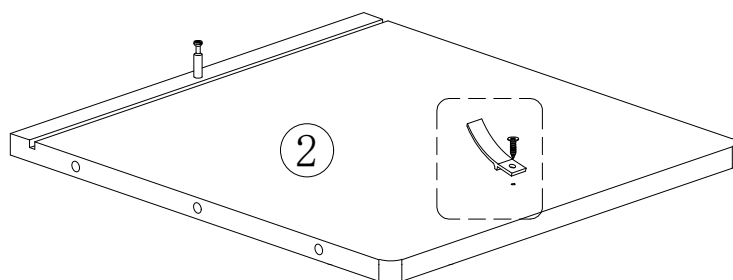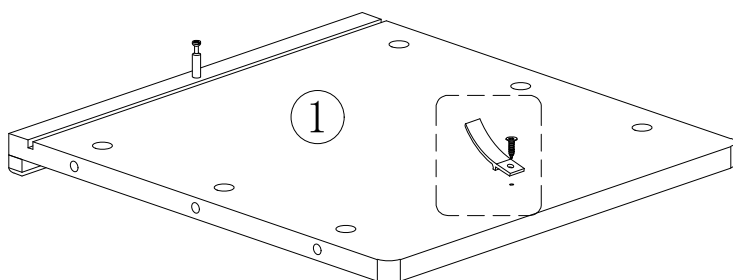




Step 3

CTG058 | 3 Drawers

Attach one Crossbar 5 to Top Panel 1 and the other to Base Panel 2.

Use Cam Locks B and Tool F.

Hardware: B × 2 Tool: F (reuse)

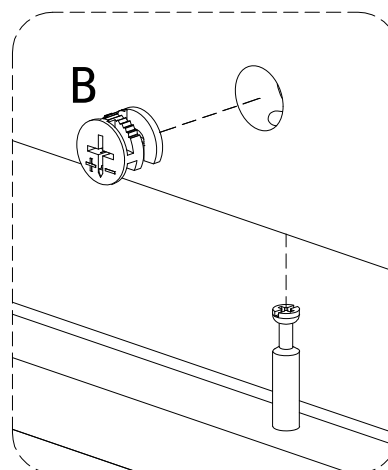
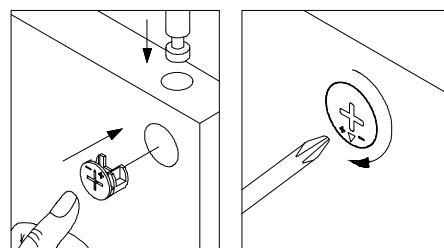
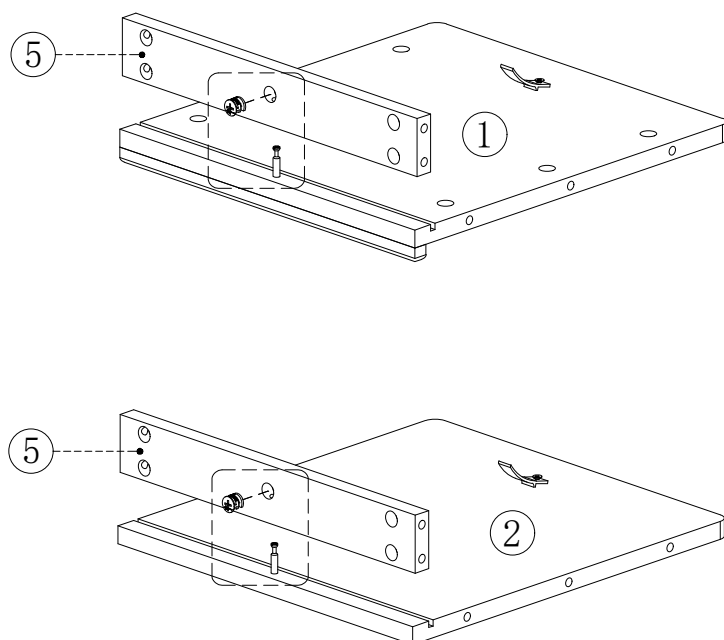


Step 4

CTG058 | 3 Drawers

Attach the top assembly from Step 3 and Crossbar 12 to Panel 4 using Cam Locks B and Tool F. Keep the upward marks as shown.

Hardware: B × 7 Tool: F (reuse)

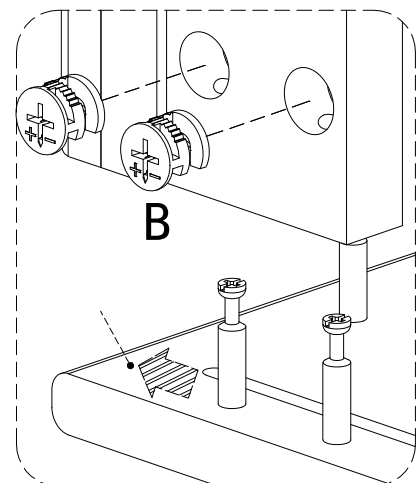
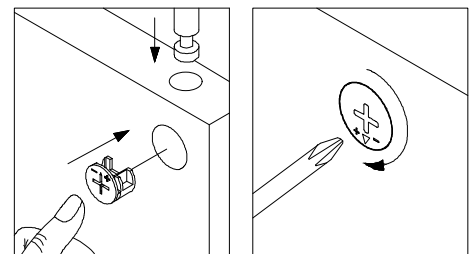
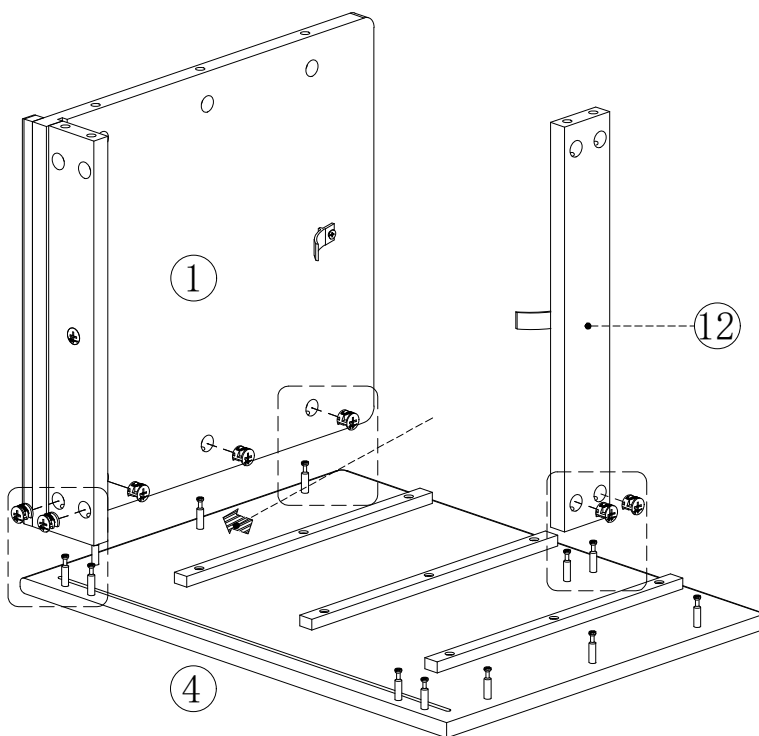


Step 5

CTG058 | 3 Drawers

Attach the base assembly from Step 3 to the assembly from Step 4 using Cam Locks B and Tool F.


Hardware: B × 5 Tool: F (reuse)

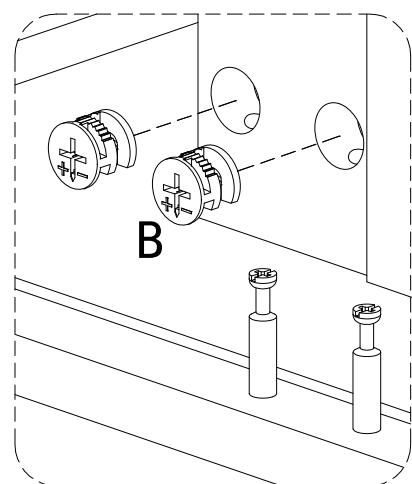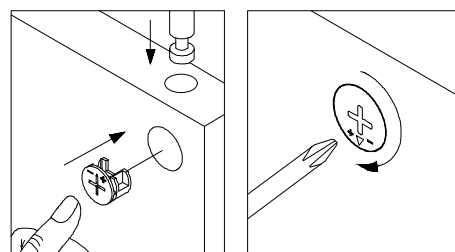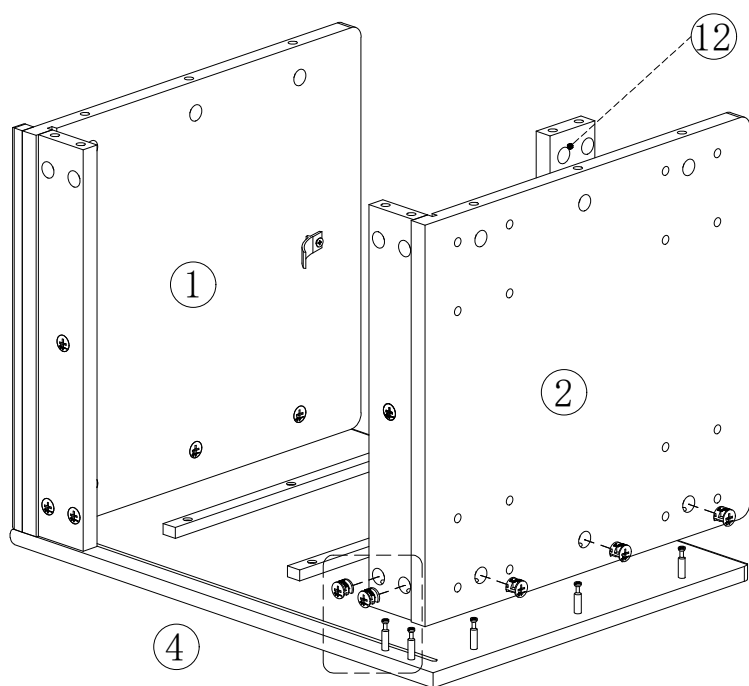

Step 6

CTG058 | 3 Drawers

Slide Back Panel 6 into the grooves of the assembly from Step 5.



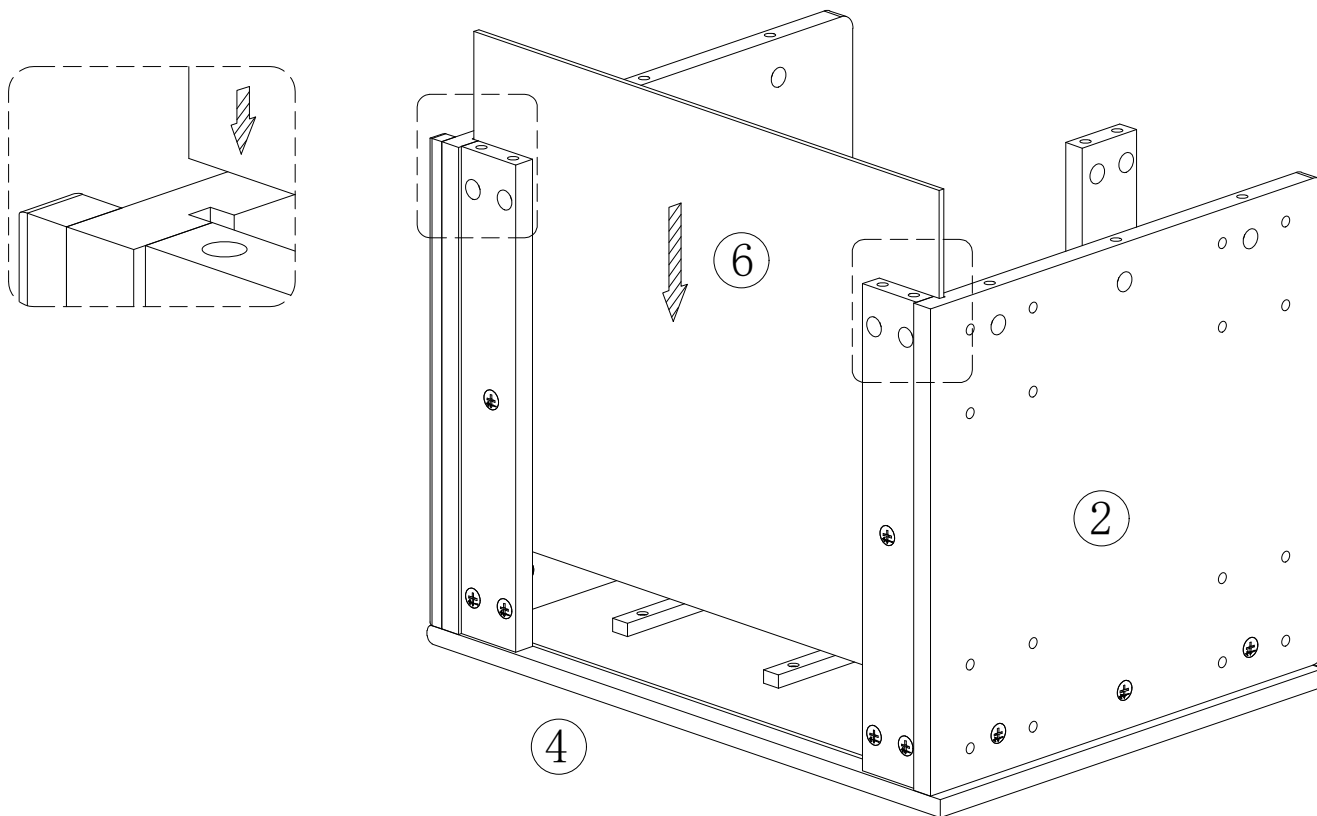


Step 7

CTG058 | 3 Drawers

Attach Left Side Panel 3 to the assembly from Step 6 using Cam Locks B and Tool F.

Hardware: B × 12 Tool: F (reuse)

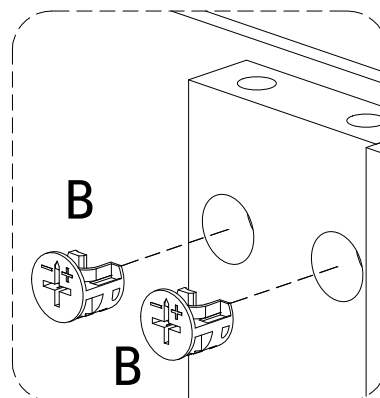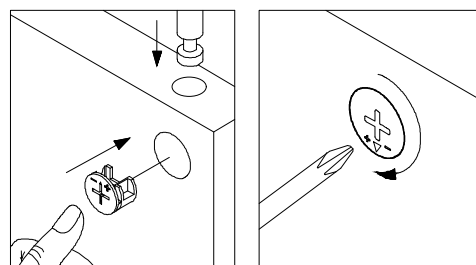
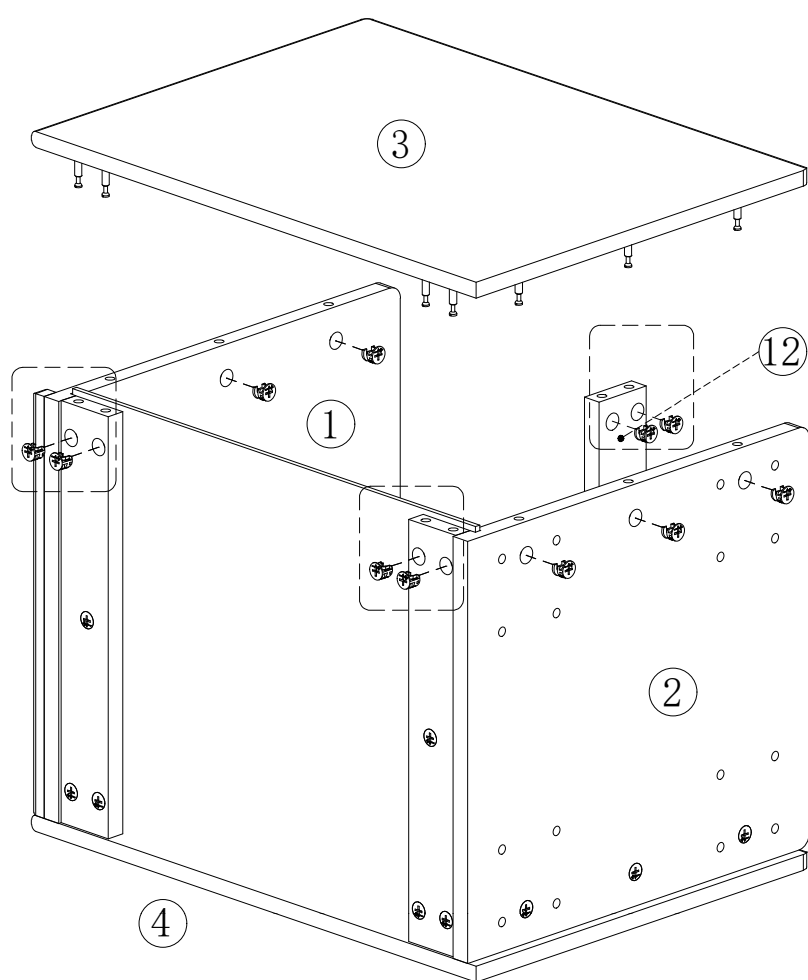


Step 8

CTG058 | 3 Drawers

Apply Cover Stickers G to the ten indicated holes.

Hardware: G × 10

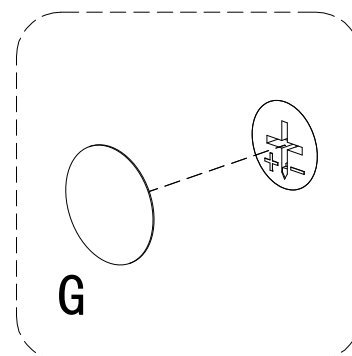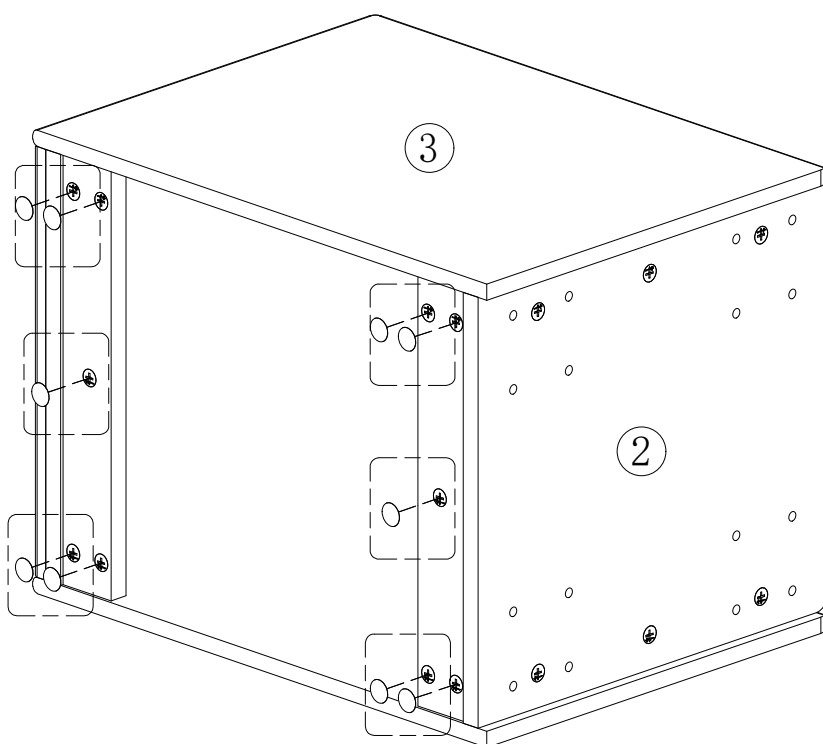




Step 9

CTG058 | 3 Drawers

Attach all four Legs 7 using Bolts L, Washers M and Hex Key N.

Follow the outward-facing leg orientation shown in the detail.

Hardware: L × 16 M × 16 Tool: N (reuse)

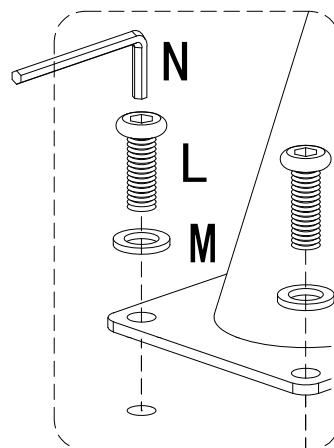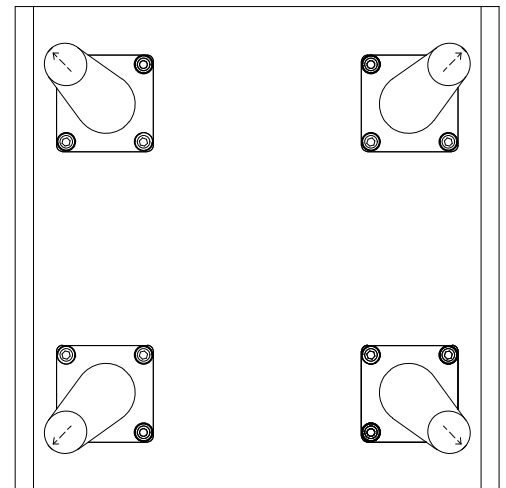
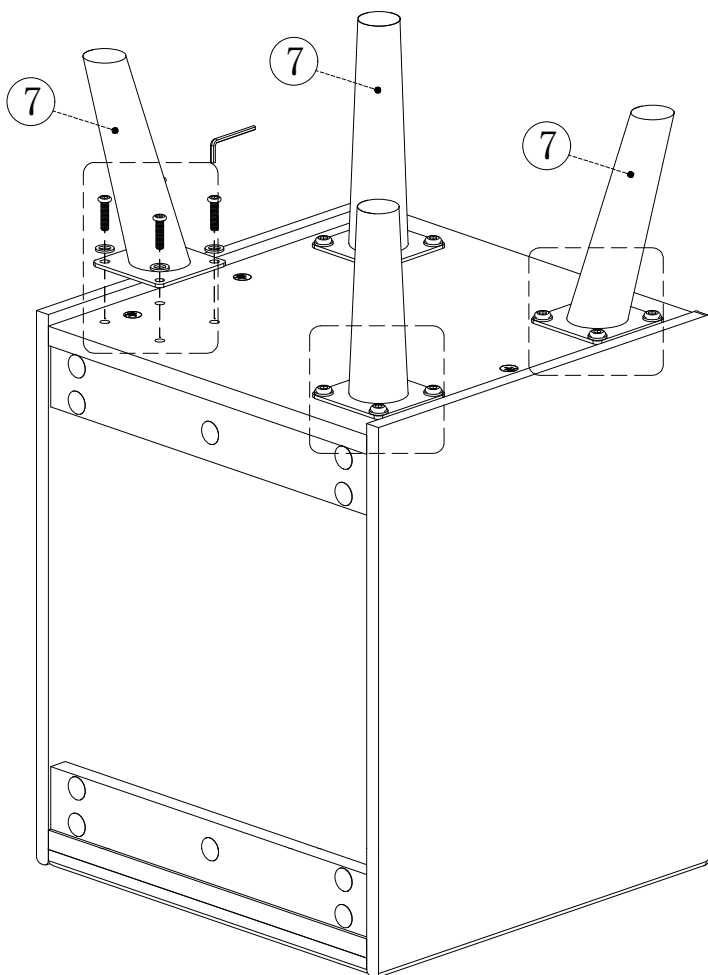


Step 10

CTG058 | 3 Drawers

Apply one Nonwoven Pad I to the bottom of each Leg 7.

Hardware: I × 4

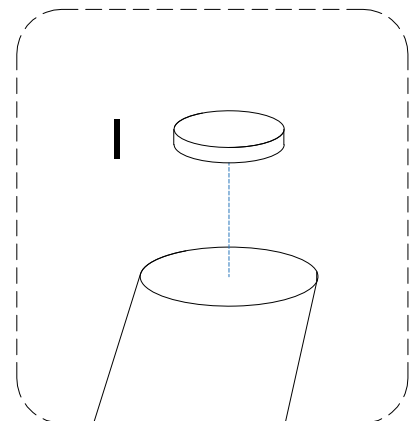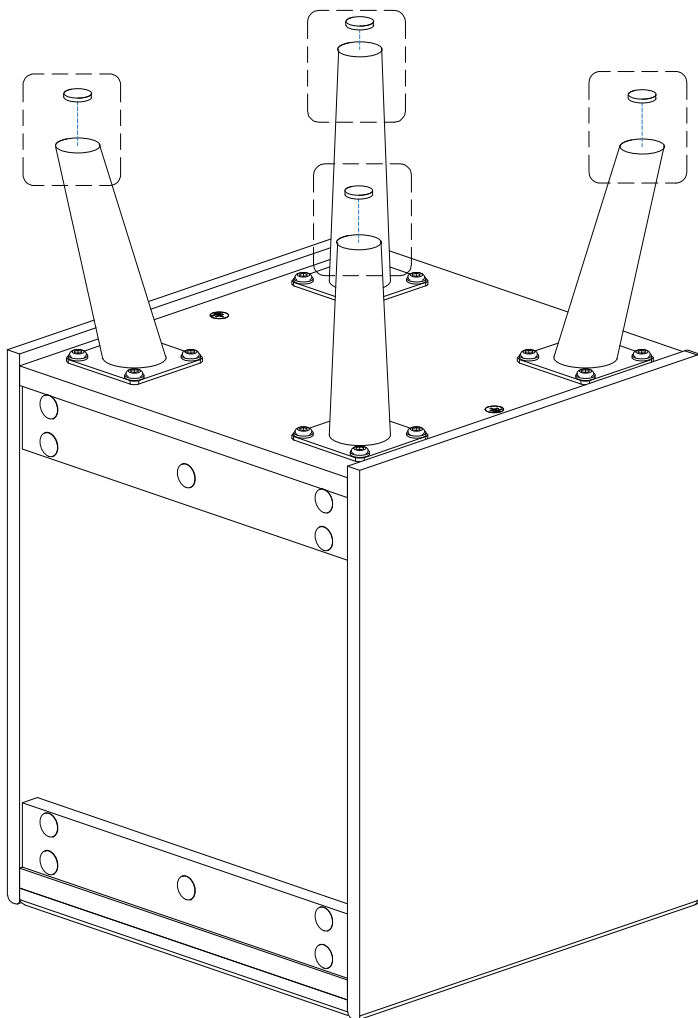


Step 11

CTG058 | 3 Drawers

Attach two Drawer Sides 9 to each Drawer Front Assembly 8 using Screws C and Tool F. Make three identical drawers.


Hardware for all three drawers: C × 12 Tool: F (reuse)

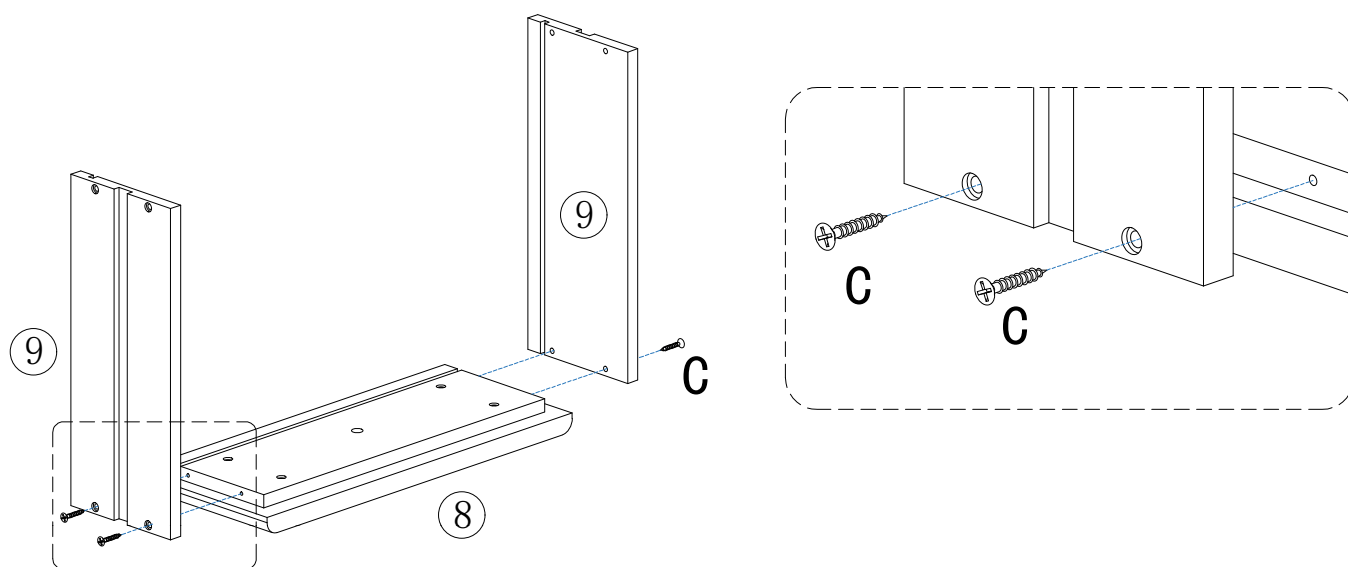

Step 12

CTG058 | 3 Drawers

Slide one Bottom Panel 11 into the grooves of each drawer.
Repeat for all three drawers.

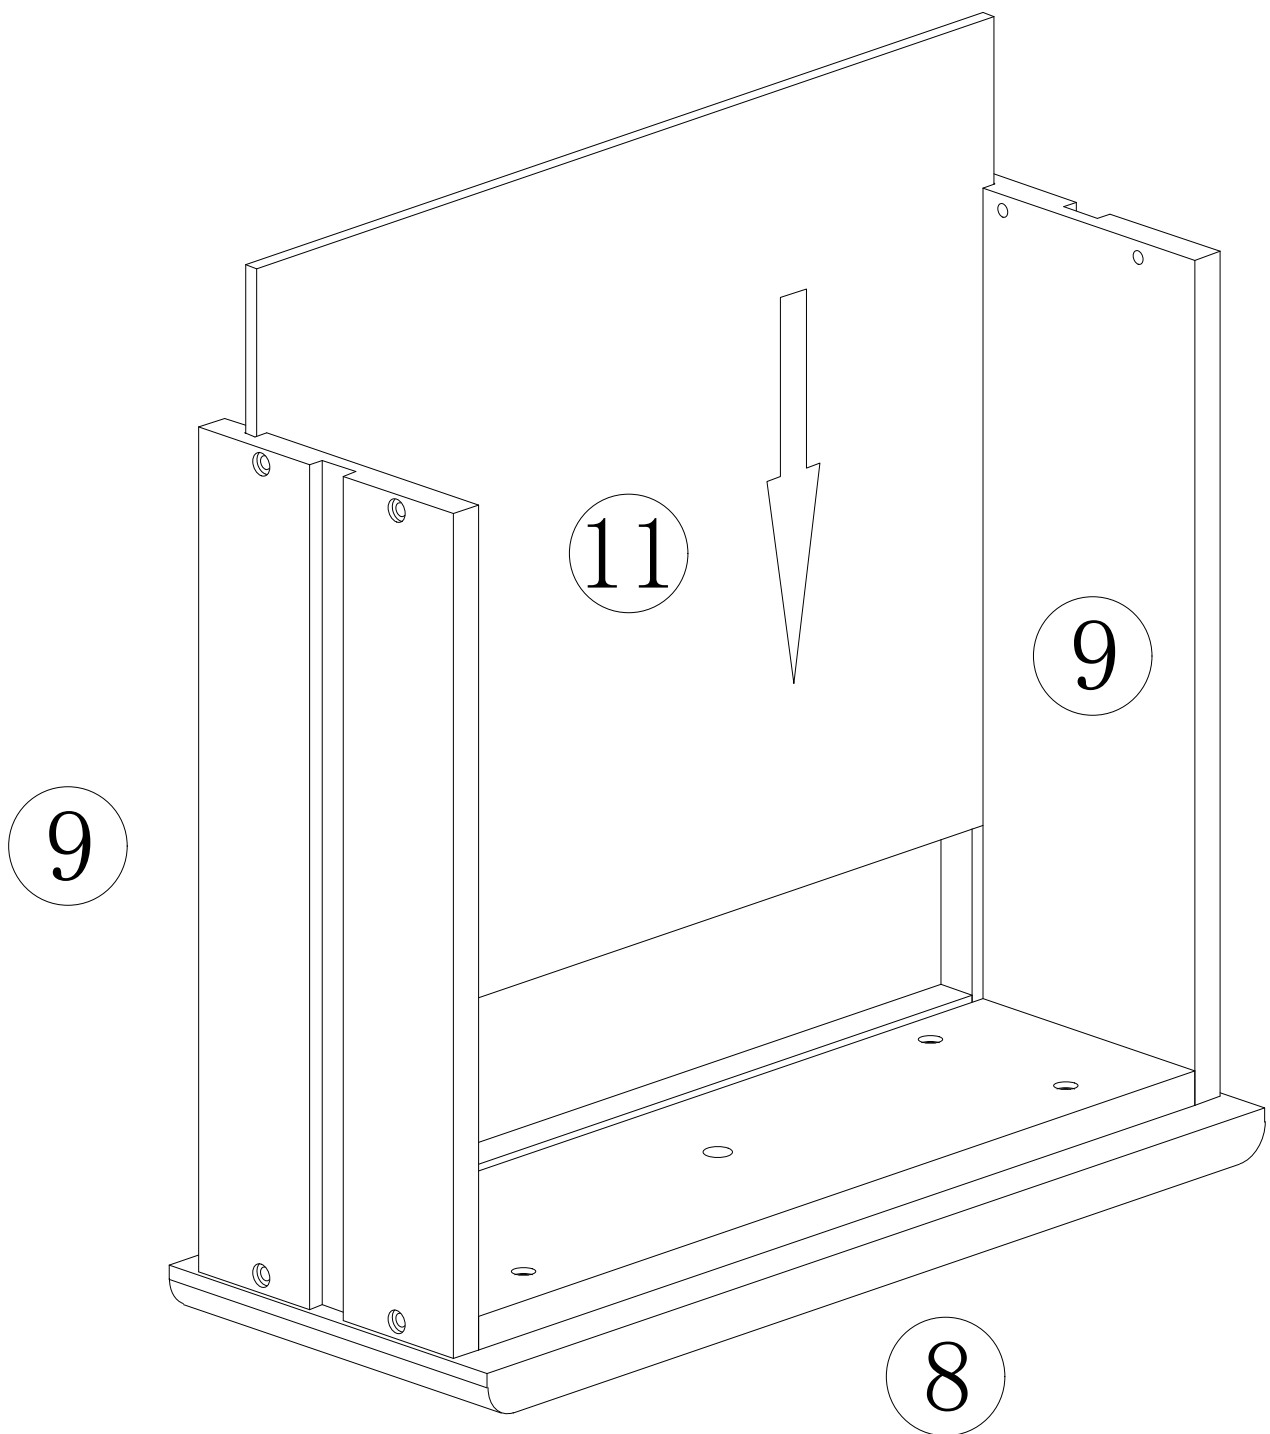


Step 13

CTG058 | 3 Drawers

Attach Back Panel 10 to each drawer using Screws C.

Attach one Handle J to each Drawer Front 8 using Screw K.


Hardware for all three drawers: C × 12 J × 3 K × 3 Tool: F (reuse)

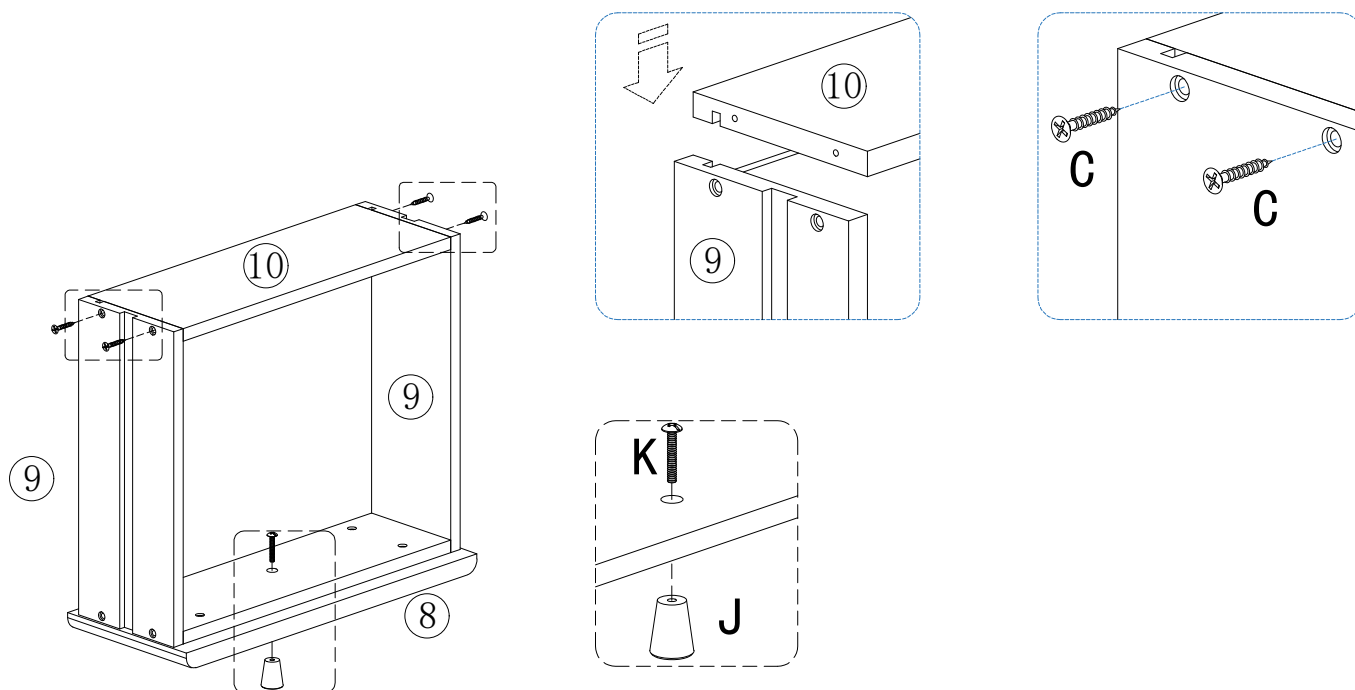

Step 14

CTG058 | 3 Drawers

Align the preinstalled drawer slides and slide all three assembled drawers into the cabinet from Step 10, as shown.

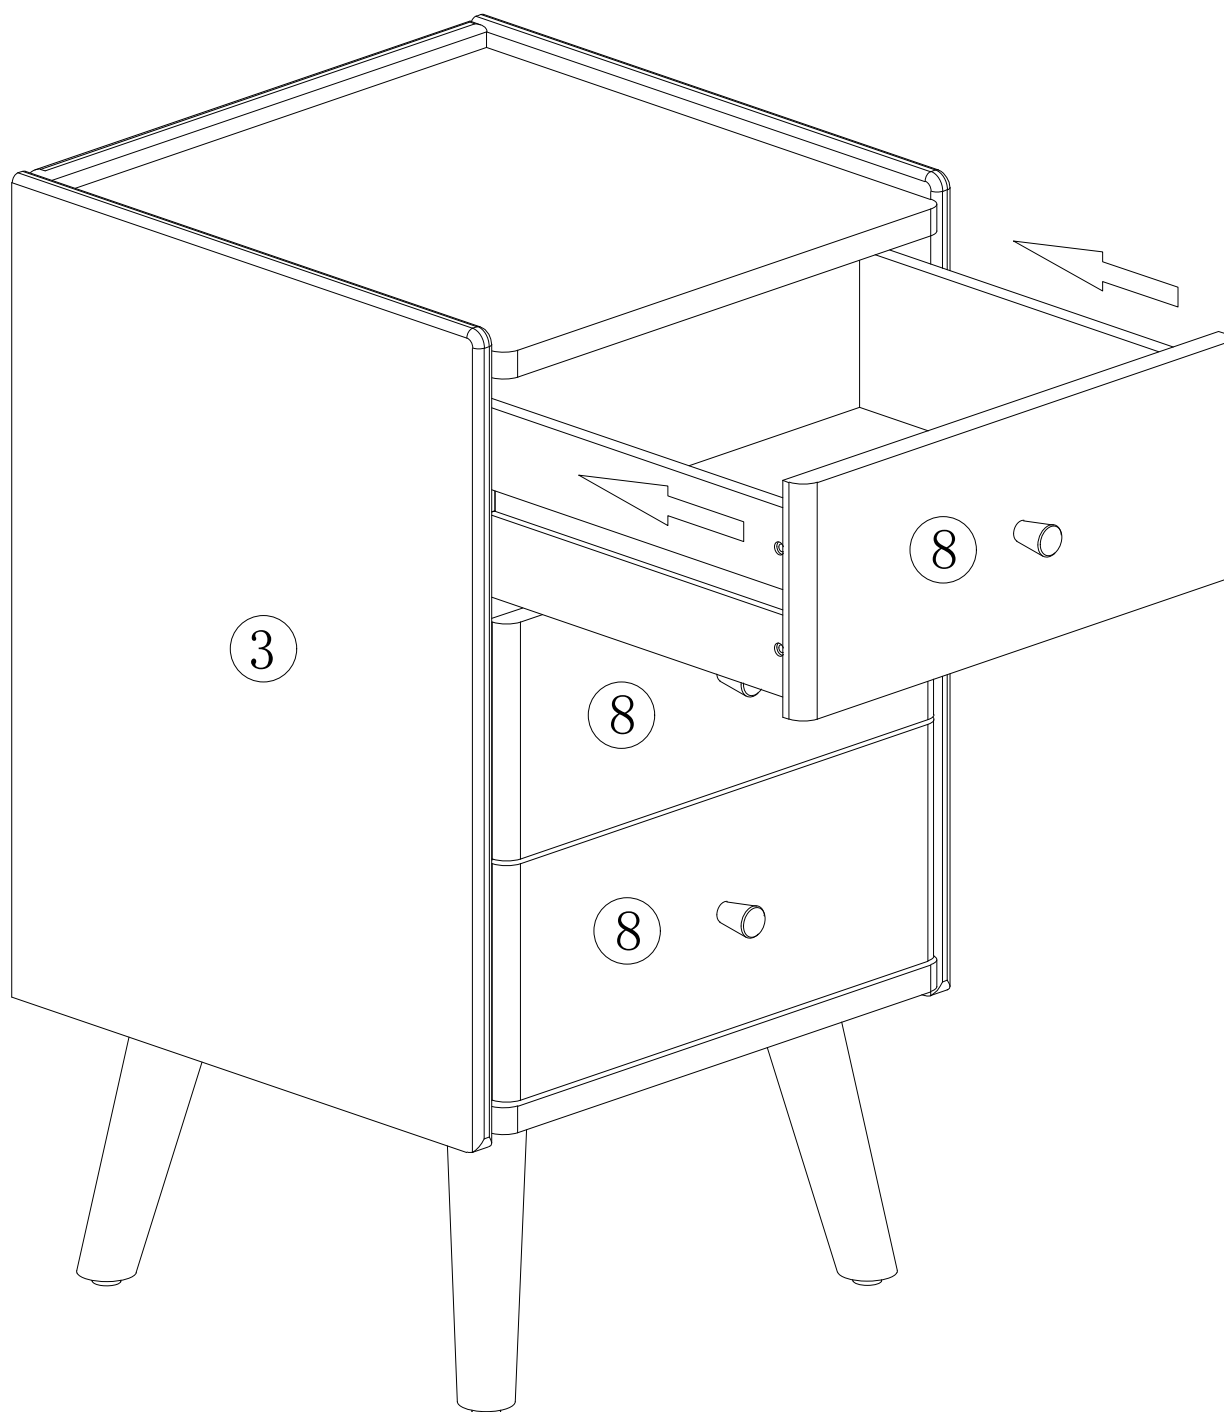

Step 15

CTG058 | 3 Drawers

Secure the assembled sidetable to the wall using Tip Restraint Kit H, as shown. Hardware: H × 1 kit

