

WARNING

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.
WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.
INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL. ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.


CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this lamp cannot be replaced
If the cord is damaged, the lamp shall be destroyed


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	machine screw		2X	E	ground screw		1X
B	mounting plate		1X	F	wire connector		3X
C	Back plate		1X	G	bulb		3X
D	Mounting screw		2X	H	shade		3X



JONATHAN Y

Model#: JYL1616
Product Dimensions:22.75"Lx8"Wx12"H
Product Dimensions:57.8x20.3x30.5CM

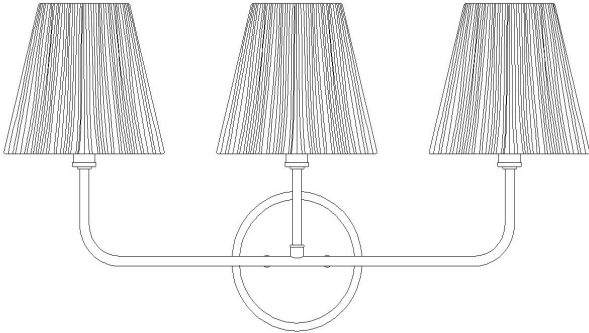

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.


Estimated Assembly Time: 25 minutes.

The number of people required to assemble the product:1 person.

If there are any questions relating to defects, missing parts, assembly issues, replacements, or device connectivity issues, please send a detailed email to cs@jonathany.com

- 1. Fix the mounting platet(B) to the outlet box with machine screw(A).
- 2. Make wire connections, with wire connectors(F), following the reference chart listed below.

Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.




*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw(E) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.
- 3.Thread the Back plate(C) to the mounting plate(B) with mounting screw(D)
- 4. Put the shade(H) on socket(I).
- 5. Finally install the light bulb(G) to the socket (I).

PLEASE USE TYPE"B" BULB MAX 25-WATT OR LED MAX 5-WATT
THERE ARE 3PCS 4-WATT LED BULB IN THE BOX

ENJOY YOUR LAMP

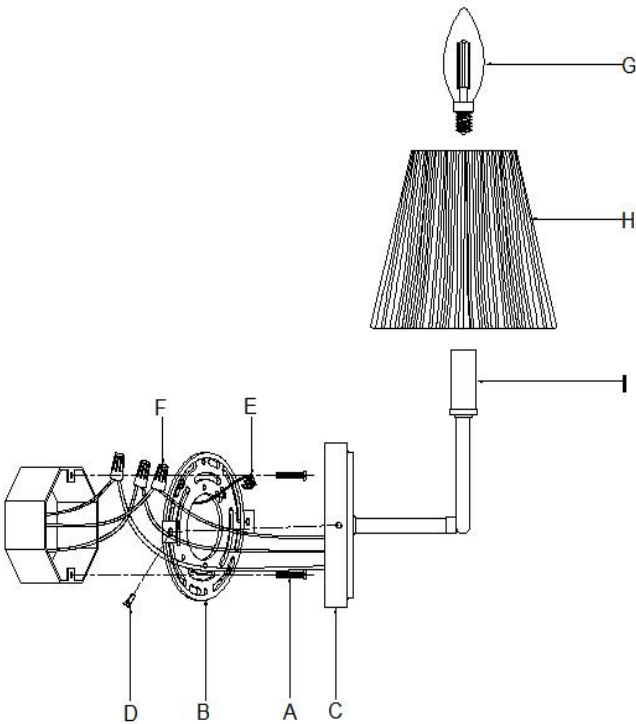

ADVERTENCIA

RECOMENDAMOS QUE LA INSTALACIÓN DE ESTE ACCESORIO DE ILUMINACIÓN SEA REALIZADA POR UN ELECTRICISTA LICENCIADO.

ADVERTENCIA *** DESCONECTE EL SUMINISTRO ELÉCTRICO PRINCIPAL DESDE LA CAJA DE FUSIBLES/INTERRUPTOR AUTOMÁTICO ANTES DE LA INSTALACIÓN.

INSPECCIONE EL ARTÍCULO CUIDADOSAMENTE ANTES DE INTENTAR INSTALARLO. SI HAY ALGÚN DAÑO O DEFECTO EVIDENTE, NO LO INSTALE. EL ARTÍCULO NO PODRÁ SER DEVUELTO UNA VEZ QUE HA SIDO INSTALADO.

CUIDADO Y MANTENIMIENTO

Para limpiar el interior del accesorio, primero desconecte la energía del accesorio apagando el interruptor automático o quitando el fusible de la caja de fusibles. Luego, use un paño limpio seco o ligeramente humedecido (use agua limpia, nunca un solvente) para limpiar la superficie interior del accesorio.

No use limpiadores con químicos, solventes o abrasivos fuertes. Use solo un paño suave y seco para limpiar con cuidado.

AVISO E INSTRUCCIONES DE SEGURIDAD IMPORTANTES

- * Asegúrese de tener todas las partes indicadas antes de comenzar el ensamblaje de este artículo.
- * Este artículo debe ensamblarse sobre una superficie suave para evitar rayar el acabado durante el ensamblaje.
- * Para reducir el riesgo de incendio, descarga eléctrica o lesiones a personas o propiedades, siga las pautas a continuación para un uso e instalación seguros.
- *El cable flexible externo o cordón de esta lámpara no puede ser reemplazado. Si el cordón está dañado, la lámpara debe ser destruida.

LISTA DE PIEZAS Y HERRAMIENTAS


PIEZA	DESCRIPCIÓN	IMAGEN	CANTIDAD	PIEZA	DESCRIPCIÓN	IMAGEN	CANTIDAD
A	Tornillo para máquina		2X	E	Tornillo de tierra		1X
B	Placa de montaje		1X	F	Conector de cables		3X
C	Placa trasera		1X	G	Bombilla		3X
D	Tornillo de montaje		2X	H	Pantalla		3X



Modelo#: JYL1616

Dimensiones del Producto:22.75"Lx8"Wx12"H

Dimensiones del Producto:57.8x20.3x30.5CM

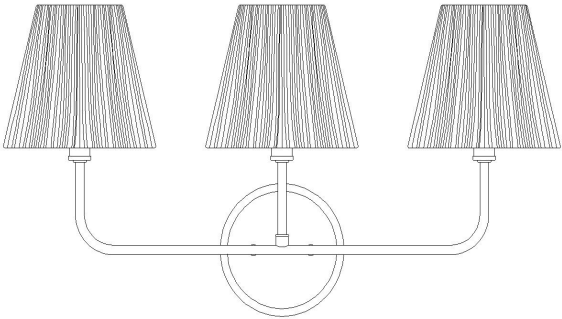

Preparación

Antes de comenzar el montaje del producto, asegúrese de que todas las piezas estén presentes. Compare las piezas con la lista de contenido del paquete y la lista de herrajes. Si falta alguna pieza o está dañada, no intente montar el producto.


Tiempo estimado de montaje: 25 minutos.

Número de personas requeridas para el montaje del producto: 1 persona

Si tiene alguna pregunta relacionada con defectos, piezas faltantes, problemas de montaje, reemplazos o problemas de conectividad del dispositivo, envíe un correo electrónico detallado a cs@jonathany.com.

- 1. Fije la placa de montaje (B) a la caja de salida con el tornillo para máquina (A).
- 2. Realice las conexiones de cables, utilizando los conectores de cables (F), según la tabla de referencia que se indica a continuación.


Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.



*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

Instrucciones de Conexión a Tierra:

- a) Para instalación en Estados Unidos:Enrolle el cable de tierra de la caja de salida alrededor del tornillo de tierra (E) del soporte de montaje.a no menos de 5 cm del extremo del cable. Apriete el tornillo de tierra. Si la luminaria incluye un cable de tierra, conéctelo al cable de tierra de la salida mediante un conector de cables.
- b) Para instalación en Canadá:Si la luminaria incluye un cable de tierra, enrolle el cable de tierra alrededor del tornillo de tierra verde (E) del soporte de montaje. Apriete el tornillo de tierra.
- 3. Atornille la placa trasera (C) a la placa de montaje (B) con el tornillo de montaje (D).
- 4. Coloque la pantalla (H) en el portalámparas / casquillo (I).
- 5. Finalmente, instale la bombilla / lámpara (G) en el portalámparas / casquillo (I).

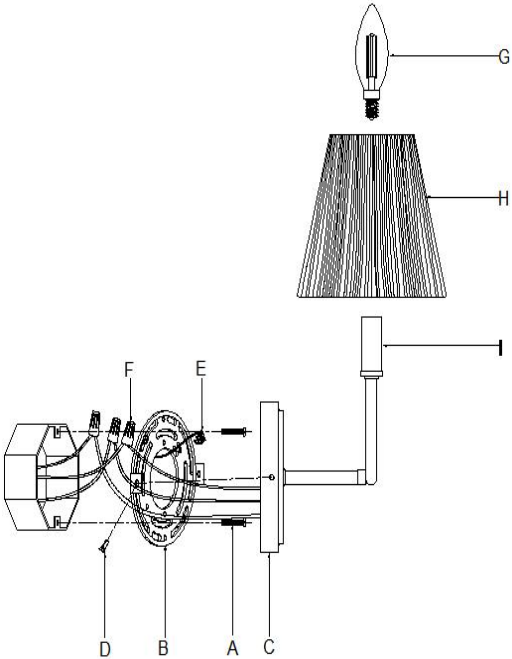

UTILICE ÚNICAMENTE BOMBILLAS DE ENCENDIDO/APAGADO TIPO "B" MÁX. 25 VATIOS,O BOMBILLAS LED MÁX. 5 VATIOS.
EL PAQUETE INCLUYE 3 BOMBILLA LED DE 4 VATIOS.

DISFRUTE DE SU LÁMPARA!