


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

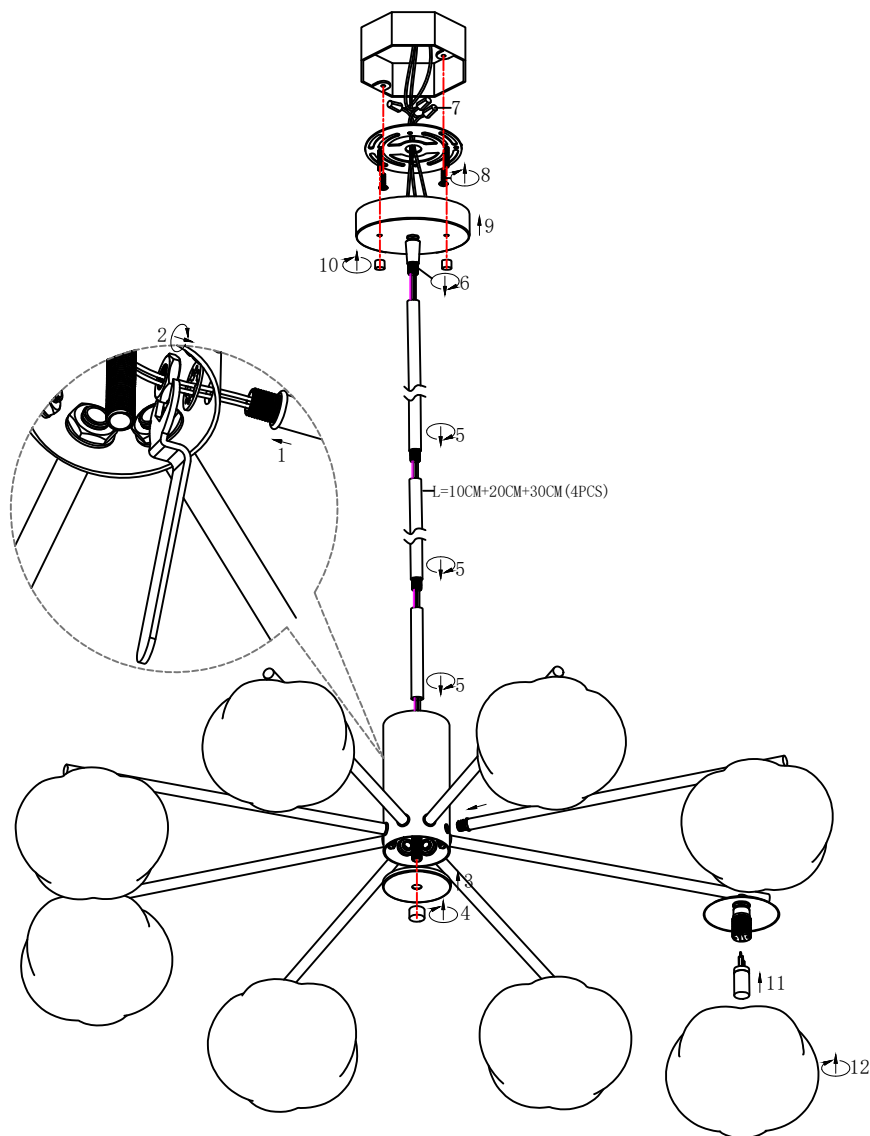

Before You Begin:

- Ensure power is turned off at the circuit breaker before installation.
- Read all instructions carefully.
- Installation should be performed by a qualified electrician if you are unfamiliar with wiring.

Step-by-Step Installation:

1. Secure the support rods (1) to decorative metal box using hex nuts (2)
2. Attach the flat cover (3) to decorative metal box using retaining collar (4)
3. Thread the main wires through the suspension rods (5), and secure the rods into fixture body.
4. Attach the swivel joint (6) to the suspension rods (5), and then tighten.
5. Connect the fixture wires to the supply wires using wire connectors (7).
·Note: Connect the black (hot) wire, white (neutral) wire, grounding wire to the corresponding wires on the junction box.
- Ensure no exposed conductors remain outside wire connectors or outside the junction box.
6. Secure the mounting plate to junction box using the screws (8).
7. Place the canopy (9) onto the mounting plate, and secure it using the decorative nuts (10).
8. Install the light bulbs into the lamp holders. (Bulbs Not Included)
9. Install the lampshades onto the lamp holders.

Safety Instructions:

To avoid fire, shock, and serious personal injury, follow all instructions carefully.

1. Do not install or use the light fixture if any part is missing or damaged.
2. To avoid possible electrical shock be sure electricity is turned off at the main fuse or circuit breaker box before wiring.
3. Make certain no bare wires are exposed outside the wire connectors.
4. All wiring must conform to national and local electrical codes.
5. Follow the recommended instructions for the proper method of wiring your new light fixture. If you feel you do not have enough electrical wiring knowledge or experience, have your light fixture installed by a licensed electrician. Any electrical work not described in this manual should be performed by a licensed electrician.