




LED Knuckle Flood Light

SKU: HFLB04A

[Instruction Manual]

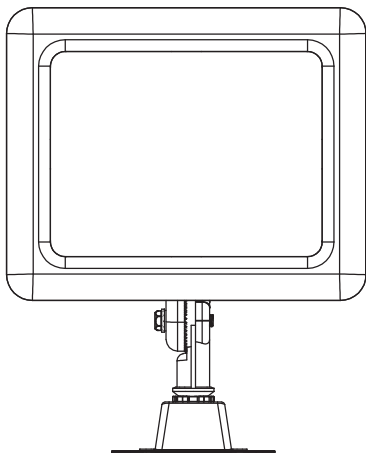

Thank you for your purchase.
Please contact us if you have any questions.
We will get back to you within 24 hours.
Please attach your Order ID so that
we can serve you better.

WARNING: PROPOSITION 65

Handling the coated electrical wires of this product could expose you to chemicals including lead, which is known to the State of California to cause cancer and/or birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

WARNING:



Read all of these installation instructions before installing the fixture. These products may represent a possible shock or fire hazard if improperly installed or attached in any way. Products should be installed by a qualified electrician in accordance with these instructions, current local electrical code or the current National Electric Code (NEC).

1. This product must be installed by a person familiar with the construction and operation of the product and the hazards involved, and in accordance with current electrical codes and/or the current National Electric Code (NEC).
2. To reduce the possibility of electric shock, fixture must be grounded.
3. Do not attempt to open the LED light engine.
4. Do not look directly into fixture.
5. Fixture is equipped with universal driver 120-277V (i.e. 120V, 208V, 240V or 277V)

INSTRUCTIONS:

1. Before installation, please cut off the power.
2. Remove old fixture if necessary for installation.
3. Phase to neutral WIRING 120V/277V:
 - (1)Connect supply ground to fixture ground (green/bare copper) lead.
 - (2)Connect supply common to fixture neutral (white) lead
 - (3)Connect supply Vin to fixture hot (black) lead. Tuck all wires carefully into wiring chamber ensuring that no wires are pinched.
4. Phase to phase WIRING 208/240V:
 - (1)Connect supply ground to fixture ground (green/bare copper) lead.
 - (2)Connect supply L1 (Hot) to fixture neutral (white) lead.
 - (3)Connect supply L2 (Hot) to fixture hot (black) lead. Tuck all wires carefully into wiring chamber ensuring that no wires are pinched.
5. Cap and insulate all unused leads.
6. To aim the light, loosen the side bolt connected to the knuckle arm to aim the fixture up or down. Re-tighten bolt to secure the fixture in the desired position.

7. To prevent rain, use silicone caulk to caulk the top and sides of the canopy and aiming arm.

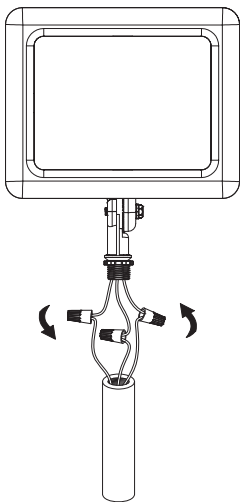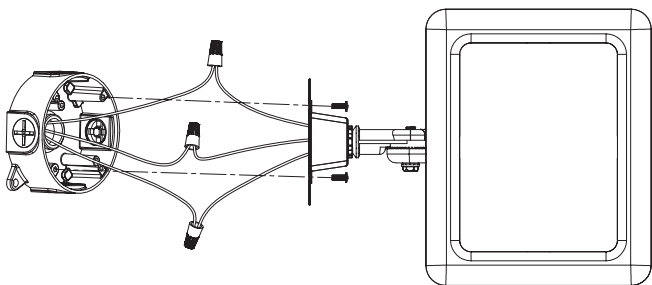

Specifications:

Model: LF27-74W

Input Voltage: 120-277VAc, 50Hz\60Hz

Wattage: 74W

Luminance: 10000lm

Color temperature: 5000K

Operation Temp: -40°C~40°C

Package Includes:

LED Knuckle Flood Light x 1

Back Plate x 1

Instruction Manual x 1

One Year Limited Warranty

Dewenwils warrants this product to be free from defects in material and workmanship for a period of one year from the date of purchase.

Warranty is void if damage is caused by misuse or improper installation.

Our dedicated customer service team will get back to you within 24 hours.