












ASSEMBLY INSTRUCTION


parts list

Label	Picture	Description	QTY (PCS)
A		Left Armrest	1
B		Right Armrest	1
C		Right Front rail	1
D		Left Front rail	1
E		Iron Back Frame	1
F		Iron Back Frame	1
G		Iron Seat Frame	1
H		Iron Seat Frame	1
I		Connecting Wooden Batten	1
J		Link Pipe for Iron Back Frame	2
K		Metal Middle Leg	2
L		Left Back Cushion	1
M		Right Back Cushion	1
N		Seat Cushion	2
O		Pillow	2
P		Plastic Leg	4


parts list

Label	Picture	Description	QTY (PCS)
Q		Plastic Washer	4
R		Iron Connecting Plate	1
S	 M6*50MM	Bolt (M6*50)	4
T	 M6*30MM	Bolt (M6*30)	10
U	 M6*14MM	Bolt (M6*14)	6
V		Allen Wrench	1
W		Flat Washer	8
X		Nut	4
Y		Front Rail Cover	1
Z		Backrest Cover	1
①		Spanner	1
②		Iron Connecting Plate	2


Step 1

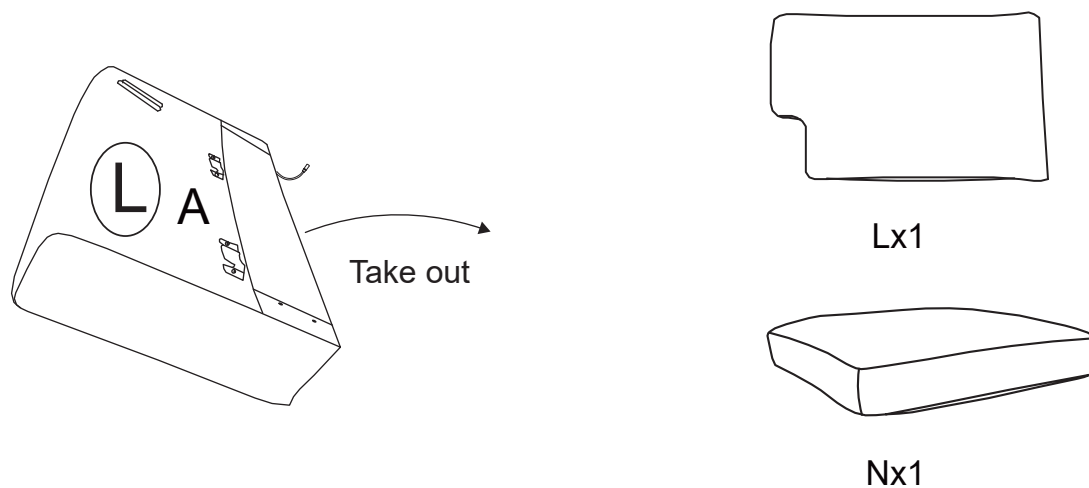


Step 2

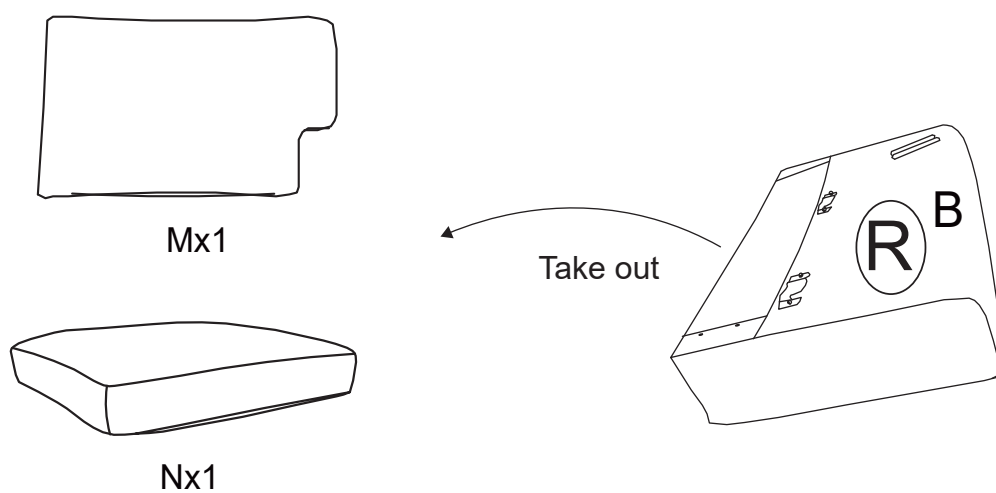


Step 3

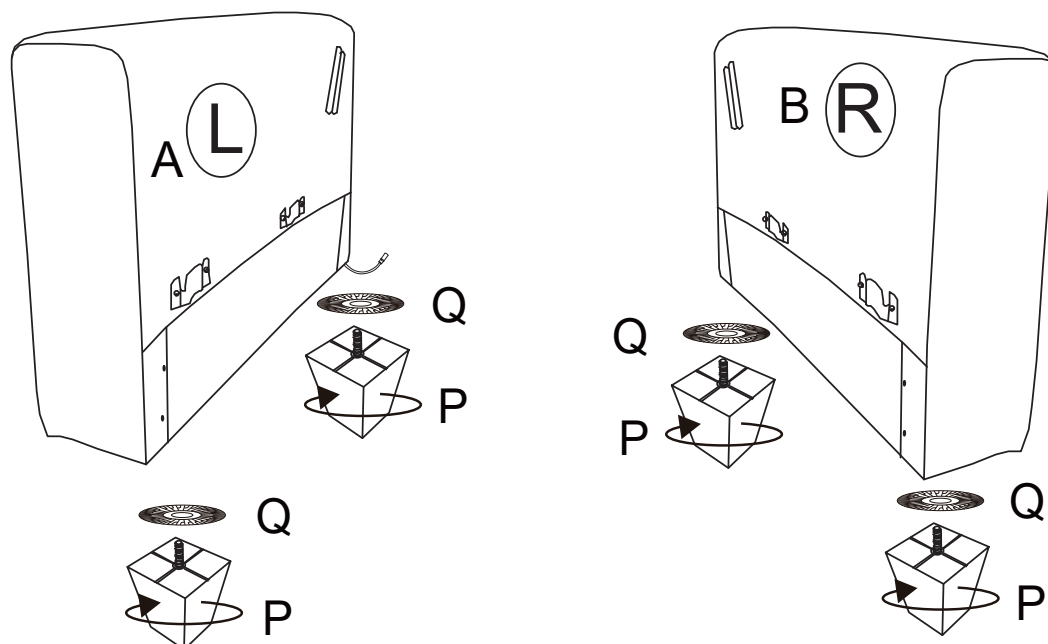


Step 4

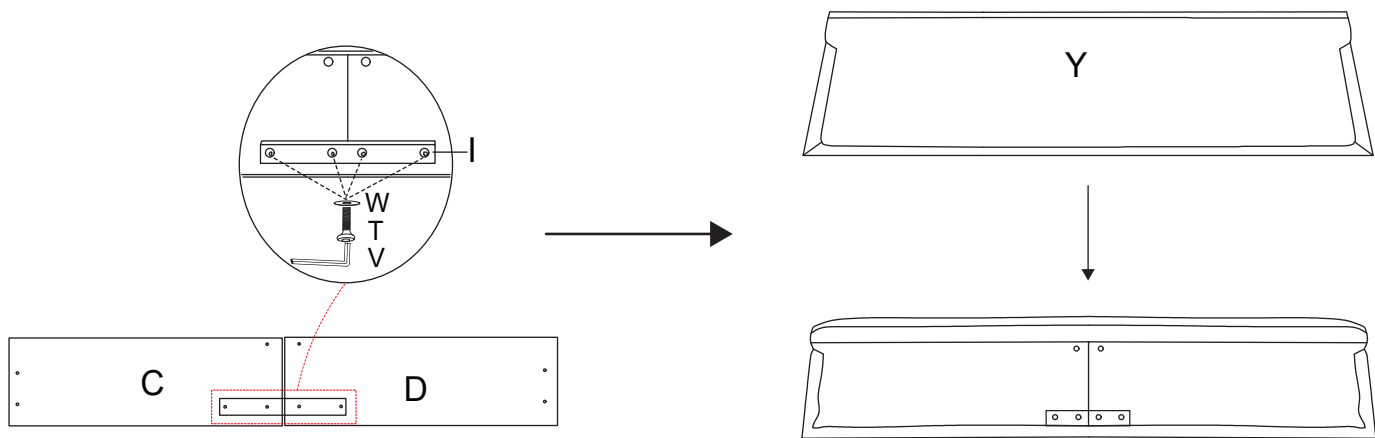

Step 5

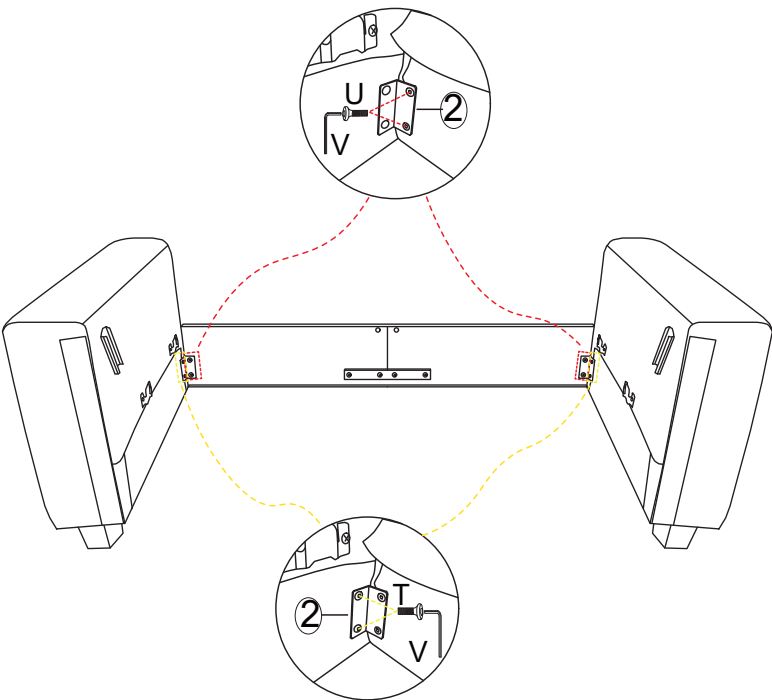


Step 6

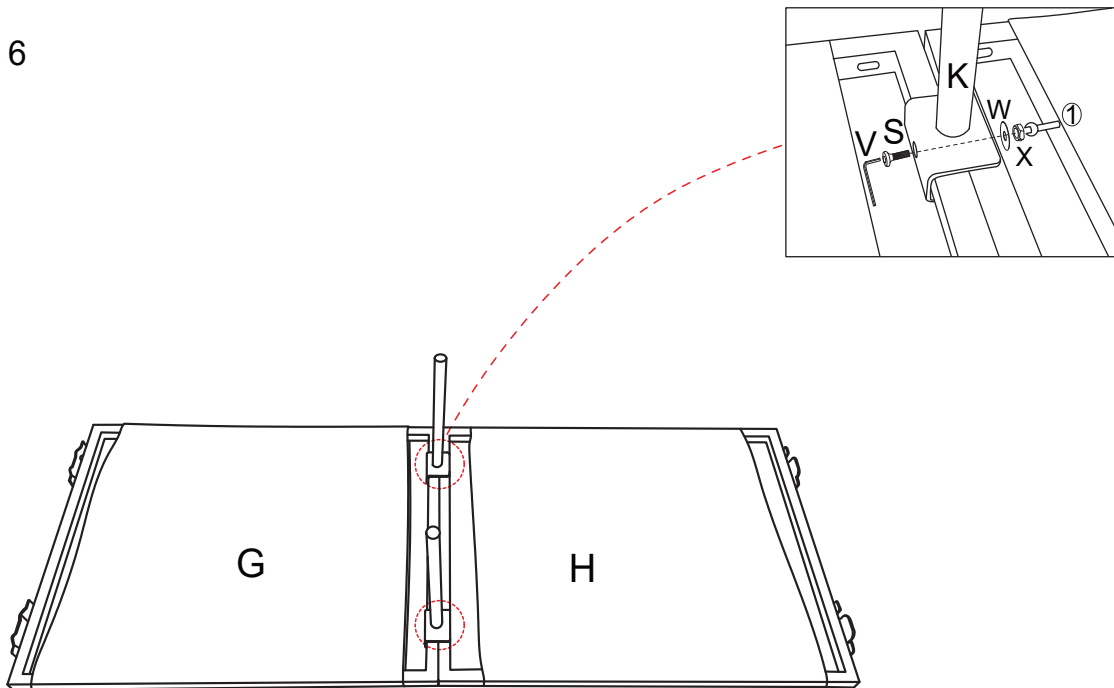


Step 7


Mount the seat iron frame first, then cover the front fabric onto the frame.

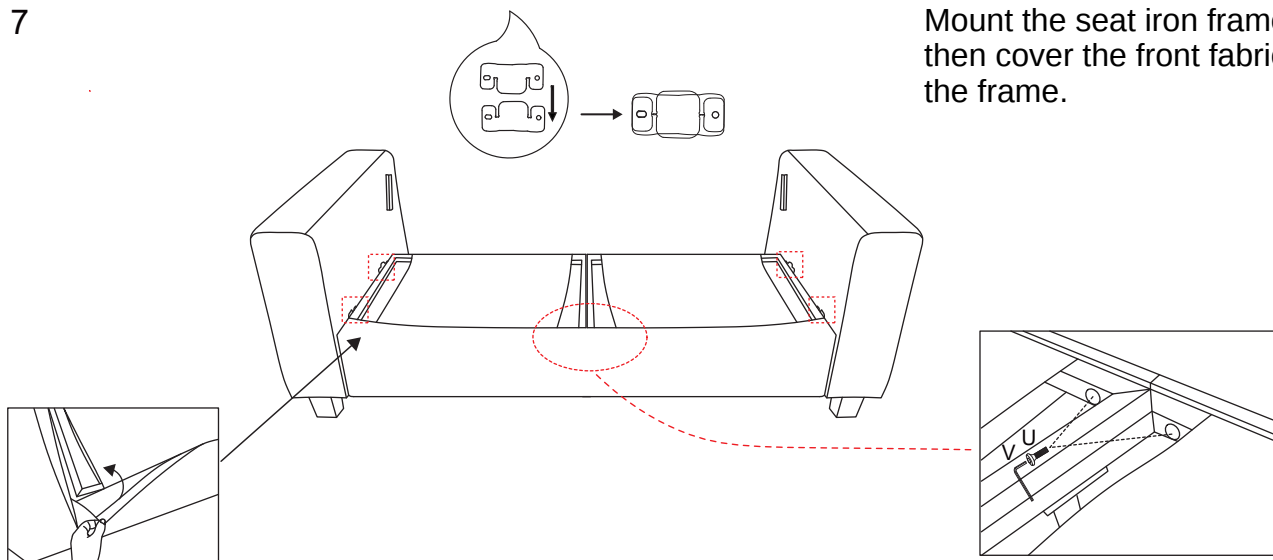


Step 8

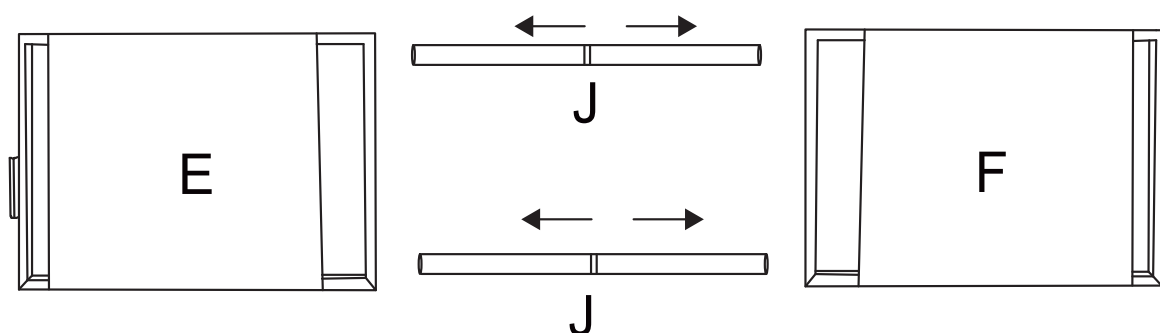


Step 9

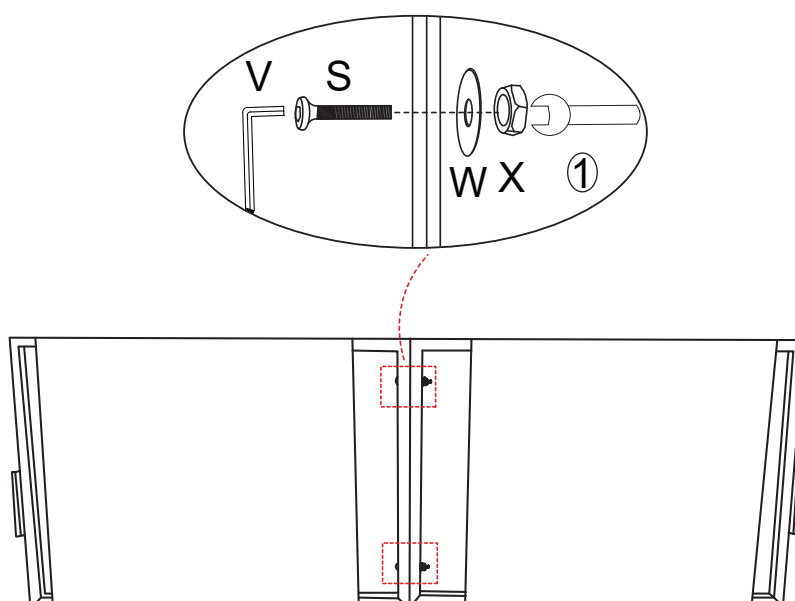

Step 10

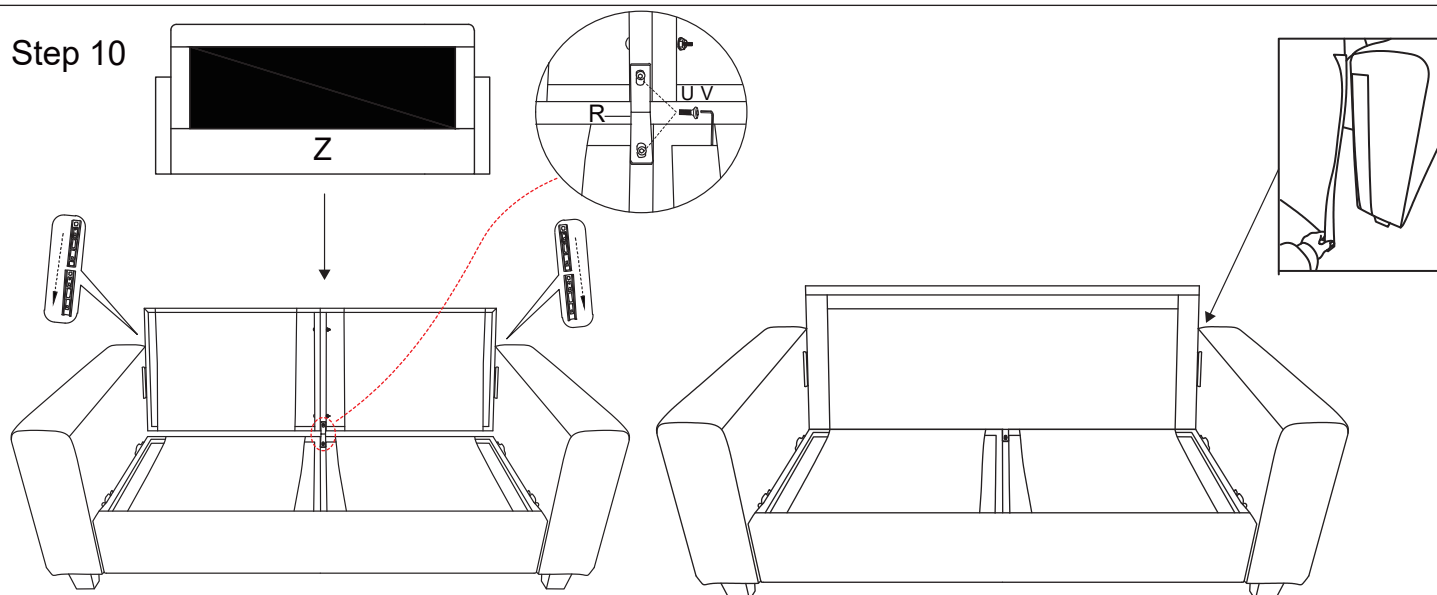

Step 11

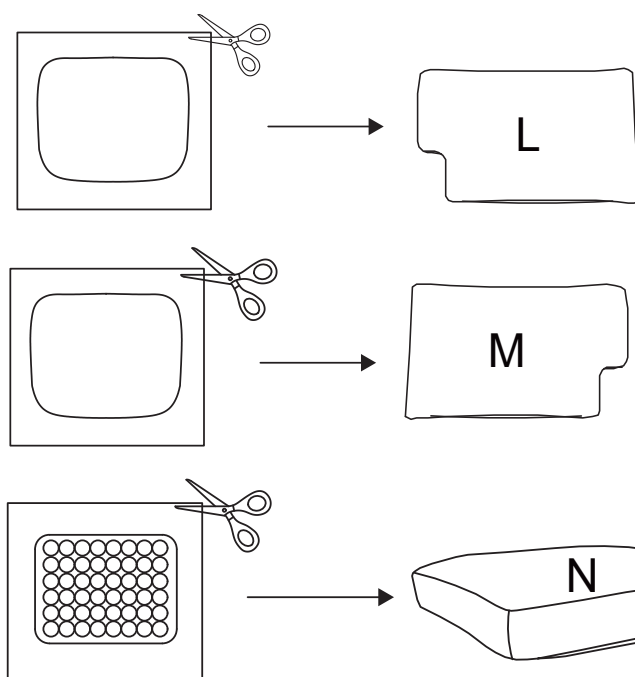

72h

Pat to make it fluffy and assist with regaining its original shape.

Step 12

