


INSTALLATION INSTRUCTIONS

For Item No. 1400-07

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

Fig. 1

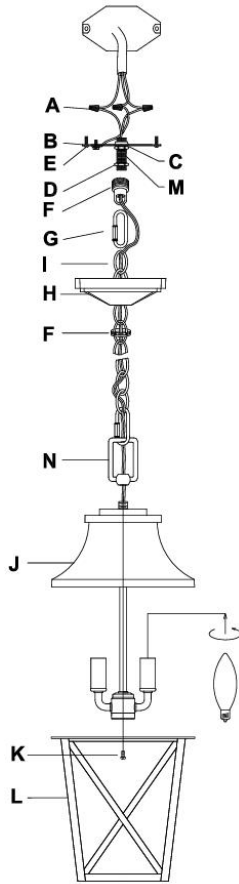

HANGING THE FIXTURE (Fig. 1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Place lock washer (C) over end of nipples (M) protruding through crossbar (B) and thread hex nut (D) onto nipple (M) until tight. Take this crossbar assembly and mount to ceiling outlet box screws (E). Tighten screws securely with screwdriver. The side of the cross bar marked "GND" must face out.
3. Use Chain link (G) to connect to the fixture loop (N). By measuring, determine correct number of links needed for proper hanging height. Using pliers disconnect and discard remaining chain.
4. Lace the fixture wires through the chain. Slip loop collar (F) over the chain, and then do the same with Canopy (H). Use chain link (G) to hang the fixture on the loop (F) at the ceiling. Feed the fixture wires through the loop (F) and the nipple (M) and pull until taut.

CONNECTING THE WIRES (Fig. 2)

5. At this point, connect the electrical wires as follow:

Connect the smooth wire from the fixture to the black (hot) house wire. Connect the ribbed wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper). Connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the crossbar using the green screw provided. Tuck the wire connections neatly into the ceiling junction box.

6. Finally screw the loop collar (F) to the loop (F) and secure the canopy (H) to the ceiling.
7. Take off the cage (L) by set screws (K), install the bulb (E12-Candelabra, not supplied) in accordance with the fixture's specification. Secure the cage (L) back to the fixture (J) by set screws (K)

DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Fig. 2

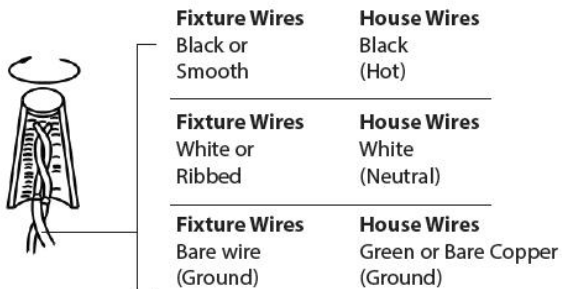


Fig.3 Sealing

