

Water reservoir




- ① Main part ② Planting basket 14 ③ Bag of ceramicsite 1 ④ Covers 2
- ⑤ Voltage regulator 1 ⑥ Nutrient solution 1 ⑦ Bag of seeds 2 ⑧ Wheels 4
- ⑨ Plug for column hole 4 ⑩ Plug for corner voids 4 ⑪ Instruction manual ⑫ Measuring cup 1

Planting machine



- ① Vertical planting machine ② Planting basket 14
- ③ Bag of ceramicsite 1 ④ Covers 2
- ⑤ Plug for corner voids 4 ⑥ Columns 4


Grow lights

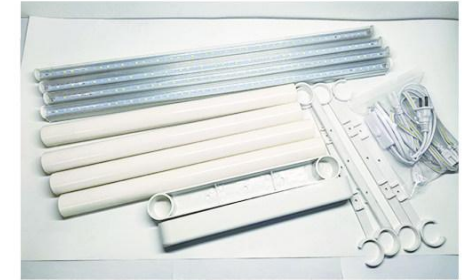

Accessories

- ① Grow lights 4 ② Wedges for connecting two lamps 4
- ③ Lamp holder at the top 1 ④ Connecting wire 3
- ⑤ Switch wire 1

Installation instructions of vertical planting machine with water circulation

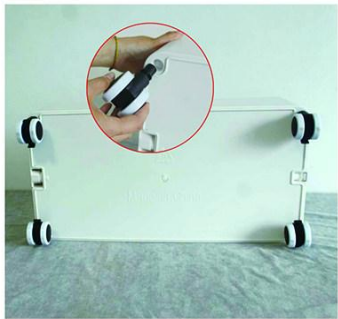

- ① Open the box and check accessories against the list. Insert the four wheels into the holes at the four corners of the water reservoir respectively.



- ② Install the column of water inlet. Remove the blue cap of the column and insert it into the hole of the water inlet.



- ③ Install the column of water outlet. Remove the yellow cap of the column and insert it into the hole of the water outlet. Insert other columns into the residual two holes randomly.



- ④ Install the vertical planting box. Make sure align the hole of water inlet at the bottom of box and the column which was removed the blue cap. Then align other holes and columns in order to insert all columns into holes fully.



- ⑤ With the same principle, insert the columns into the holes of planting box and one layer planting box can be added.



- ⑥ If there are no grow lights, cover the four column holes at the top of the machine with plugs.

Installation instructions of grow lights



- ① Remove the four plugs for the column holes at the top of the machine.



- ② Install the lamp holder. Insert all the columns of the lamp holder into the column holes at the top of the machine and then fix the beam.



- ③ Buckle the wedges to both ends of the column of the lamp holder. Note: the slot of the wedge is downward.



- ④ Aim the lamp at the slots of the wedges and press it with a little force to make it fastened by the slots.



- ⑤ Connect the light wires and switch wires in series following the red lines as shown in the figure.



- ⑥ Begin to use light once the seeds have started to germinate. Best distance between the lamps and the vegetables is 5 cm. Light should be holding on 10-12 hours a day.