



# Kingston™ | K-25077-SST

Two-piece elongated toilet, 1.28 gpf

## Features

- Ideal for commercial installations
- Antimicrobial finish inhibits the growth of mold-, mildew-, stain-, and odor-causing bacteria on the fixture surface. This product does not protect users against bacteria, viruses, or other disease organisms. Always clean and wash this product thoroughly before and after each use
- Two-piece design
- Elongated bowl offers added room and comfort
- 1.28 gpf (4.8 lpf)
- Durable metal left-hand Polished Chrome trip lever
- 2-1/8" (54 mm) fully glazed trapway
- Tank cover locks included
- Easy-to-service silicone seal
- Sanitary guard where bowl and tank meet for ease of cleaning
- Encapsulated bolts prevent rust and corrosion
- Combination consists of toilet bowl and tank
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Class Five® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush



## Sustainability



## Available Colors/Finishes

*Color tiles intended for reference only.*

0 White



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
8-06-2026 19:06 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

*ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.*

*Accessibility standards may require controls to be located on the open side of the toilet.*

*Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.*

*This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.*



ASME A112.19.2/CSA B45.1

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

## Technical Information

|                       |                                      |
|-----------------------|--------------------------------------|
| Installation Type:    | Floor-mount                          |
| Rough-in:             | Standard 12" (305mm)                 |
| Flush Type:           | Class Five                           |
| Flush Rate:           | 1.28 gpf (4.8 lpf)                   |
| Bowl Shape:           | Elongated                            |
| Seat-Mounting Holes:  | 5-1/2" (140 mm)                      |
| Waste Outlet:         | Floor                                |
| Trapway Size:         | 2-1/8" (54 mm)                       |
| Trapway Type:         | Exposed                              |
| Water Surface Size:   | 10-5/8" x 6-15/16" (269 mm x 176 mm) |
| Rim to Water Surface: | 5-5/8" (143 mm)                      |

## Included Combo Skus

- K-25076-SS Elongated toilet bowl
- K-25100-T Toilet tank, 1.28 gpf

## Recommended Products/Accessories

K-23726 Drain treatment

K-5420 Low-profile toilet bolt caps

K-7637 3/8" NPT angle supply with stop and annealed vertical tube

K-4636-RL ReadyLatch® Quiet-Close™ elongated toilet seat

## Warranty

*See website for detailed warranty information.*

KOHLER® Toilets and Seats Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

8-06-2026 19:06 - US-CA

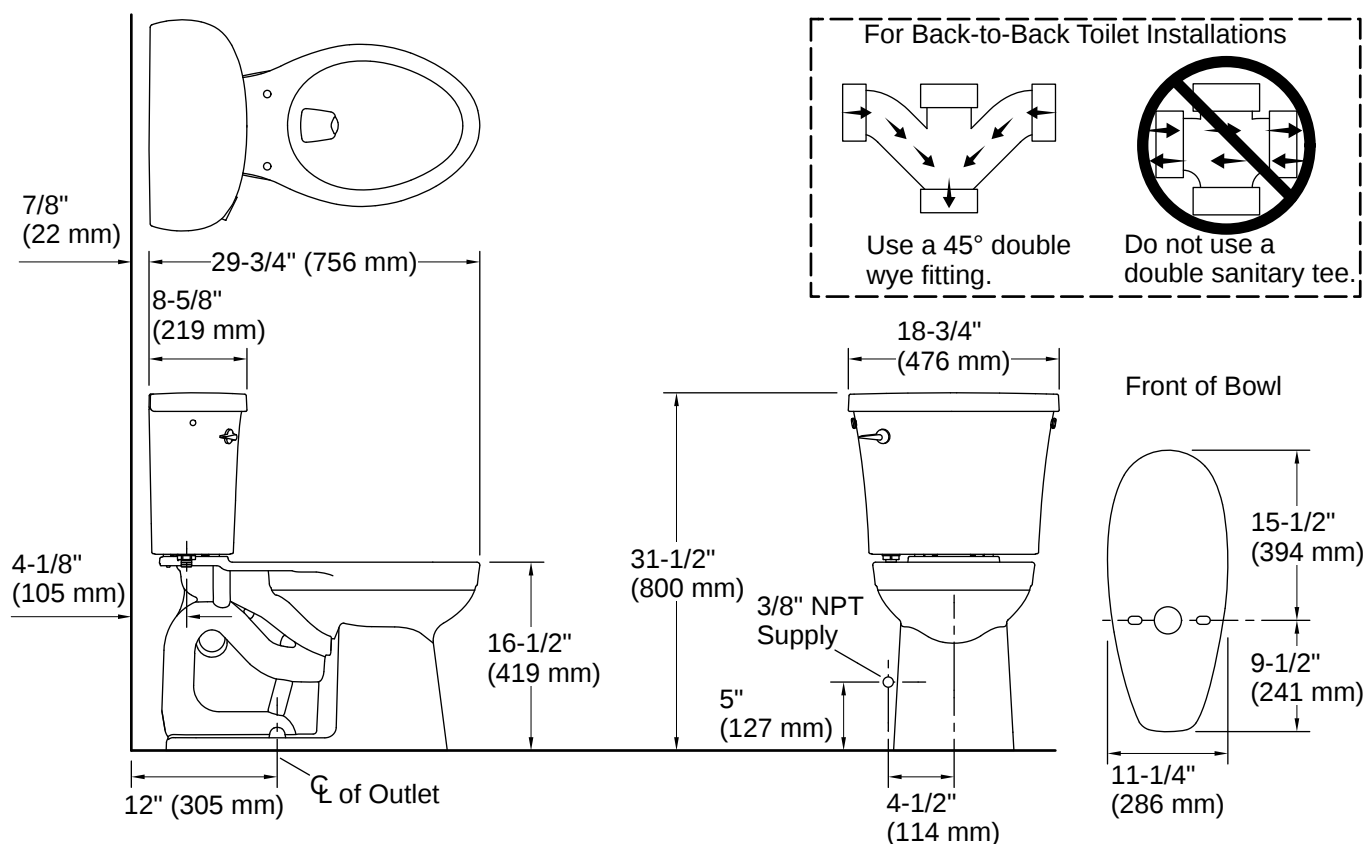

## Installation

- Three-bolt quick-connect installation
- Standard 12" (305 mm) rough-in
- Seat and supply line sold separately

## Installation Notes

*Install this product according to the installation instructions.*

For back-to-back toilet installations: Use only a 45° double wye fitting.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

8-06-2026 19:06 - US-CA