

# ASSEMBLY INSTRUCTIONS



## CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have residue during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

## TOOLS REQUIRED



Ladder



Safety Goggles



Electrical Tape



Phillips Screwdriver



Flathead Screwdriver




Wire Cutter



Wire Stripper

## HARDWARE INCLUDED



Fixture



Mounting Unit



Deco Ring



S-shaped iron sheet



Screws 1



Hex Nut



Screws 2



Mounting Screws




Wire Nuts



Spanner

**\*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**


## EXPLODED PARTS

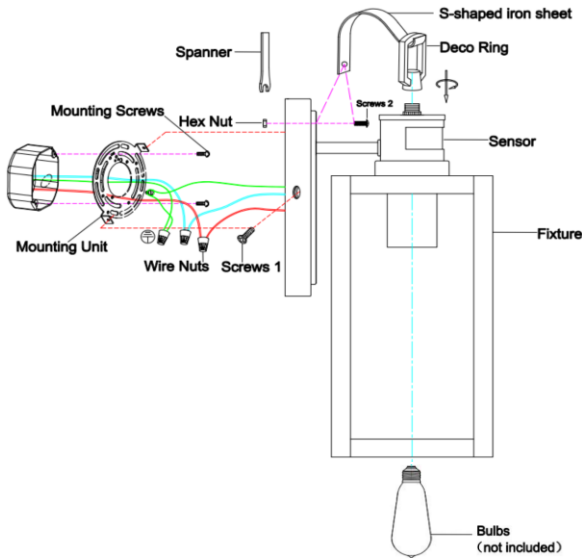

## INSTALLATION

### STEP 1

Unscrew the ball nut from the mounting unit. Use the mounting screws to attach the mounting unit to the junction box.

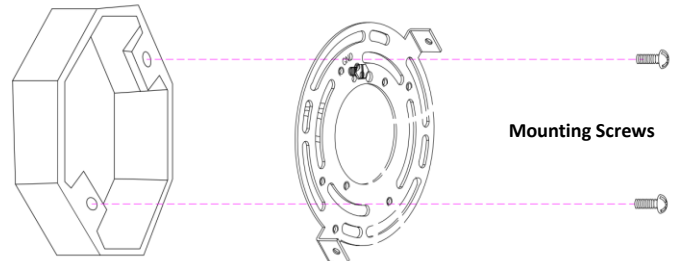

### STEP 2

Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative, and ground wires with the supplied wire nuts. Secure with electrical tape.

Black or Red wire (hot) from the Junction box



Black wire from the fixture

White wire (neutral) from the Junction box



White wire from the fixture

Bare or green ground wire from the Junction box



Ground wire from the fixture

Green Ground Screw



Sealing tape (not included)

