
ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

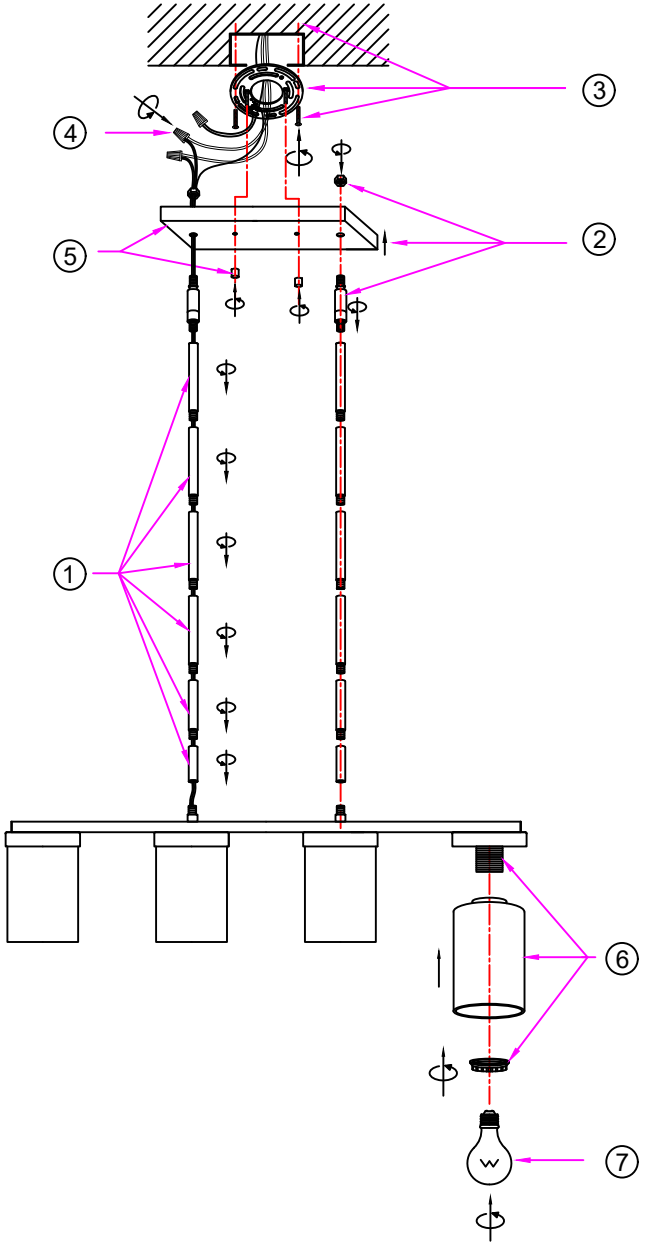

Before You Begin:

- Ensure power is turned off at the circuit breaker before installation.
- Read all instructions carefully.
- Installation should be performed by a qualified electrician if you are unfamiliar with wiring.

Step-by-Step Installation:

1. Assemble the suspension rod onto the lamp body, adjusting the quantity as needed to achieve the desired length.
2. Thread the swivel joint onto the suspension rod. Pass the joint through the canopy and secure with the provided nuts.
3. Secure the mounting plate to the U.S.-standard junction box using screws.
4. Connect the output and input wires with connector.

Note: Connect the black (live) wire to black, white (neutral) wire to white, and ground wire to the grounding terminal. Ensure no exposed wiring remains during connection.

5. Secure the canopy to the mounting plate using the provided nuts.
6. Install the Glass Shade.

·Place the glass shade over the lamp socket.
·Adjust gently to center the socket within the shade.
·Tighten the socket ring to secure.

7. Screw the bulb into the lamp socket. (Bulb Not Included)
8. Restore electricity and test the bulb for proper operation

Safety Instructions:

To avoid fire, shock, and serious personal injury, follow all instructions carefully.

1. Do not install or use the light fixture if any part is missing or damaged.
2. To avoid possible electrical shock be sure electricity is turned off at the main fuse or circuit breaker box before wiring.
3. Make certain no bare wires are exposed outside the wire connectors.
4. All wiring must conform to national and local electrical codes.
5. Follow the recommended instructions for the proper method of wiring your new light fixture. If you feel you do not have enough electrical wiring knowledge or experience, have your light fixture installed by a licensed electrician. Any electrical work not described in this manual should be performed by a licensed electrician.