
















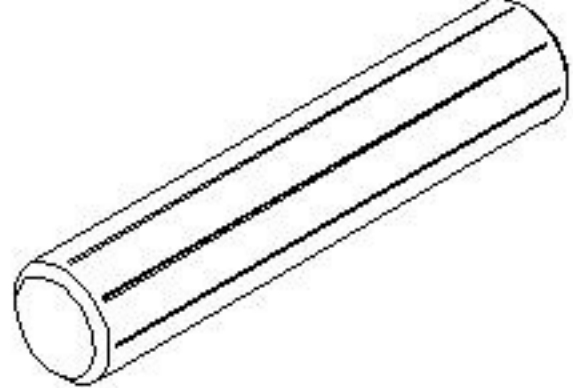

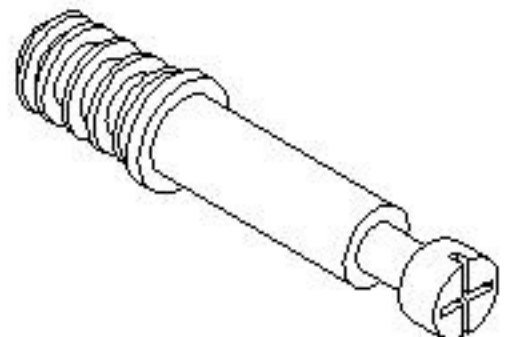
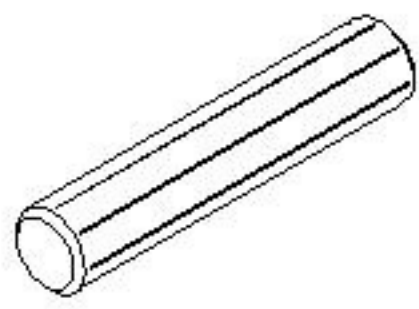


ASSEMBLY INSTRUCTION

3-DRAWER DRESSER


A Top Panel	B Left Side Panel	C Right Side Panel	D Bottom Frame
			
1pc	1pc	1pc	1pc
E Back Plywood	F Post	G Small Drawer Front	H Small Drawer Side (Left)
			
1pc	4pcs	1pc	1pc
I Small Drawer Back	J Drawer Base	K Small Drawer Side (Right)	L Big Drawer Front
			
1pc	3pcs	1pc	2pcs
M Big Drawer Side (Left)	N Big Drawer Back	O Big Drawer Side (Right)	P Screw 3*16mm
			
2pcs	2pcs	2pcs	36pcs
Q Extension Runner 400mm	R Dowel 8*35mm	S Cam Lock 15*12	T Cam Bolt 5*25
			
3pcs	12pcs	26pcs	26pcs

U Dowel
6*30mm

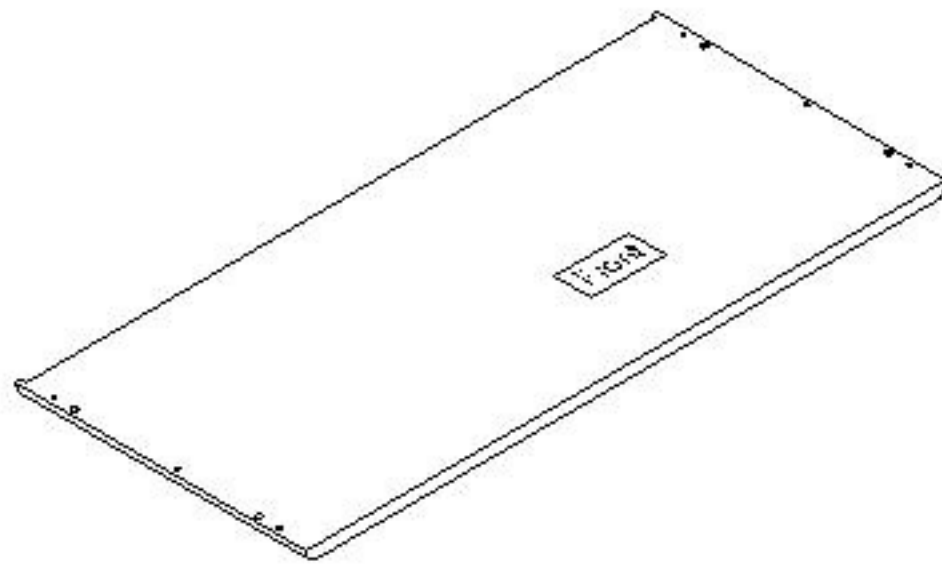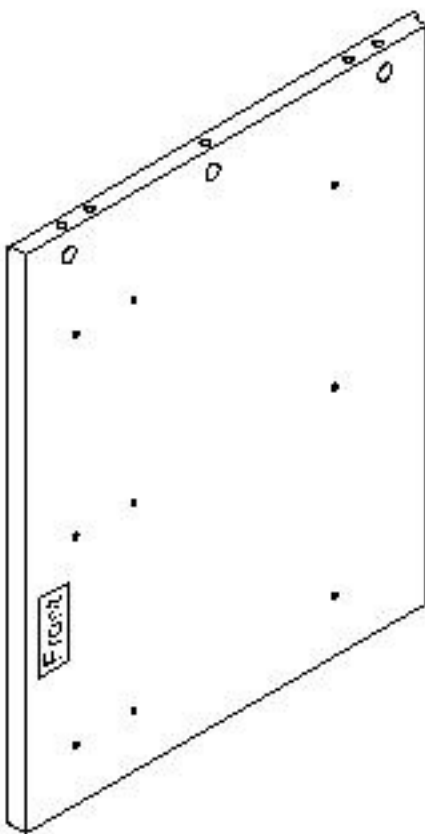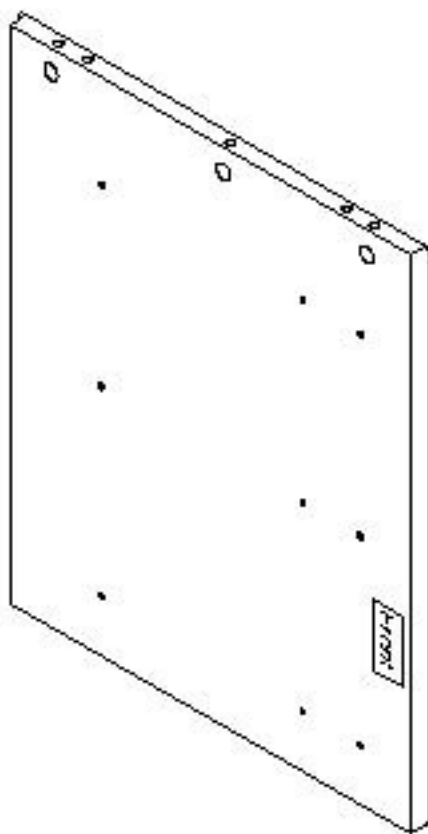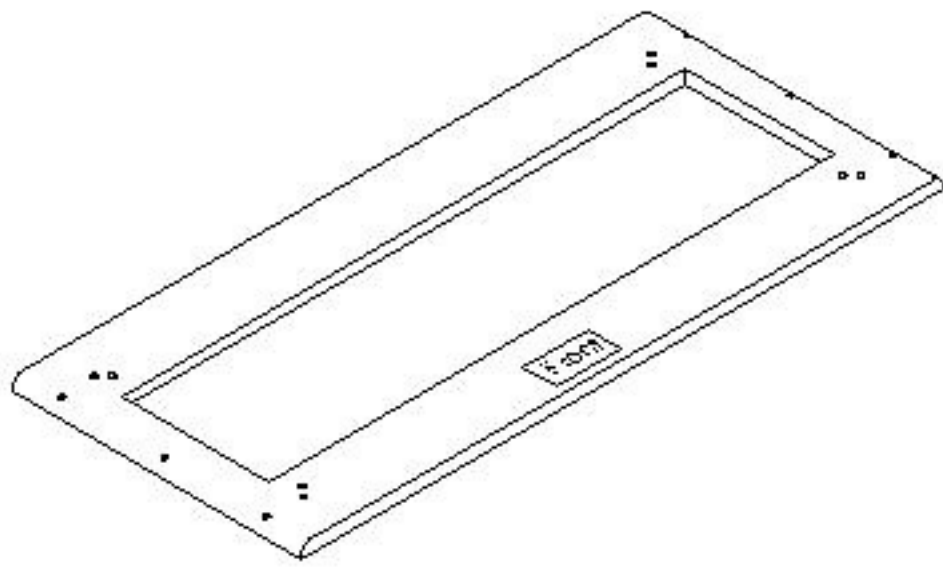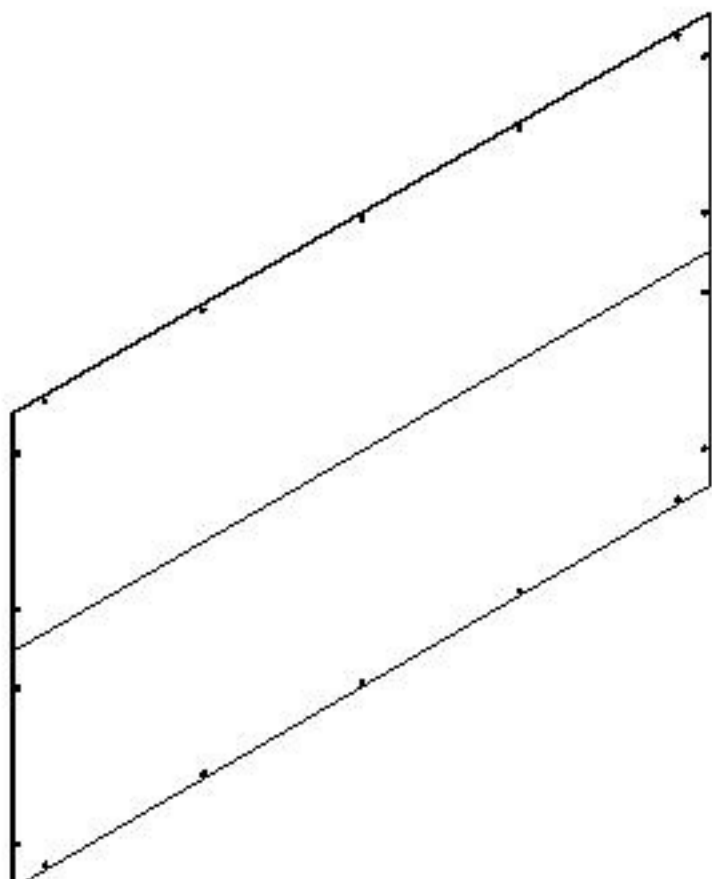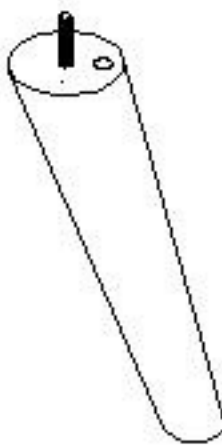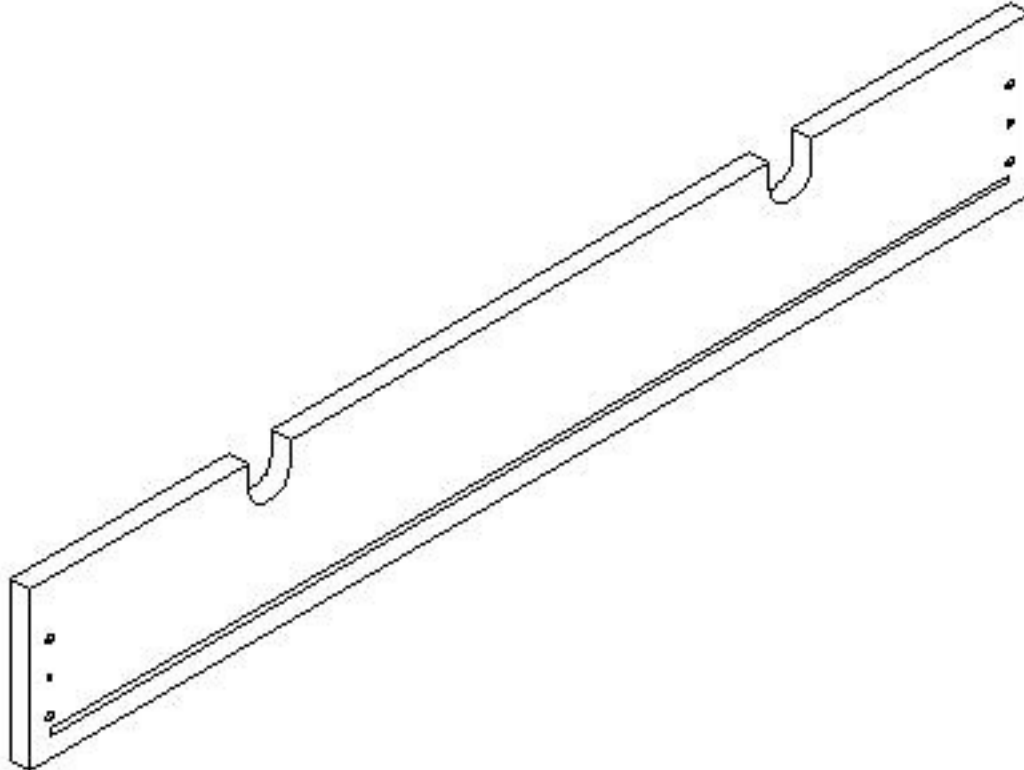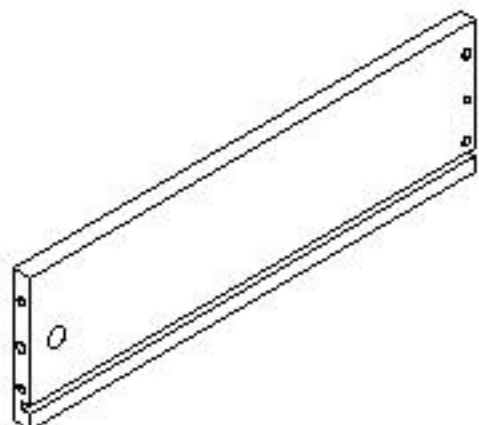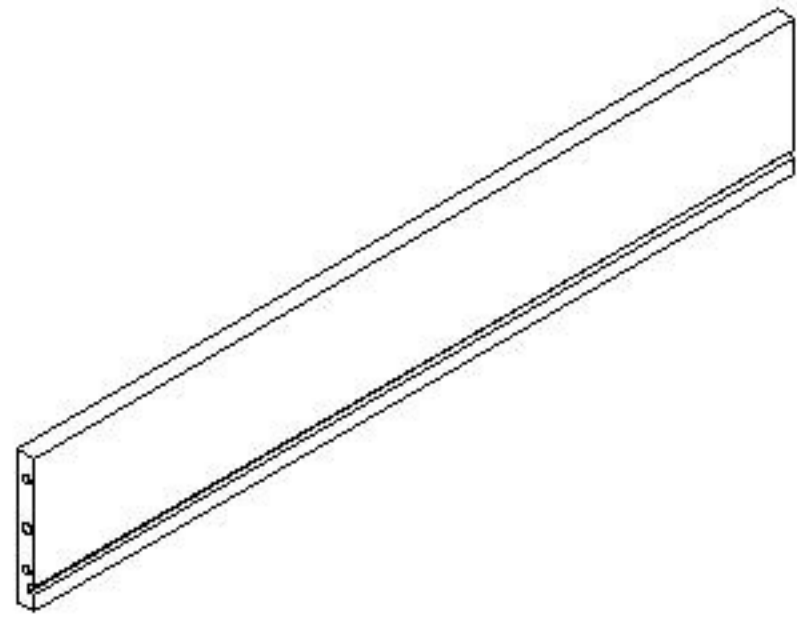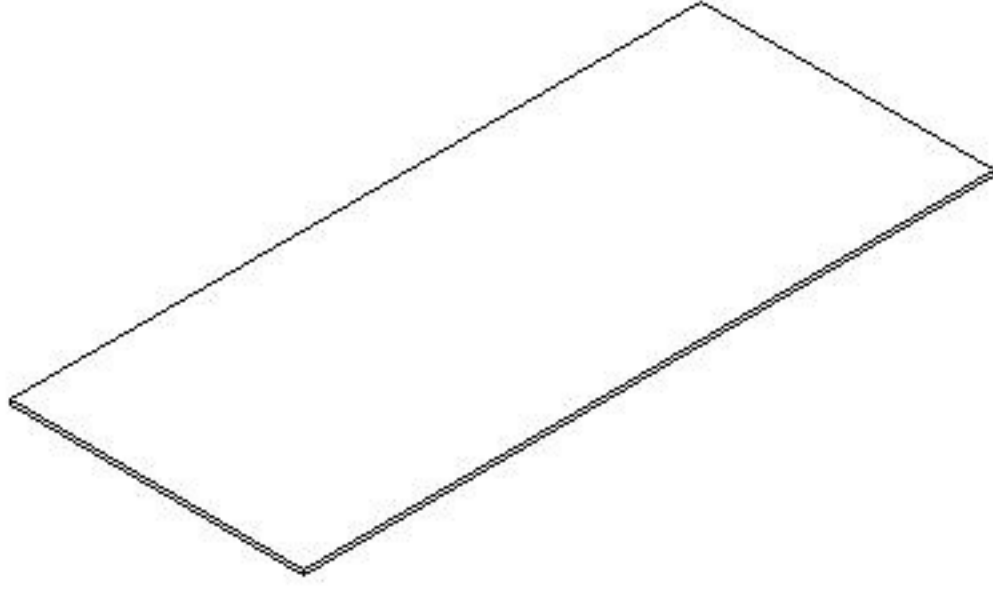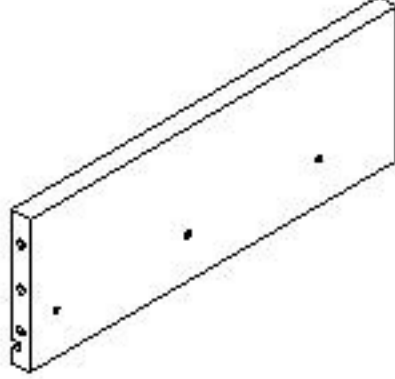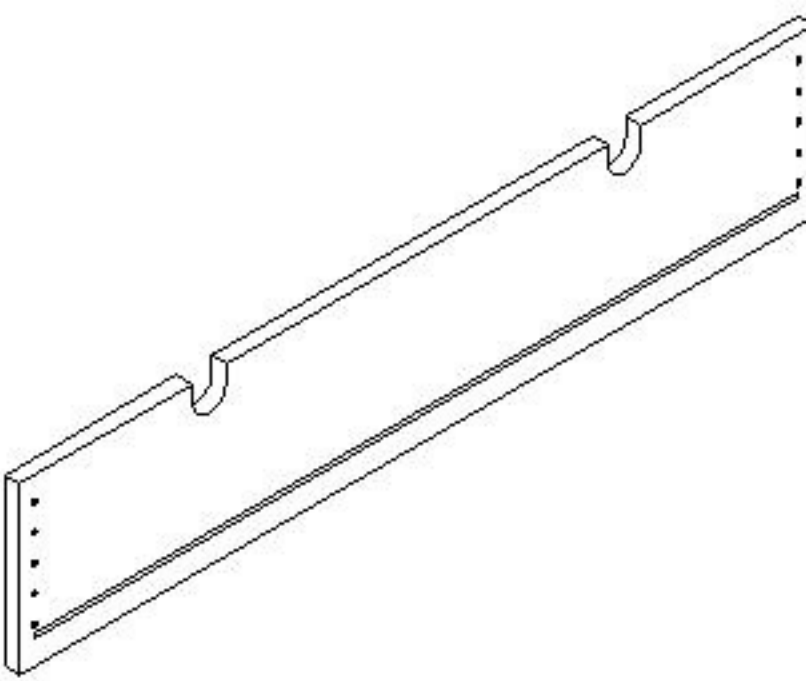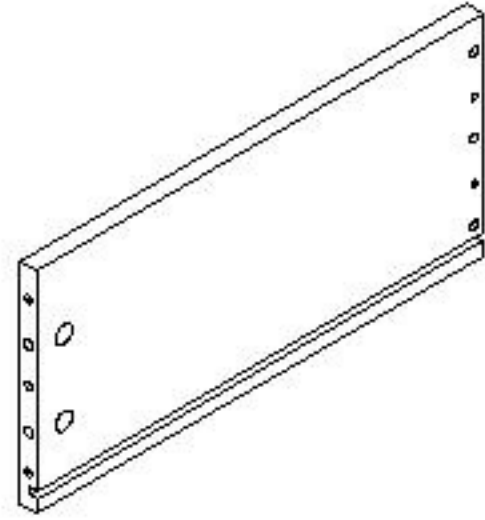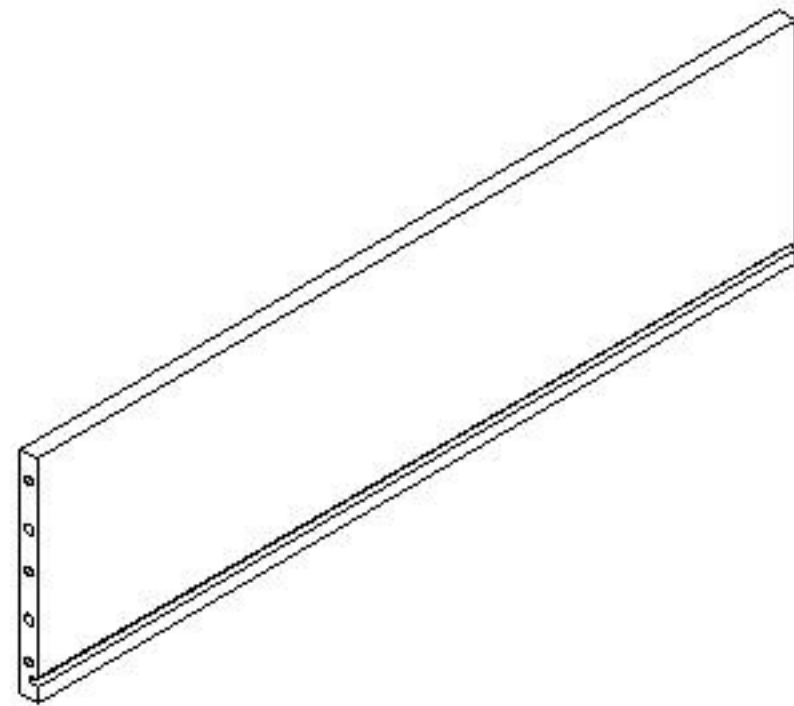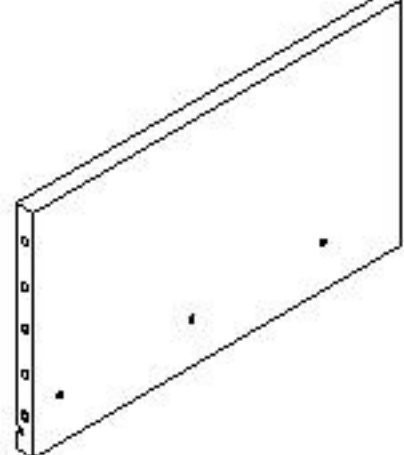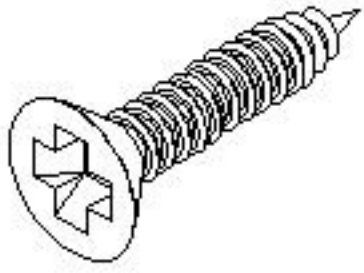


32pcs

V Cam Lock Cover
17*5

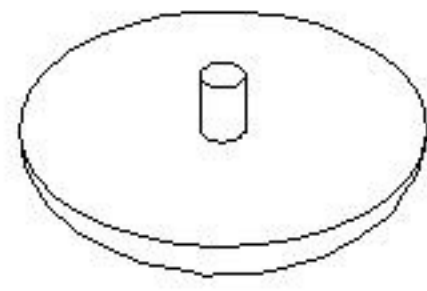


26pcs

W Panhead Screw
4*16mm (Black)

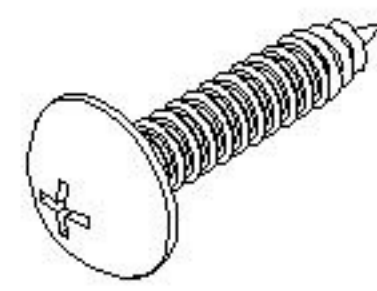


18pcs

X Flat Washer
M8

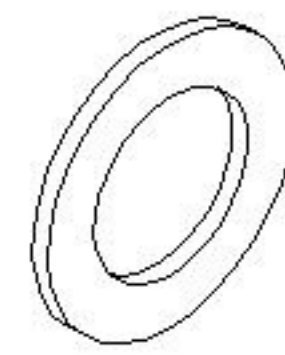


4pcs

Y Spring Washer
M8




4pcs

Z Hex Nut
M8




4pcs

AA Spanner
M12.8

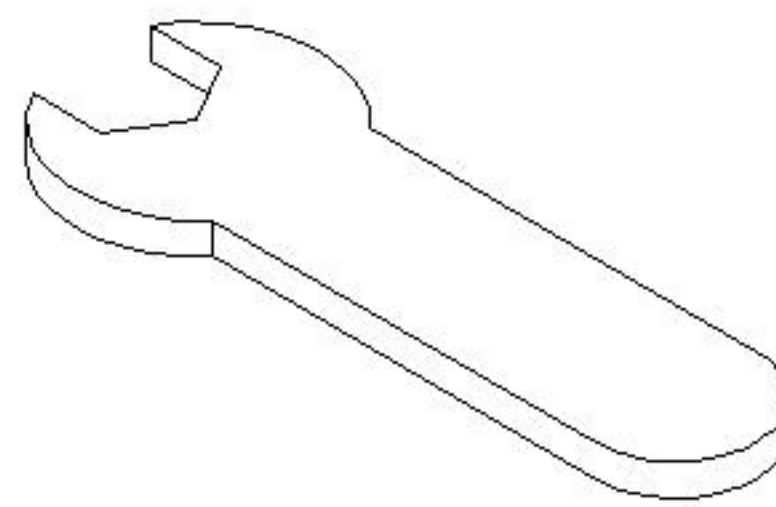


1pc

AB Screw
4*32mm

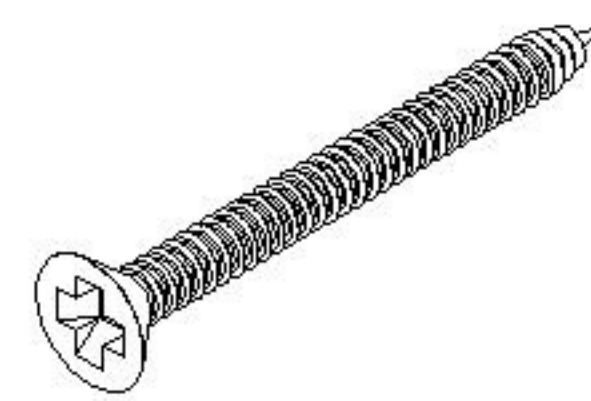

6pcs

AC Anti-Tipping Kit

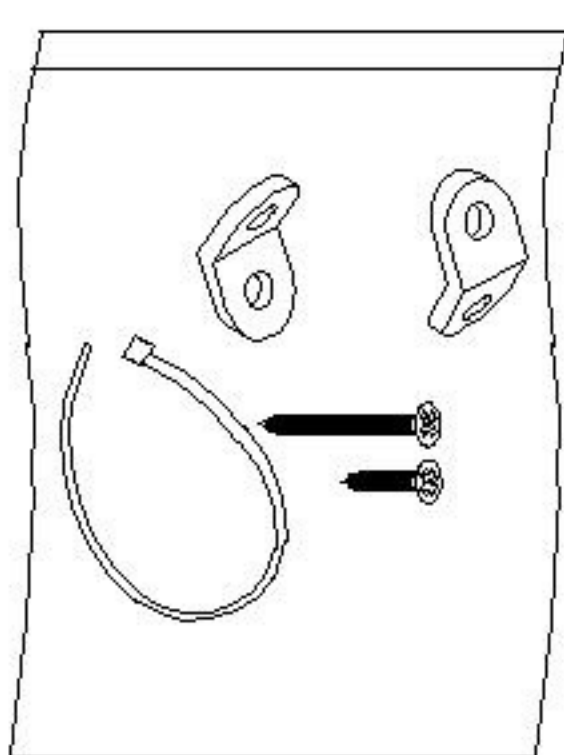


1set



This pages lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.



1

Insert and secure Cam Bolt (T) to Top Panel (A).

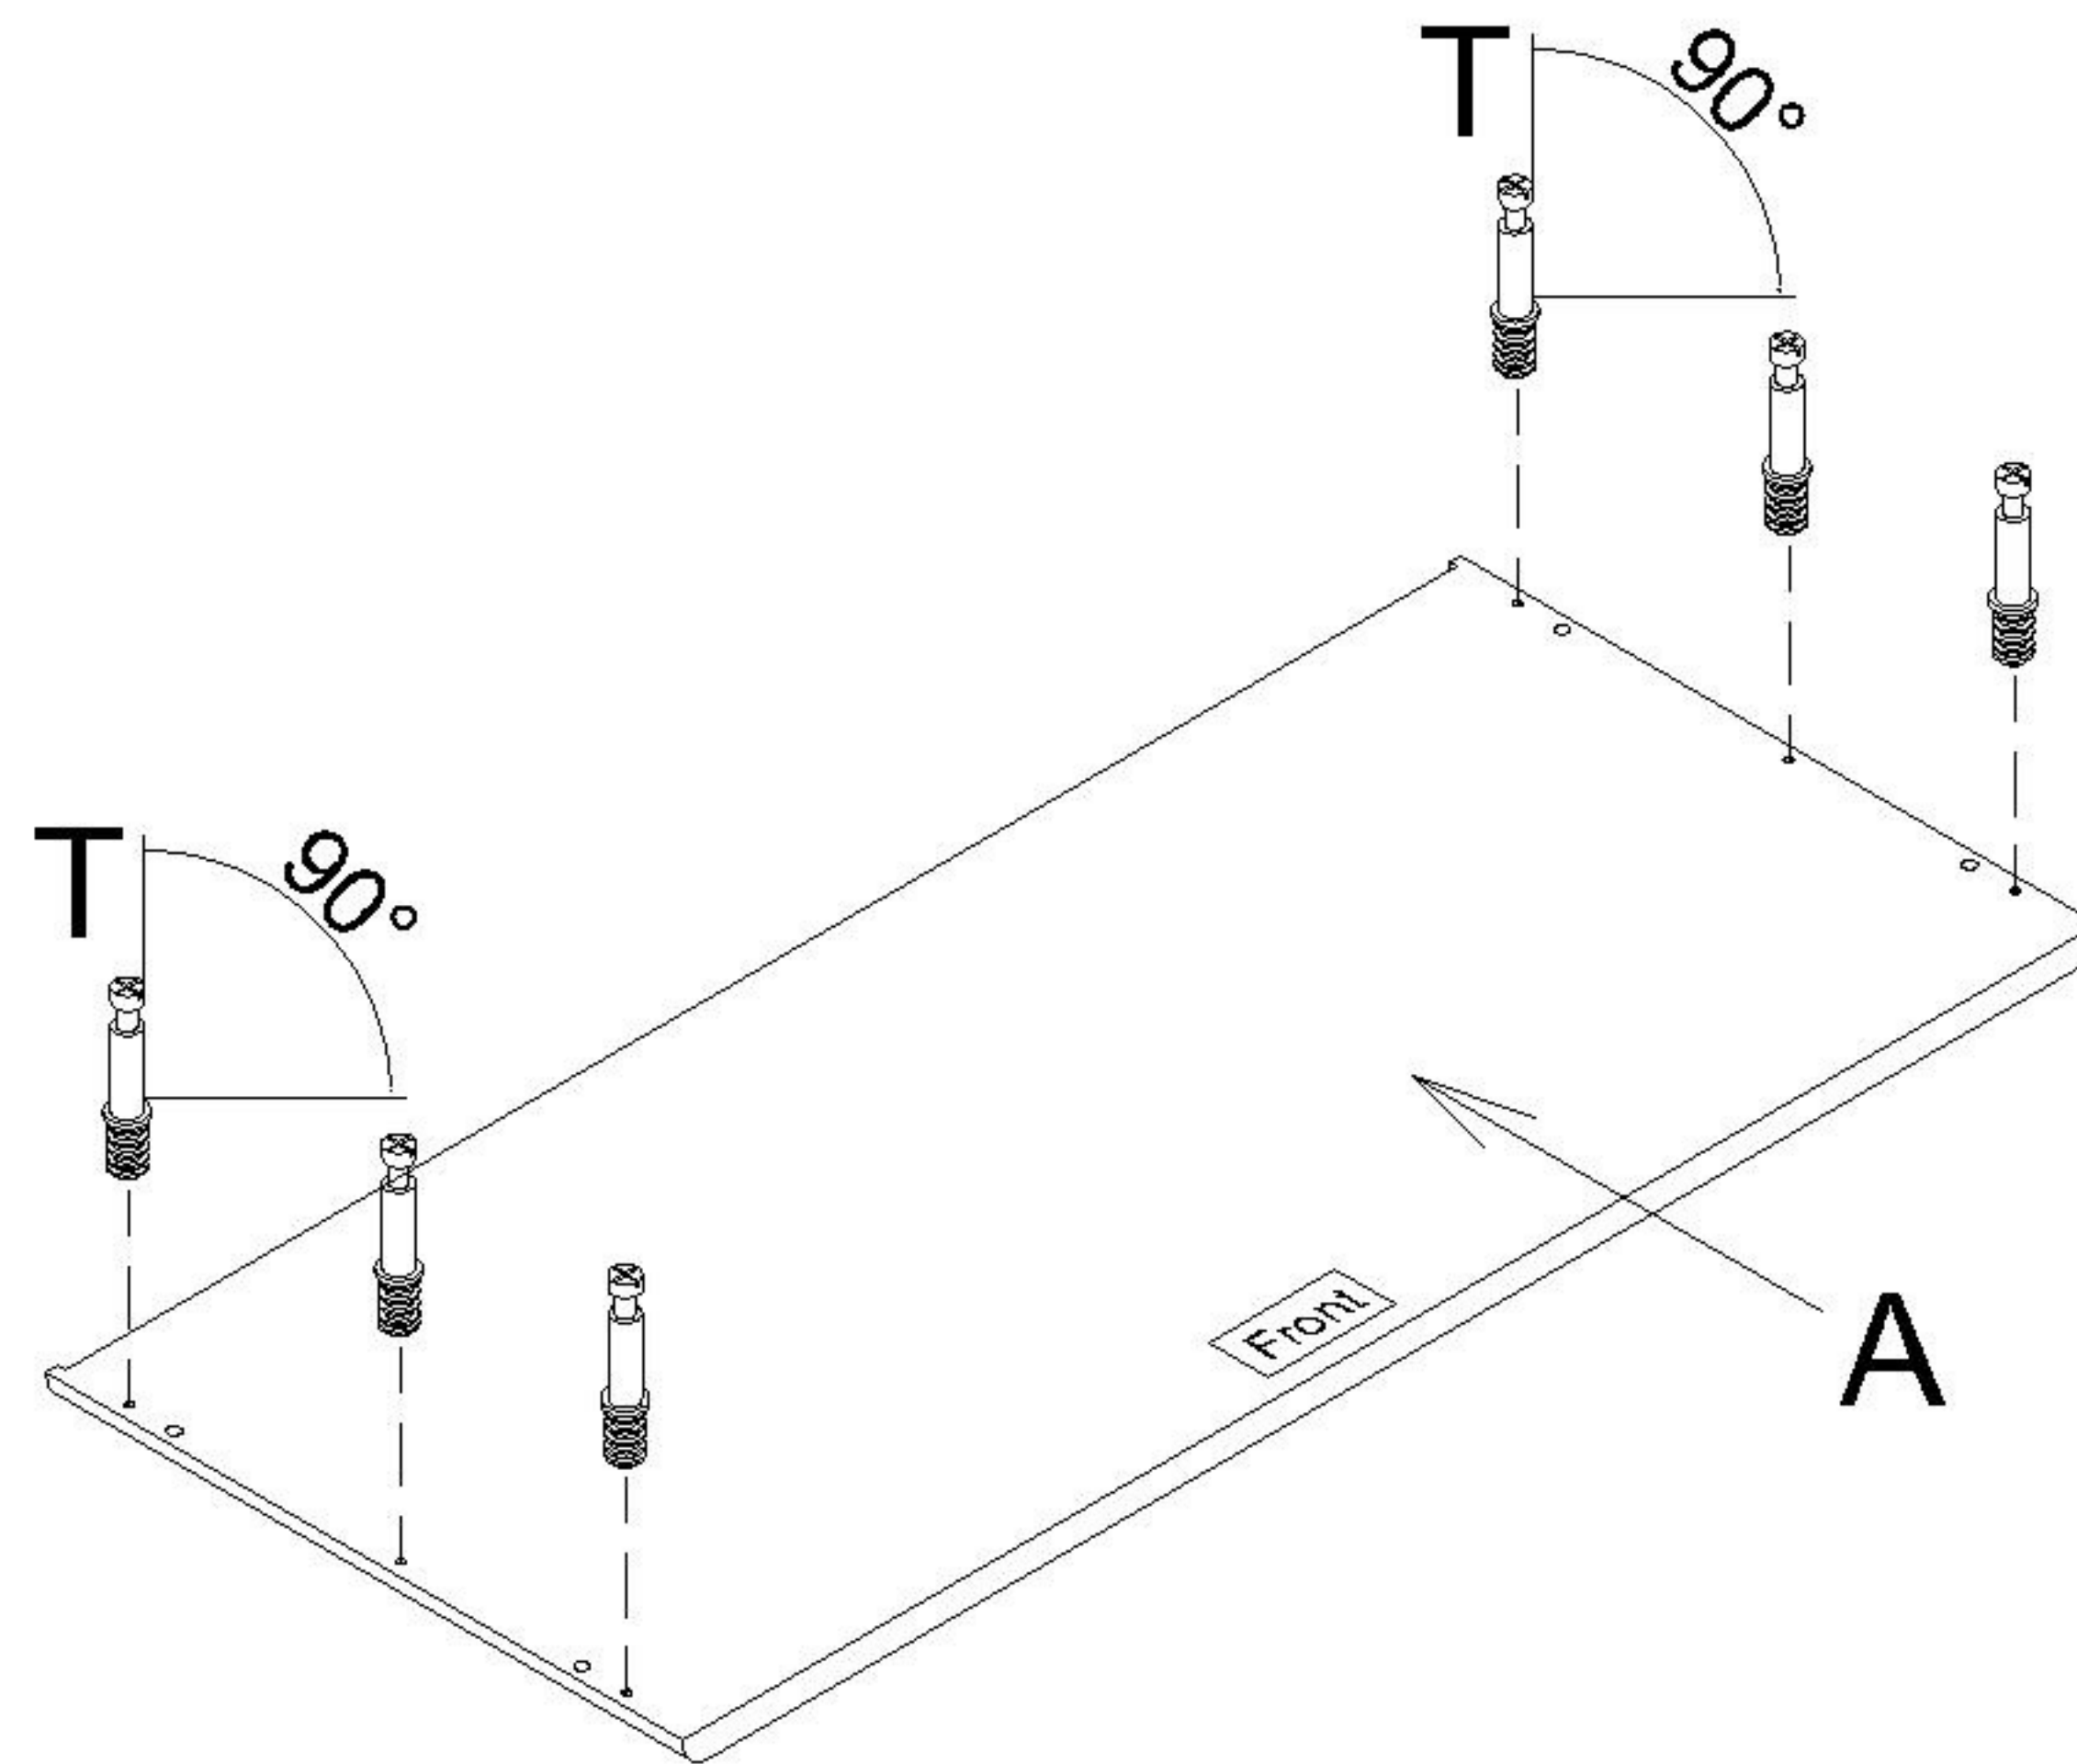**2**

Insert Dowel (R) to Left & Right Side Panel (B & C). Attach Cam Lock (S) to Left & Right Side Panel (B & C).

NOTE : - Make sure arrows on each Cam Lock points towards nearest edge with holes.


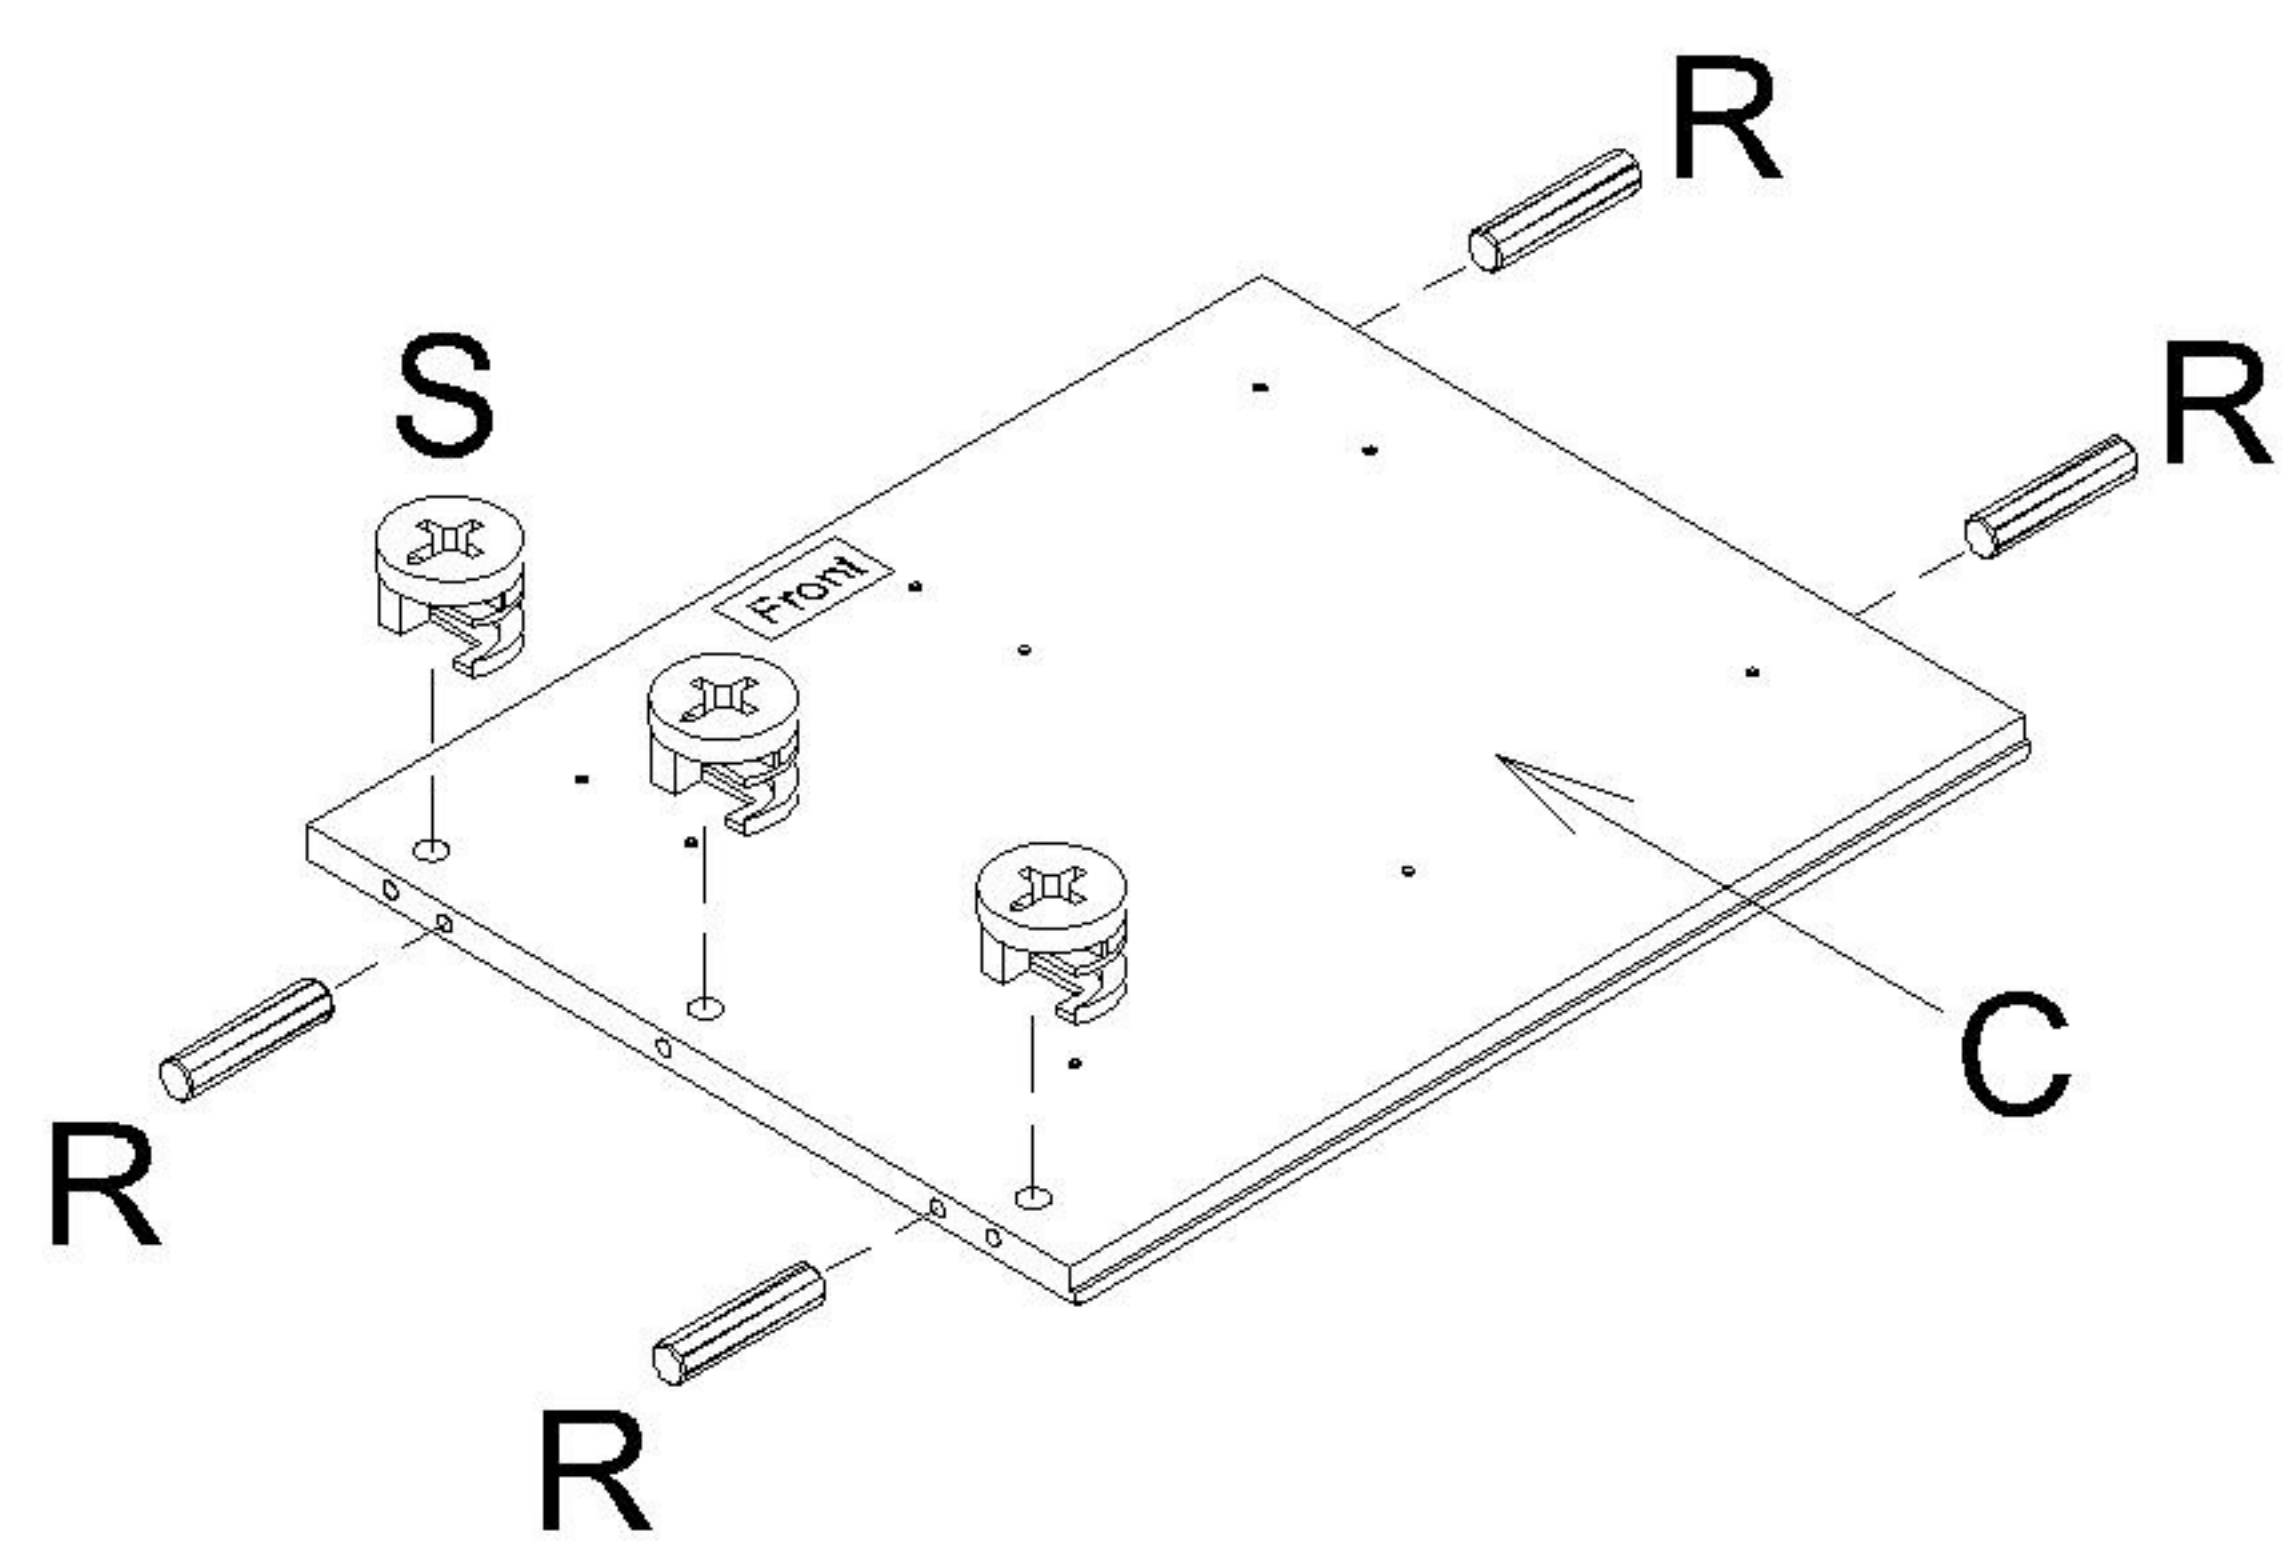
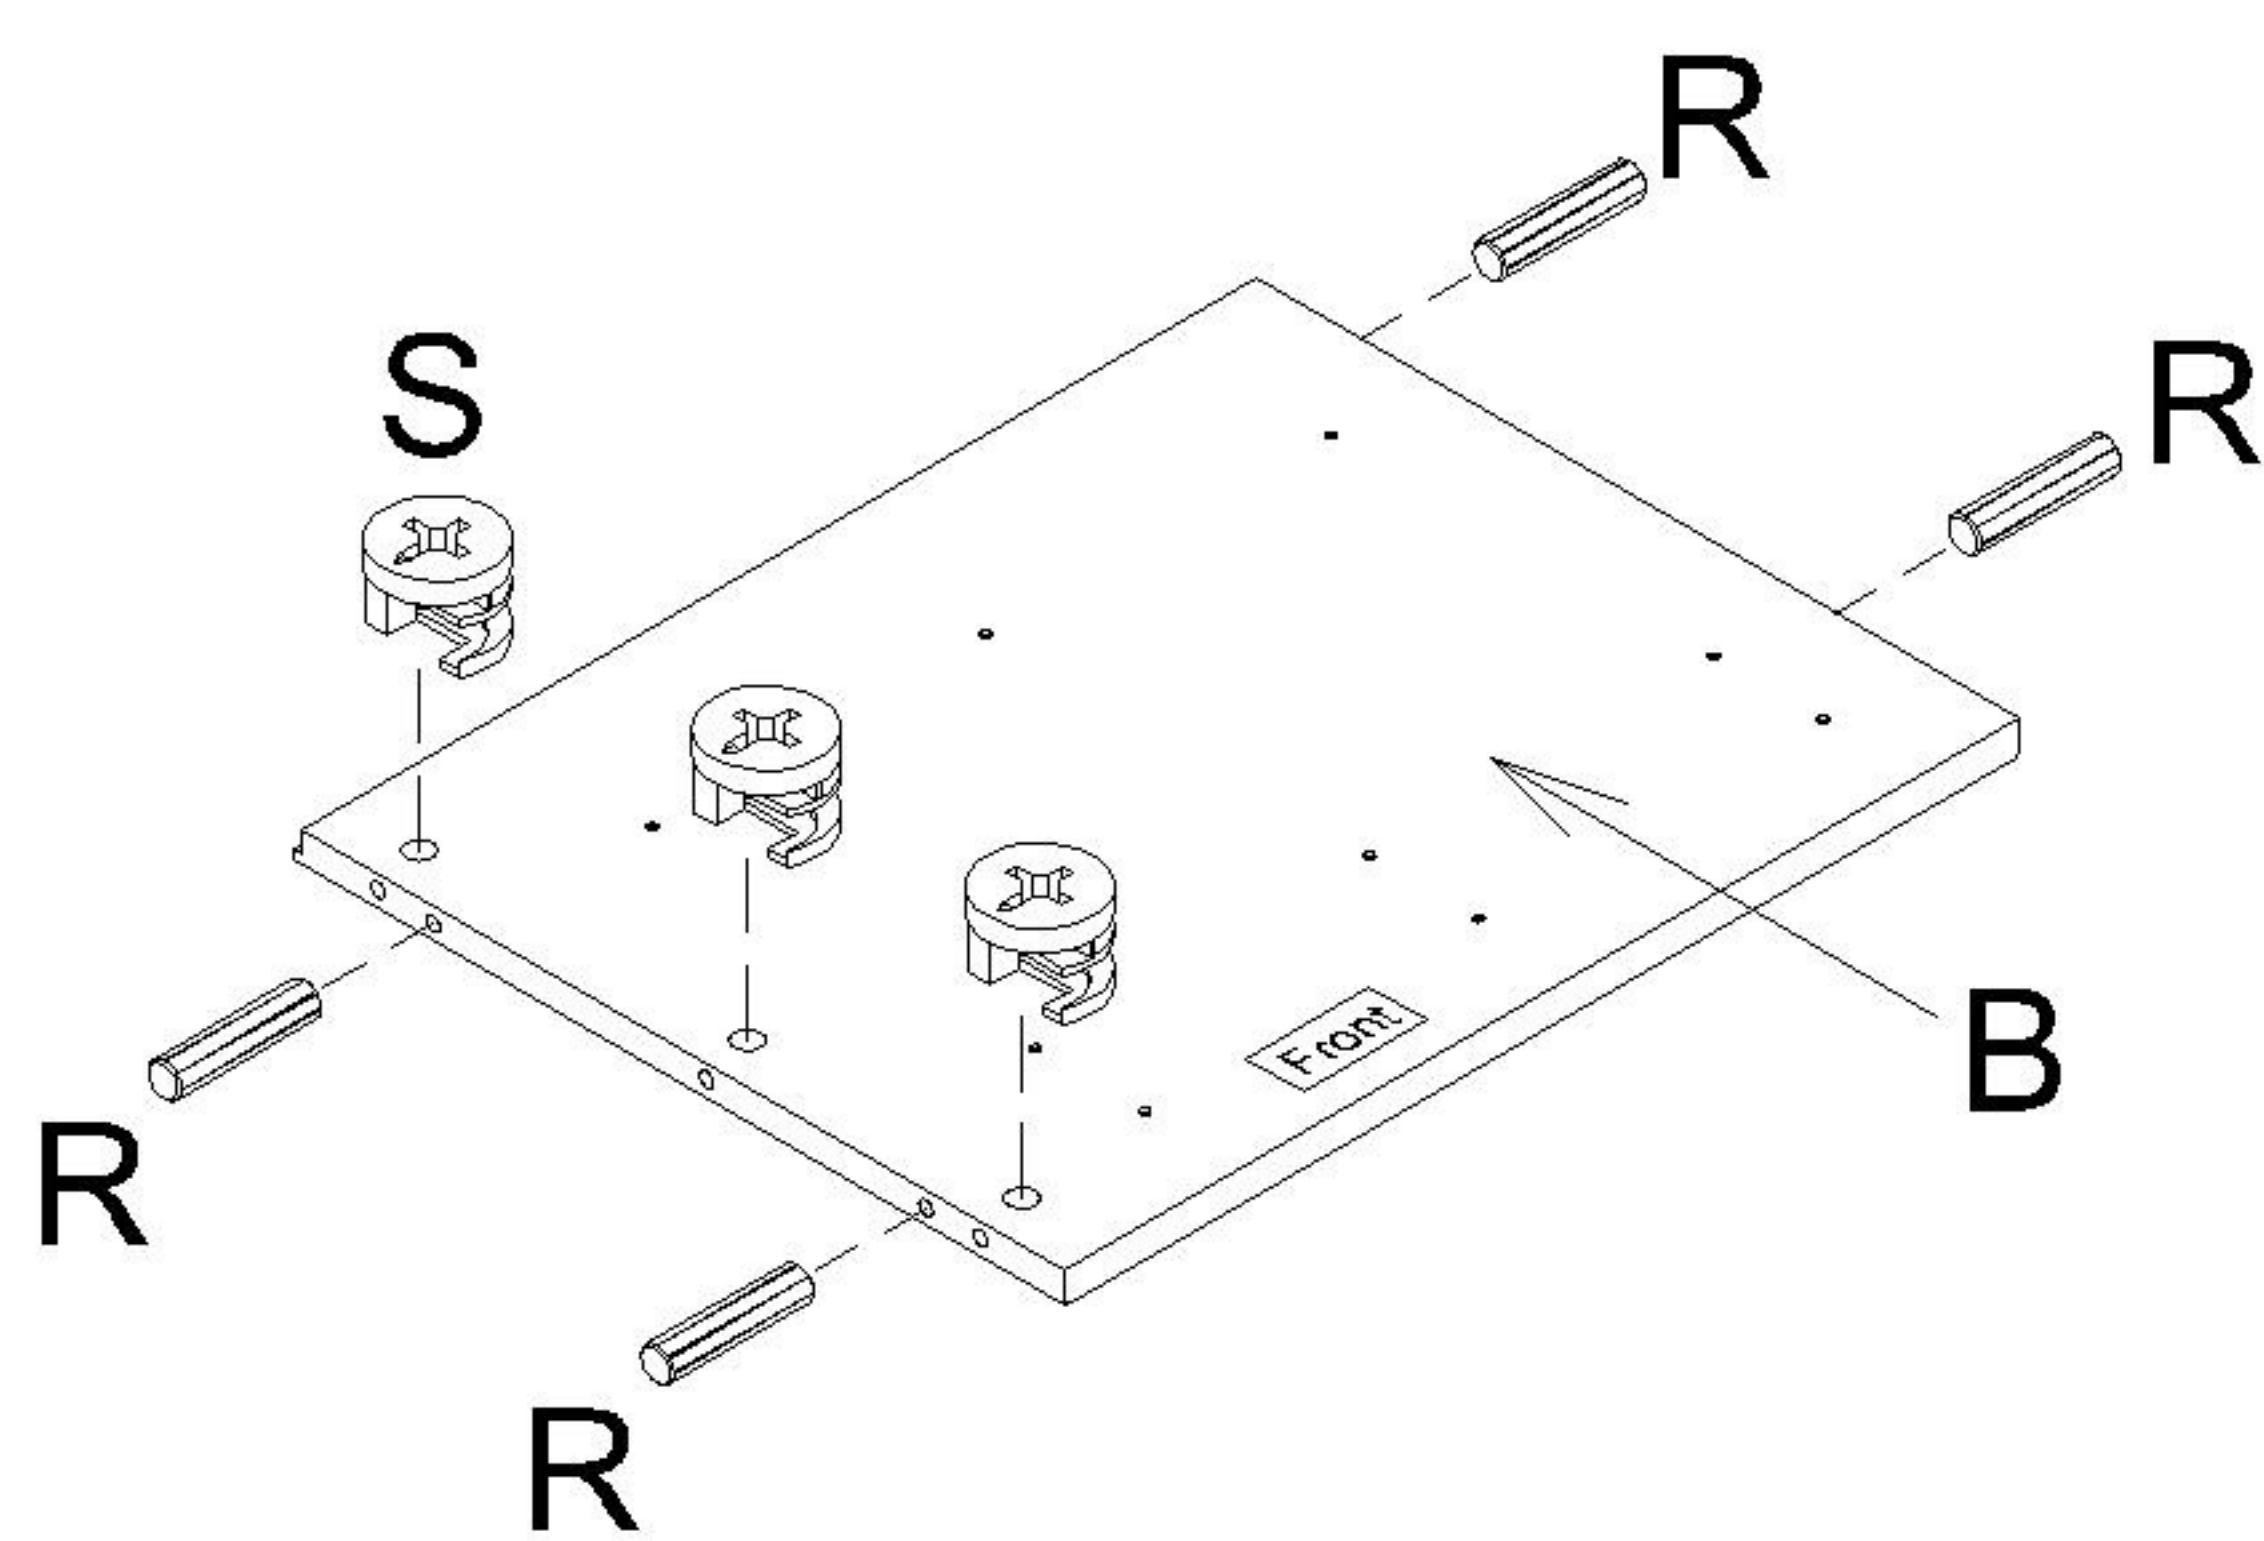


3



Attach Extension Runner (Q) to Left & Right Side Panel (B & C) using Screw (P) to secure.

NOTE : - Runner roller should be towards the front of the panel.

- Screw (P) should be assembled from the front of the runner. Start from P¹, P² then P³.
- Make sure the screws are installed vertically without slant to ensure screw sits properly in the hole.

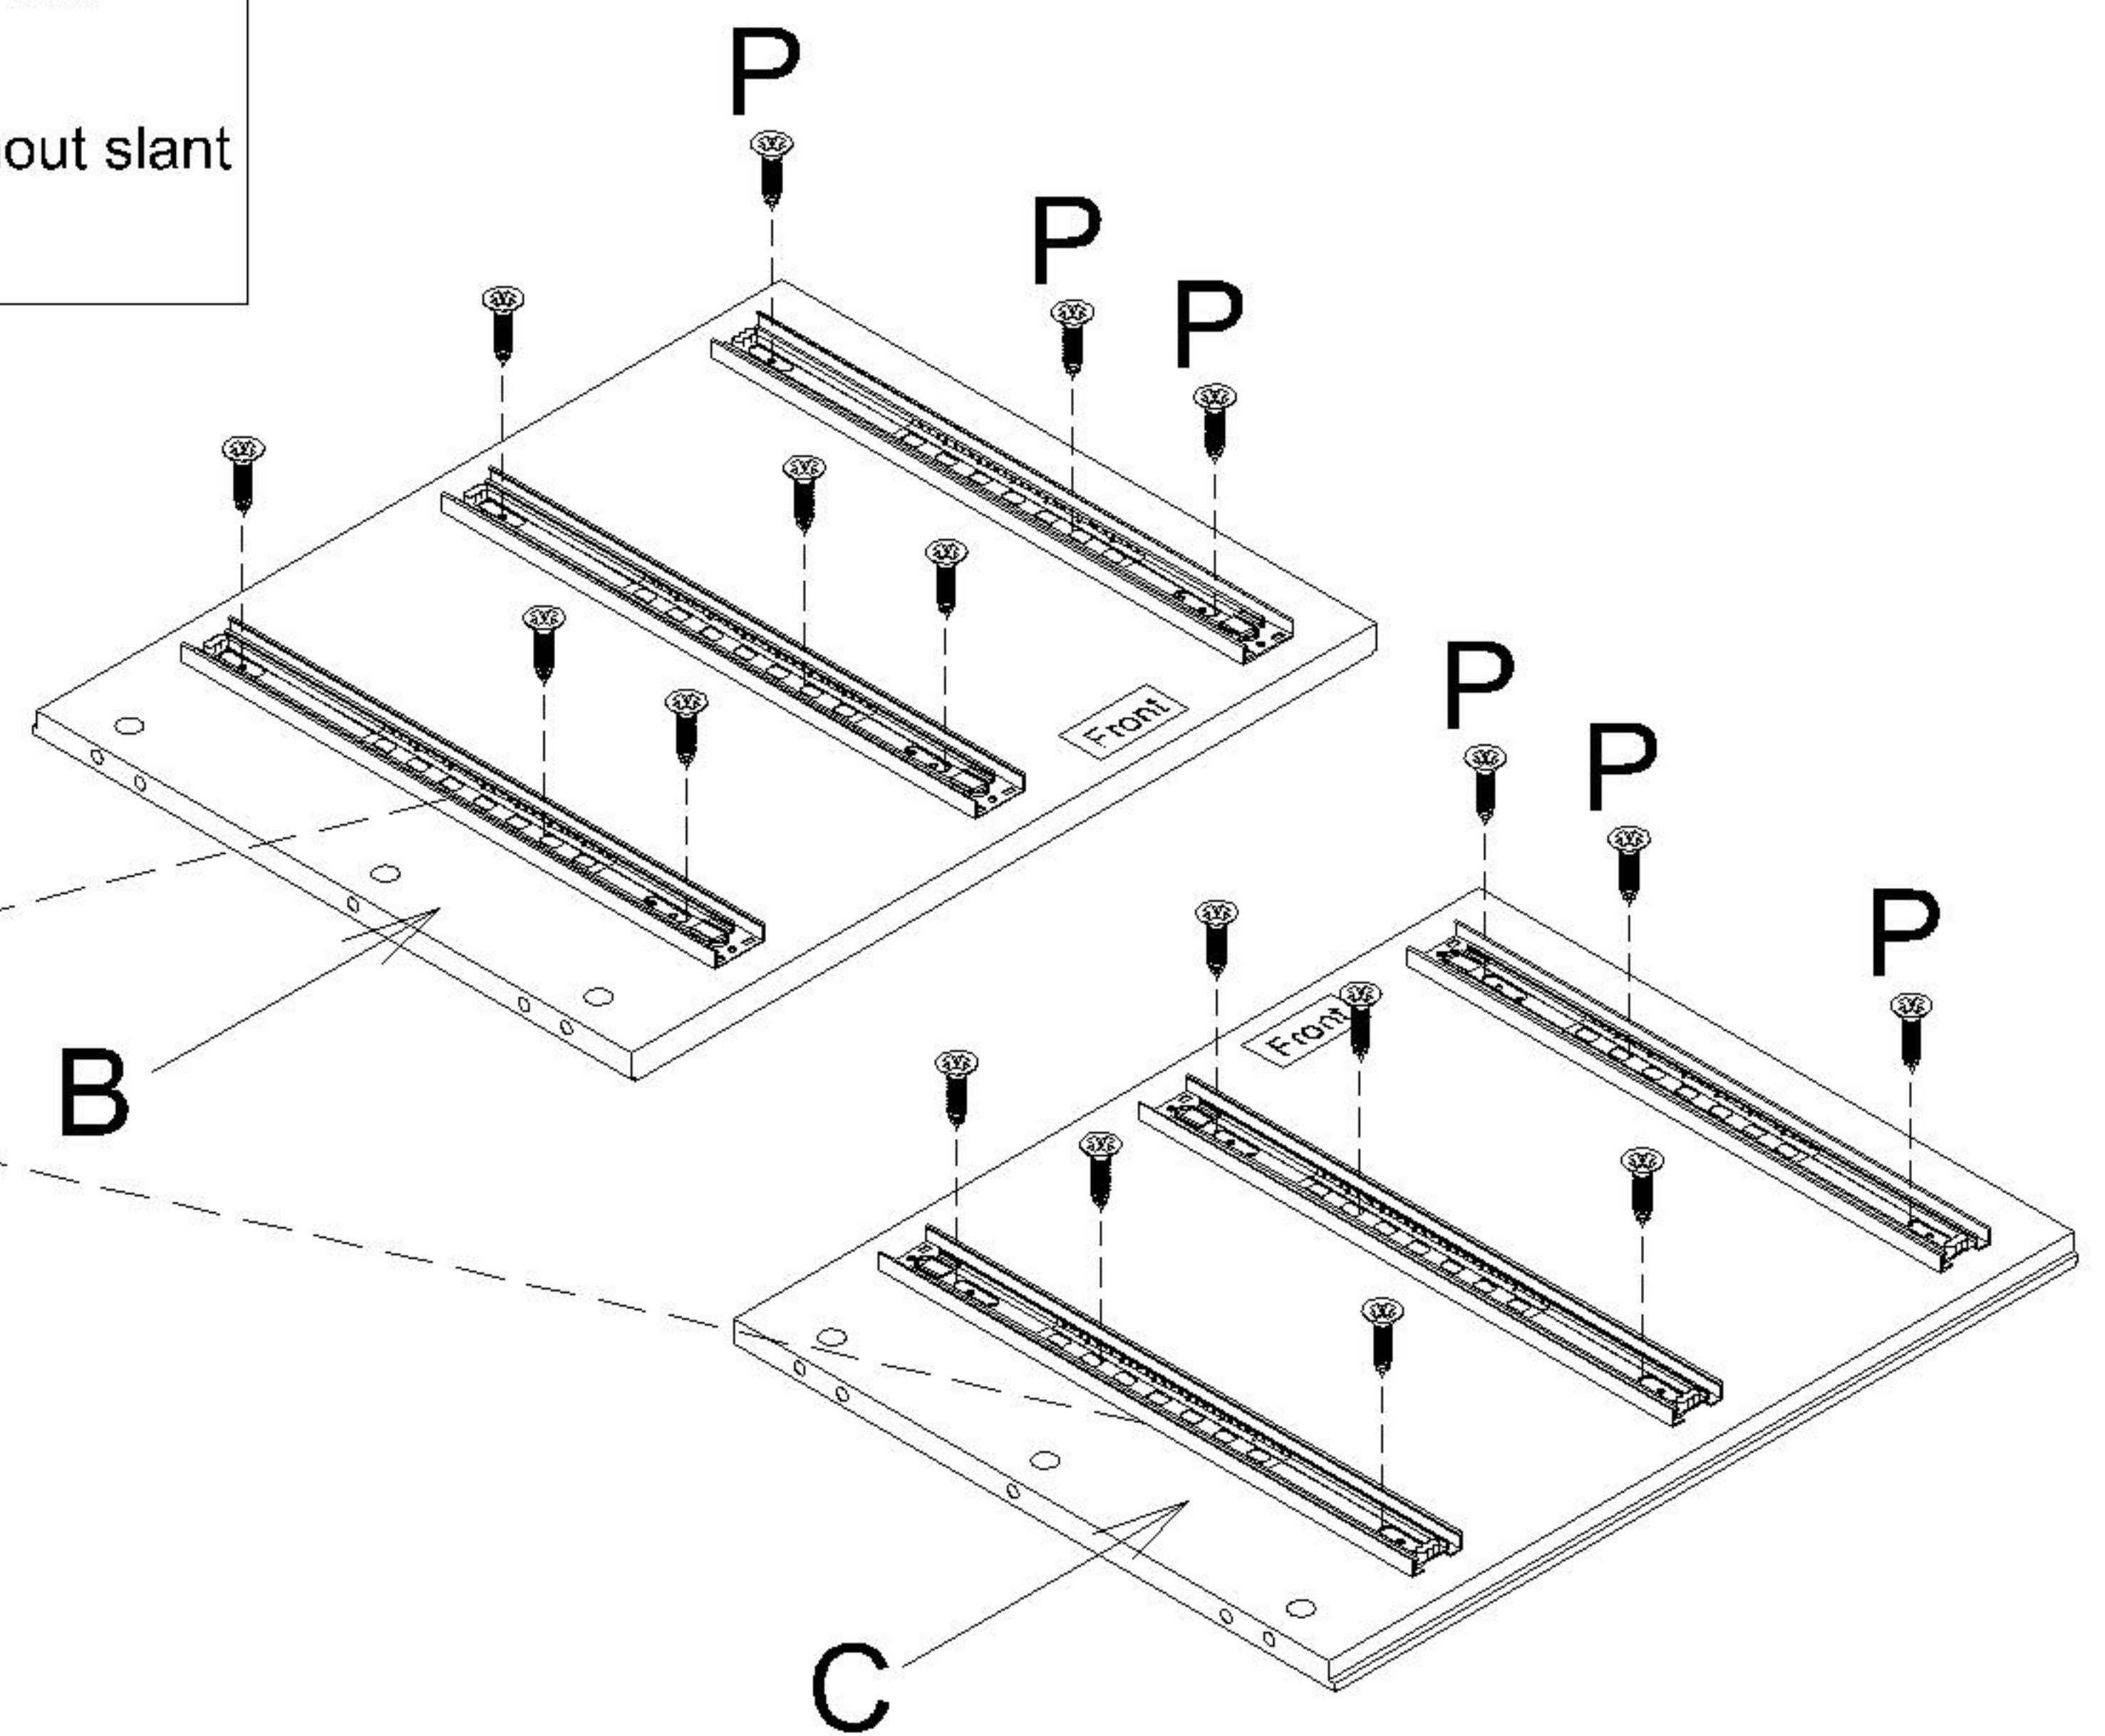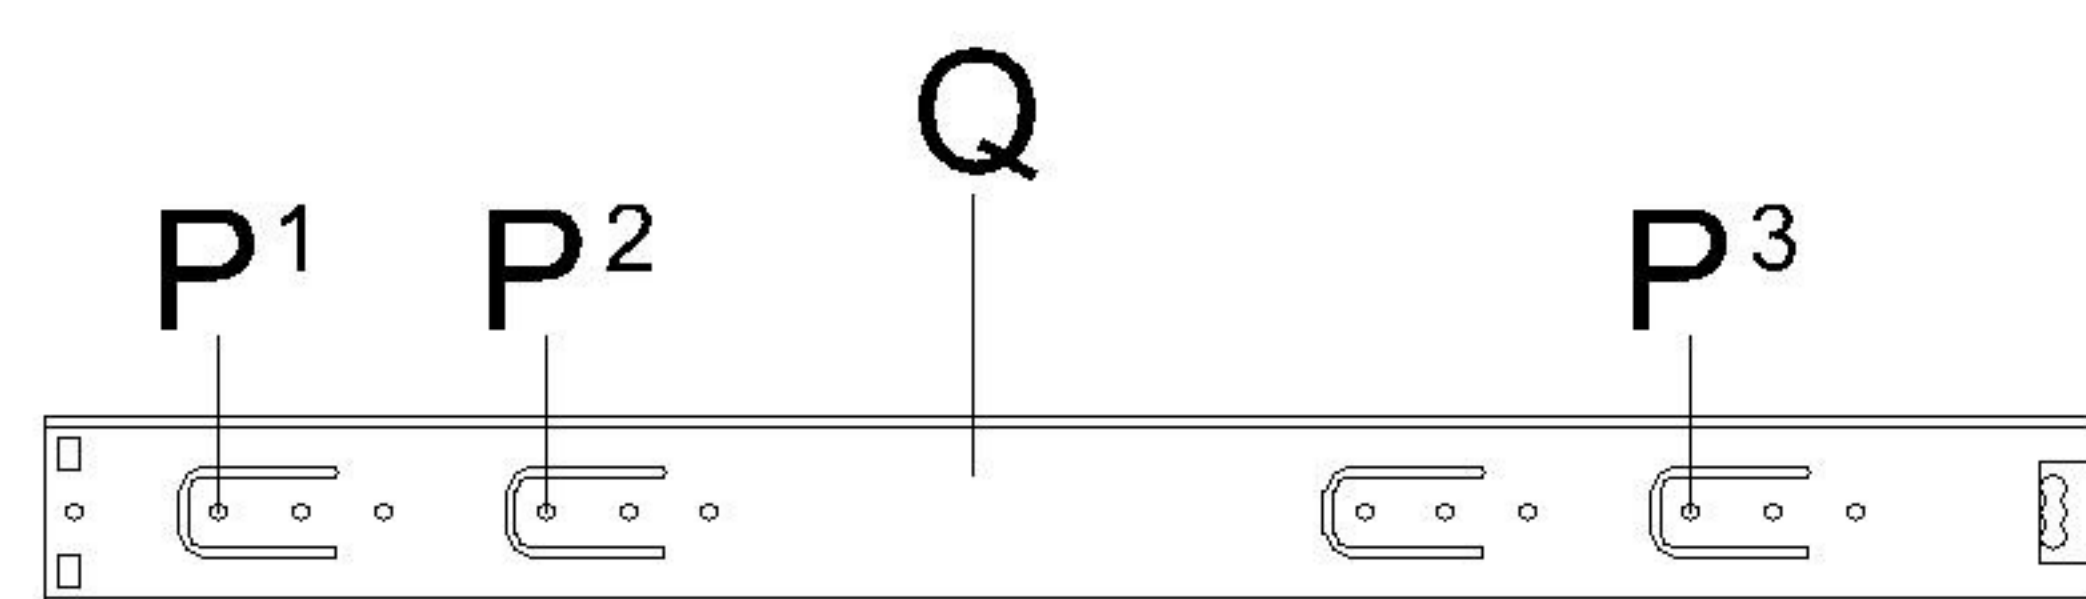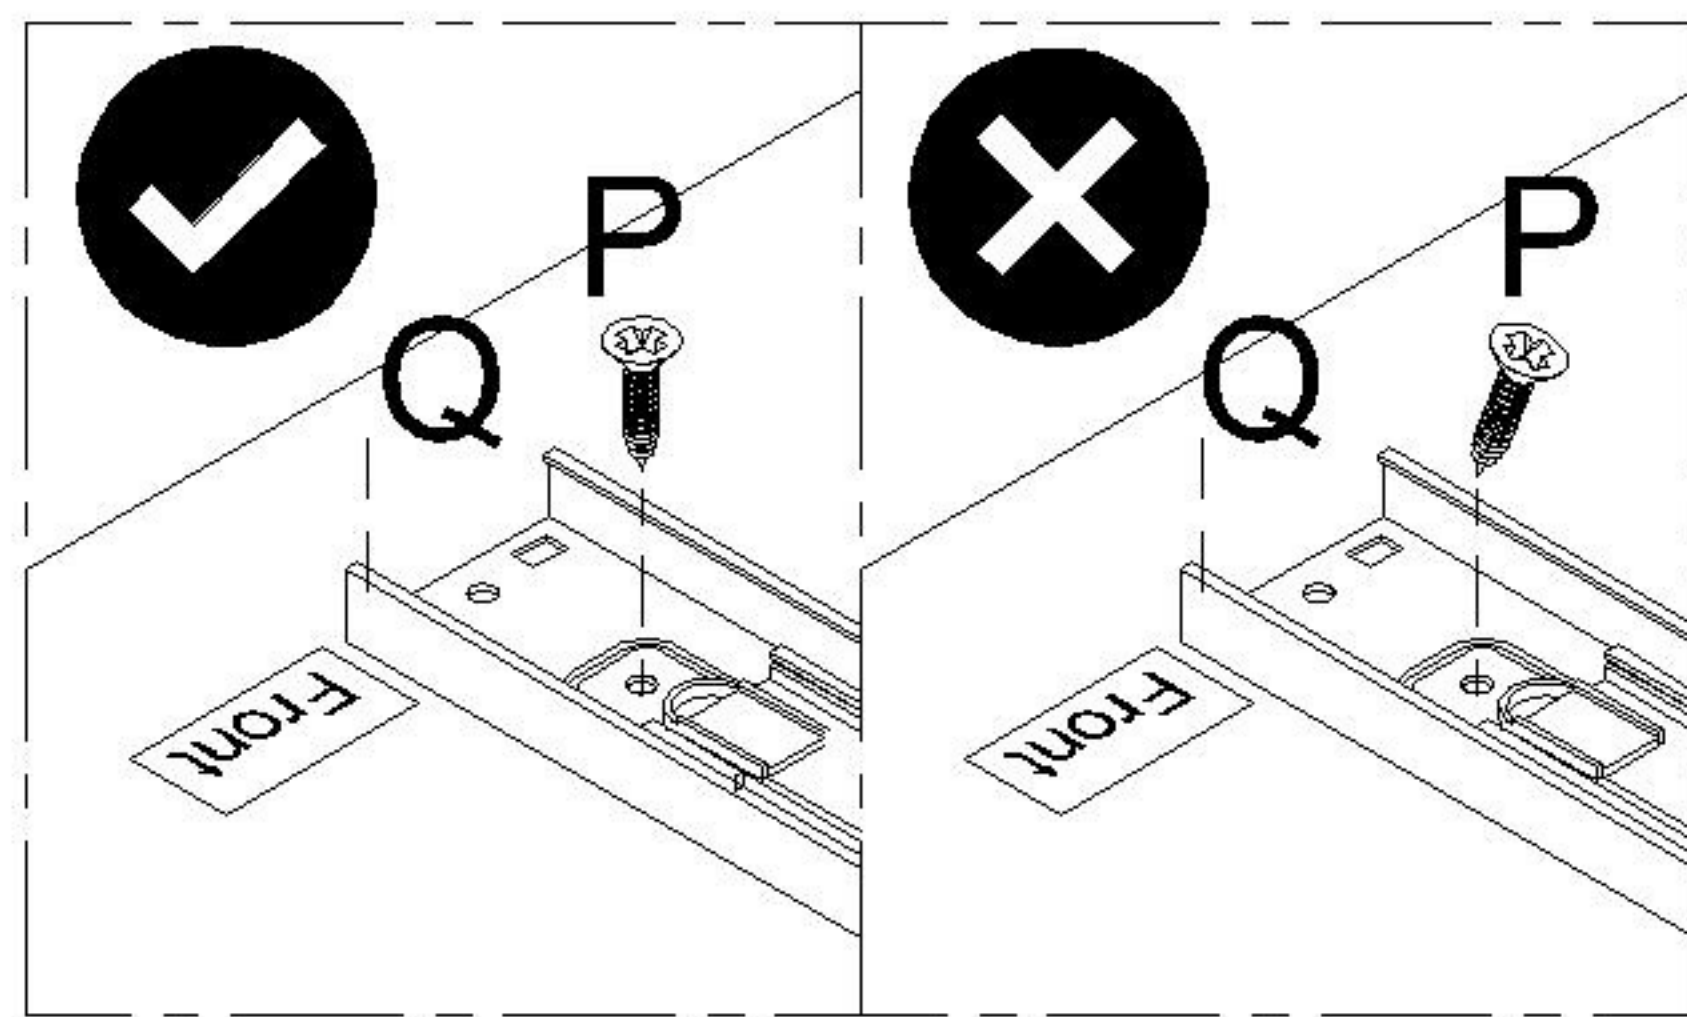


EXTENSION RUNNER DISASSEMBLE STEPS:

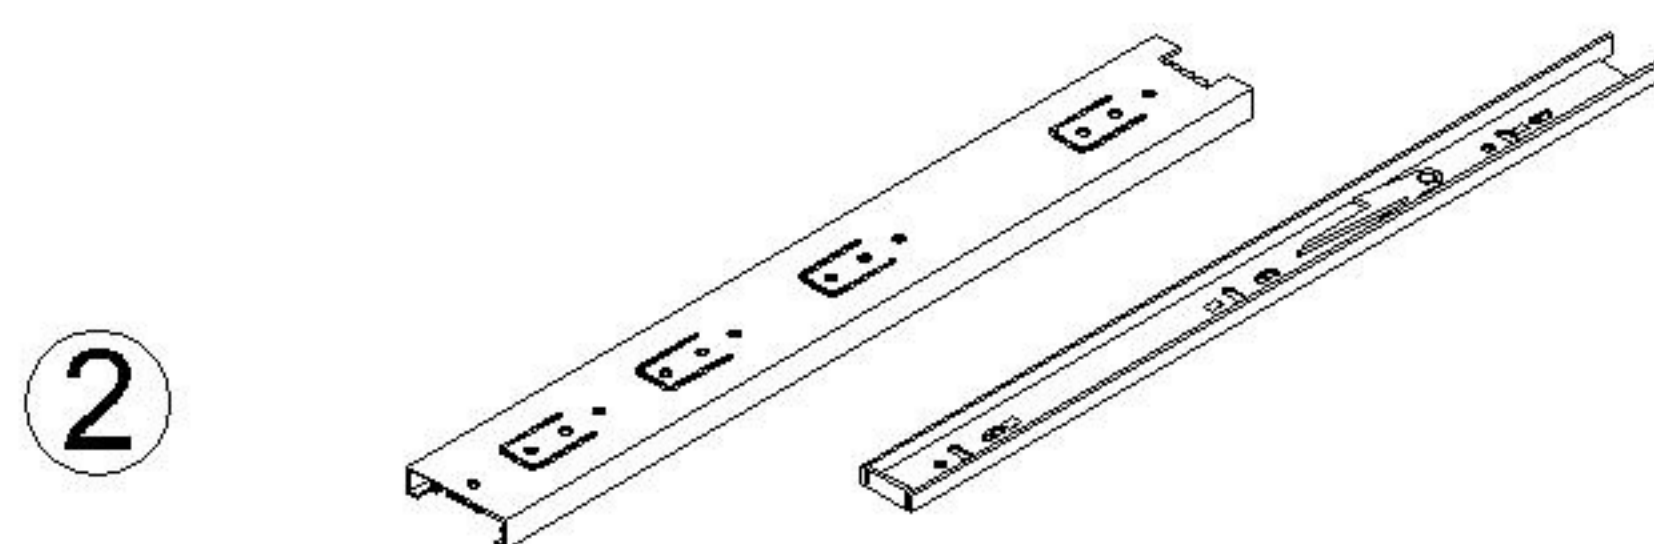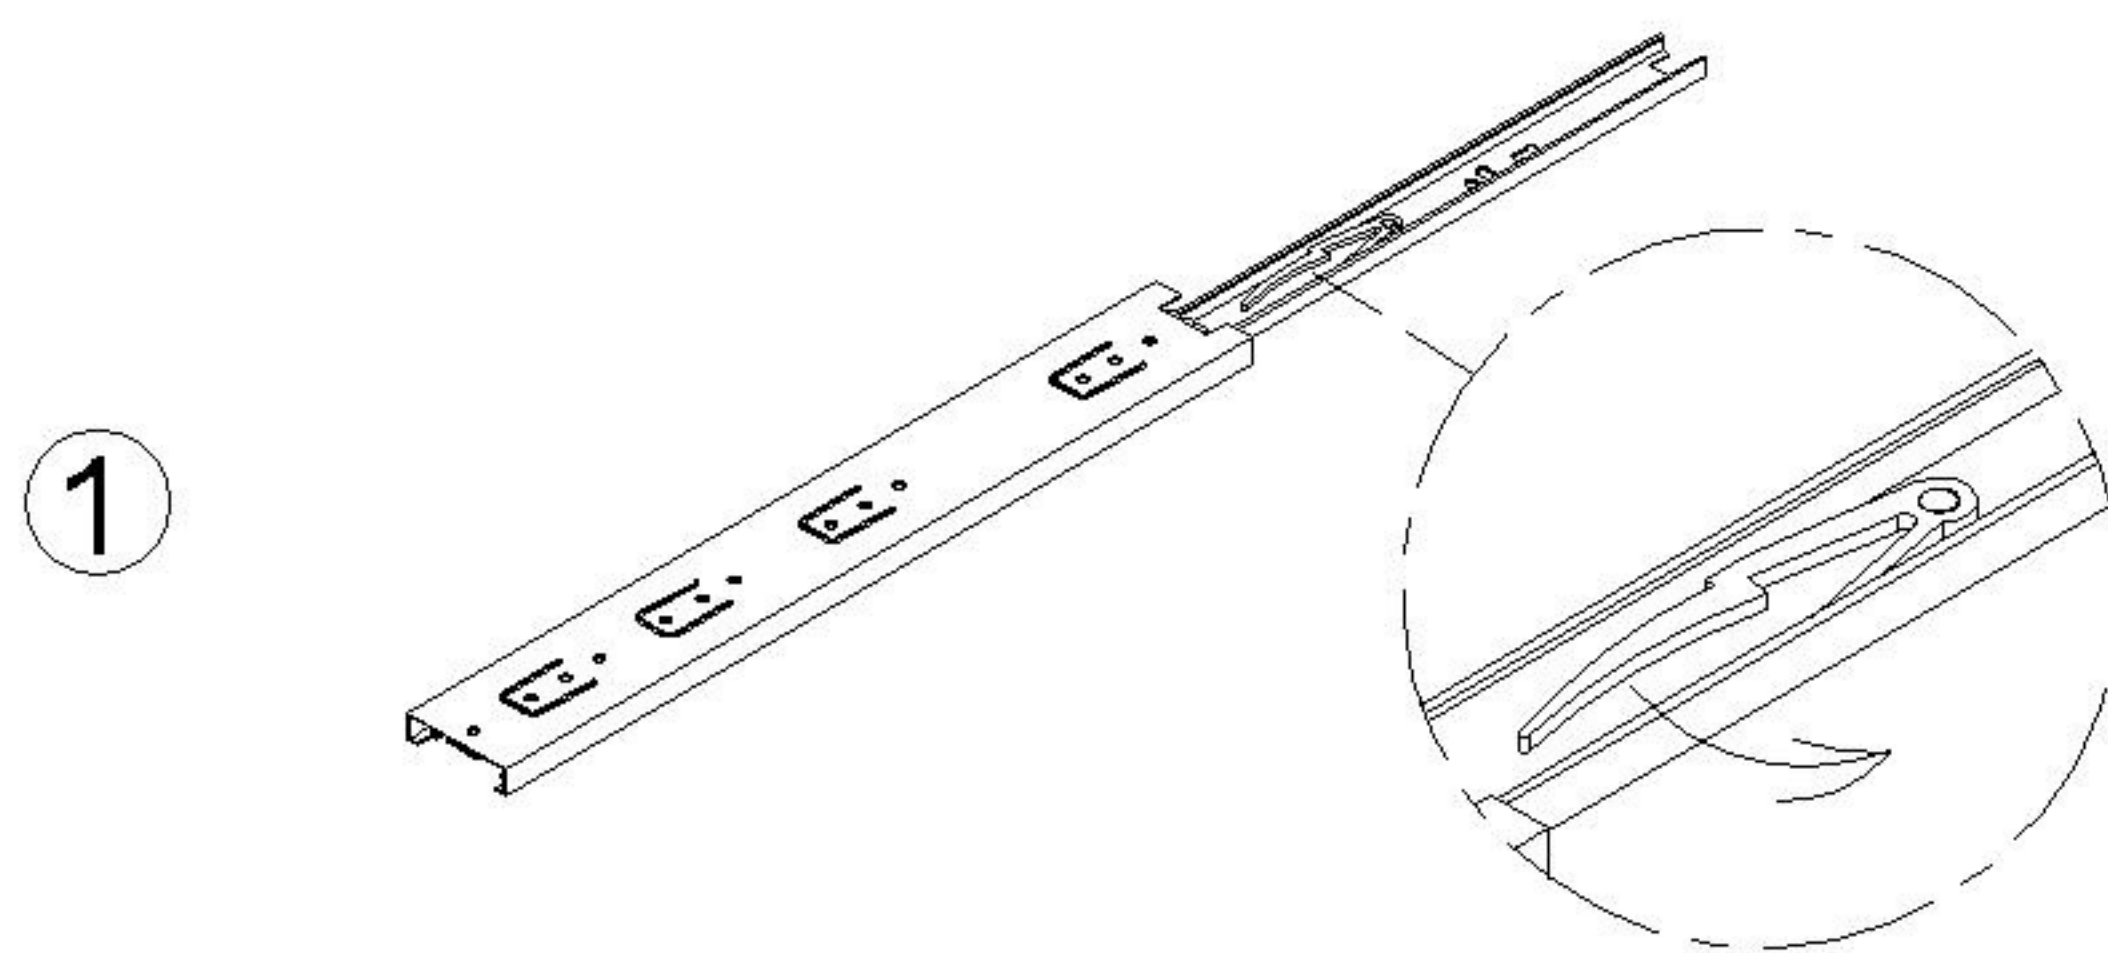

Disassemble the glides to tighten on panel. Glides will be disassembled in 2 parts, 1 part to fix on side panel and the other part to fix on drawer side.


4

Attach Dowel (R) to Post (F).

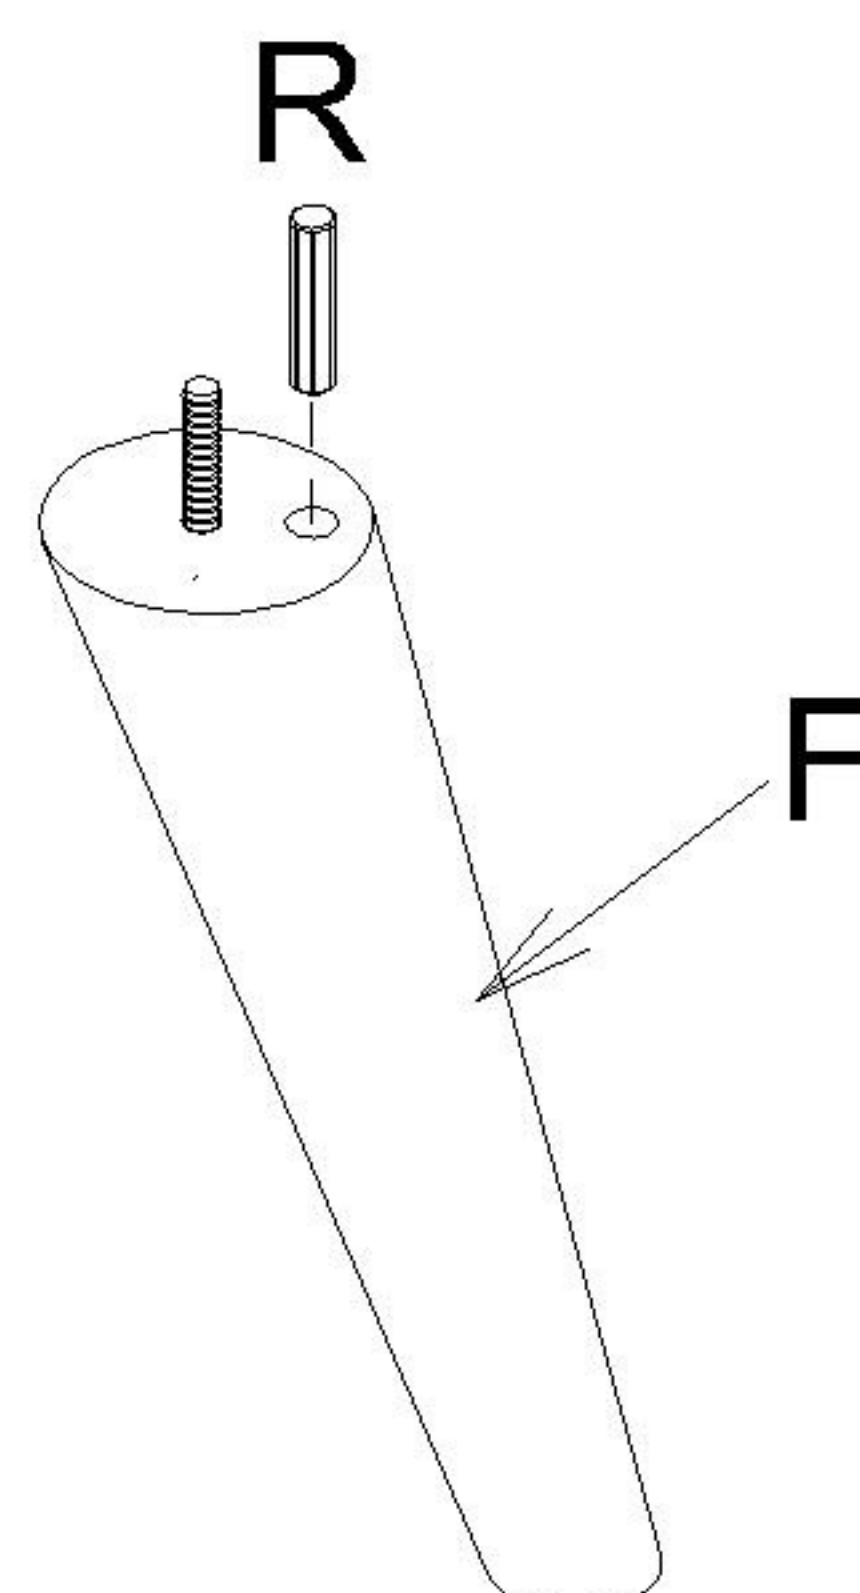


5


Attach Bottom Frame (D) to Left & Right Side Panel (B & C) and secure using Screw (AB).

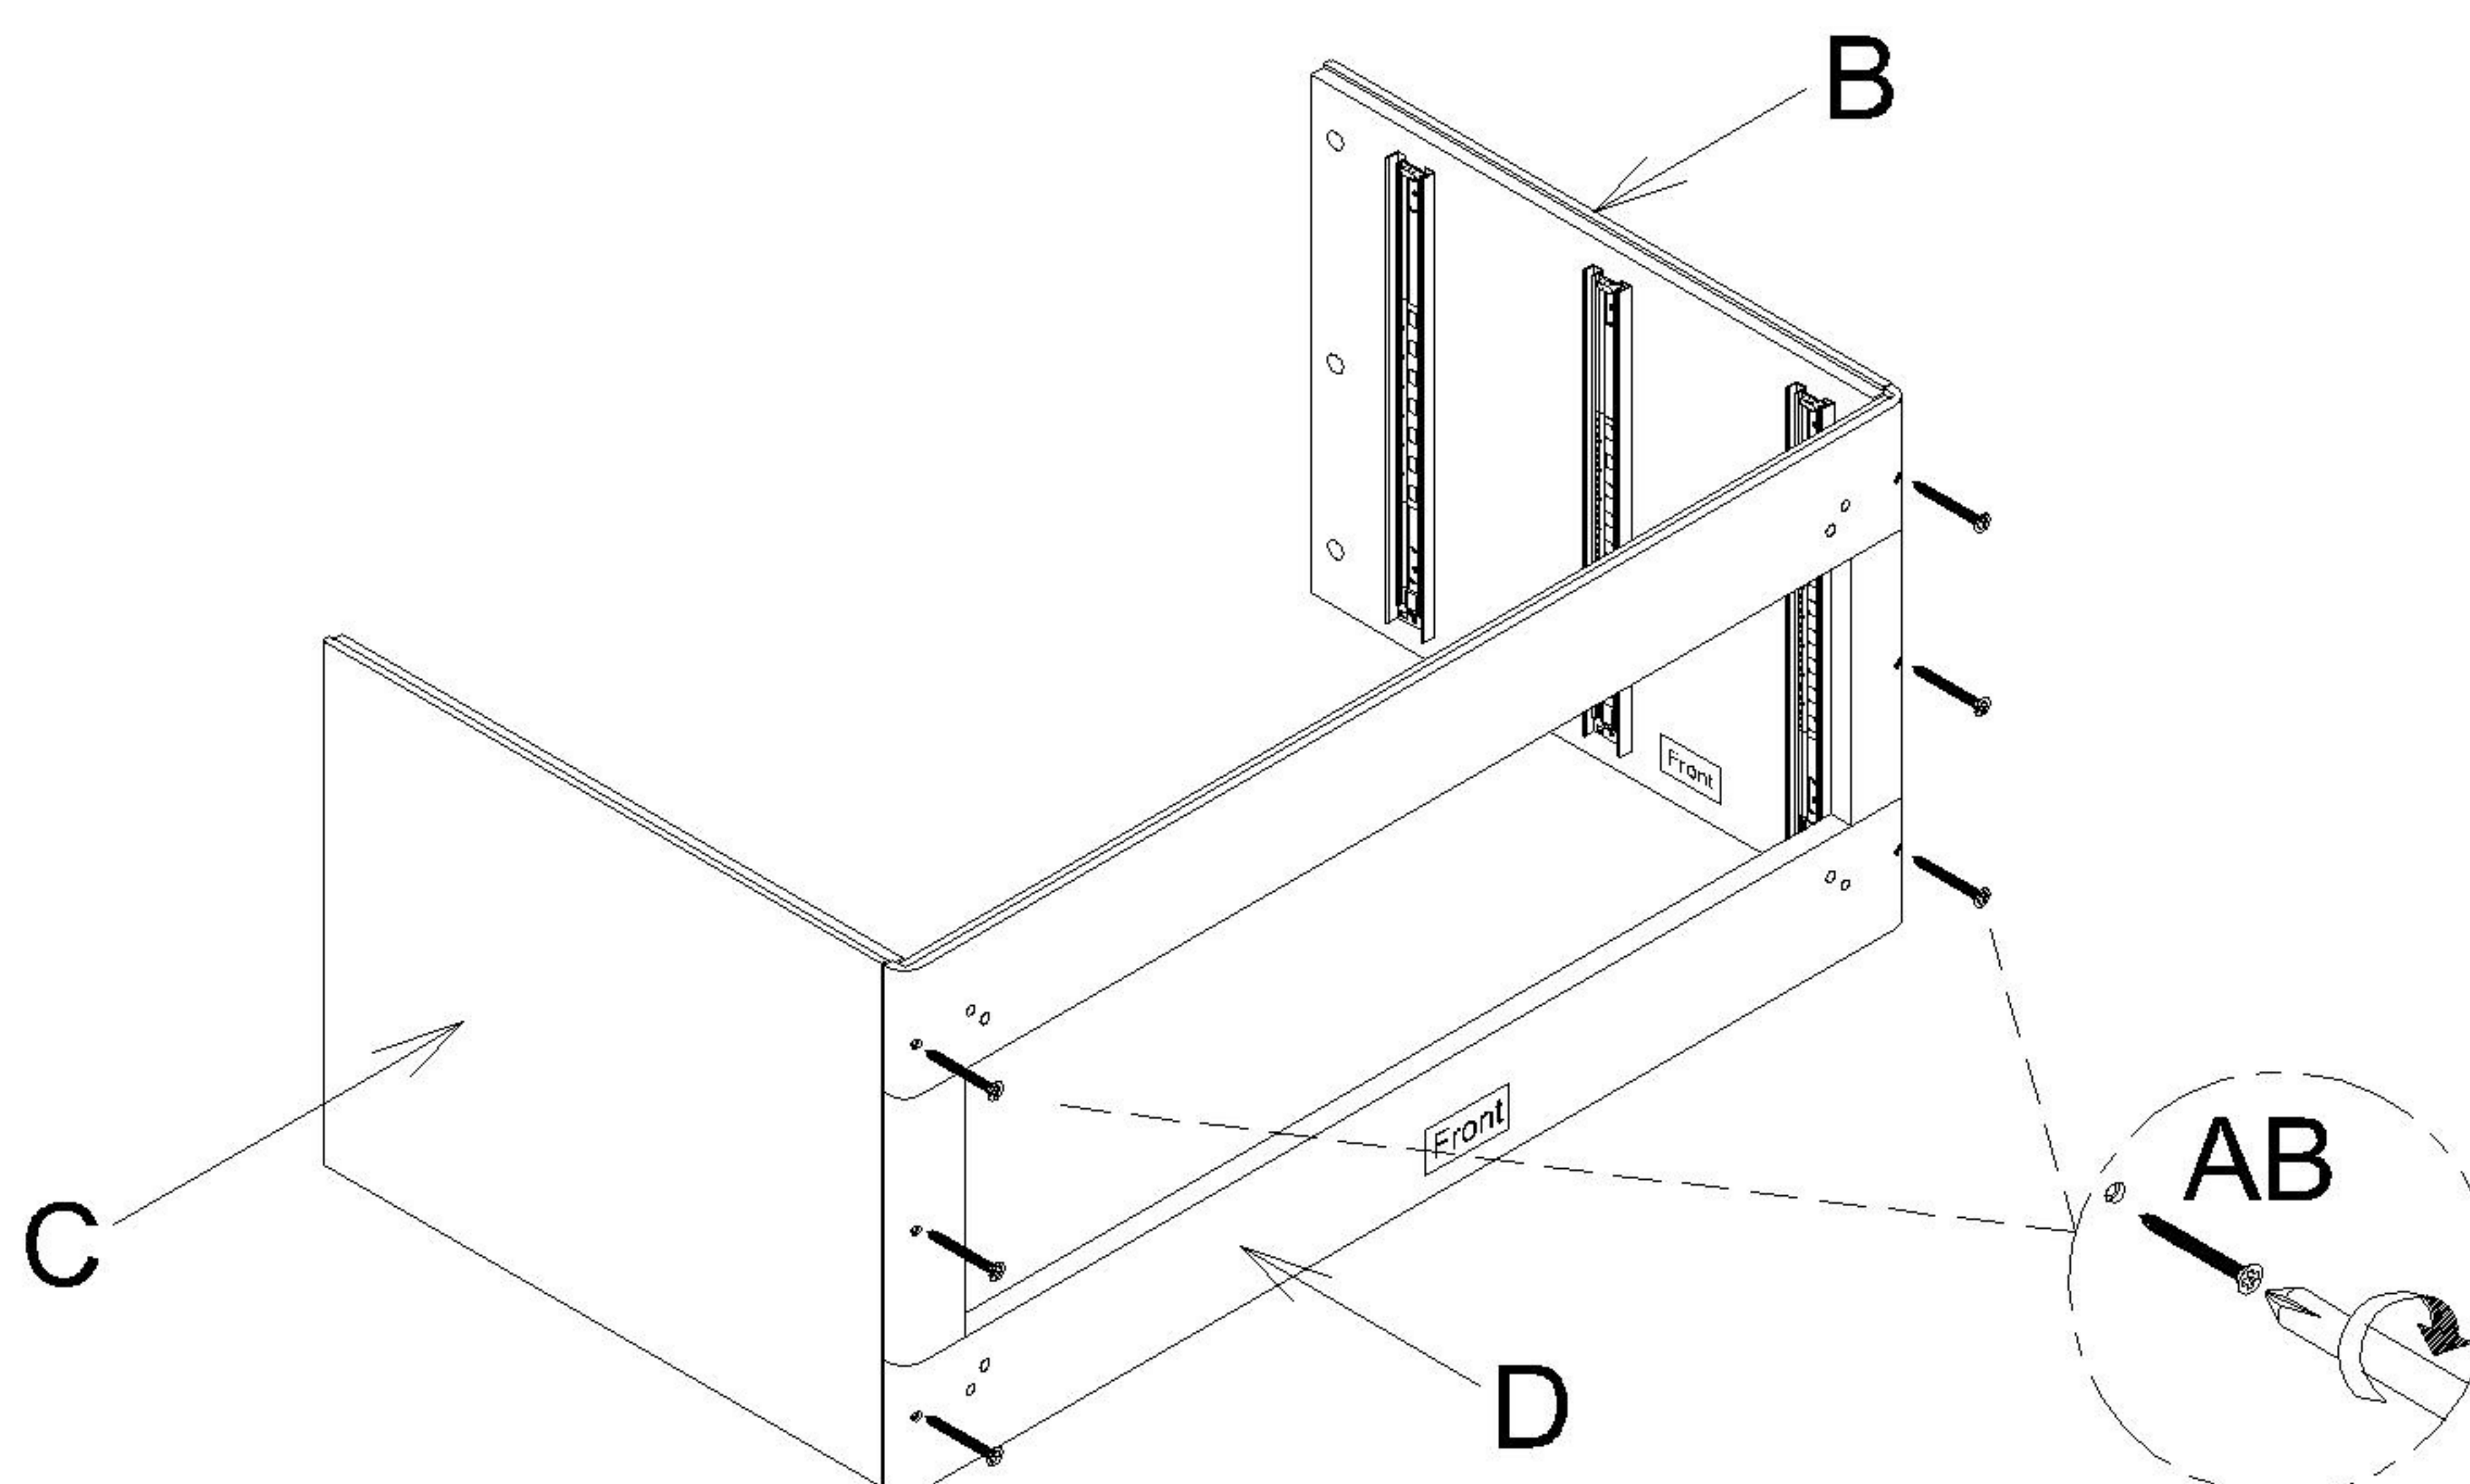**6**


Attach Top Panel (A) to Left & Right Side Panel (B & C) and secure with Cam Lock (S).
Cover Cam Lock (S) with Cam Lock Cover (V).

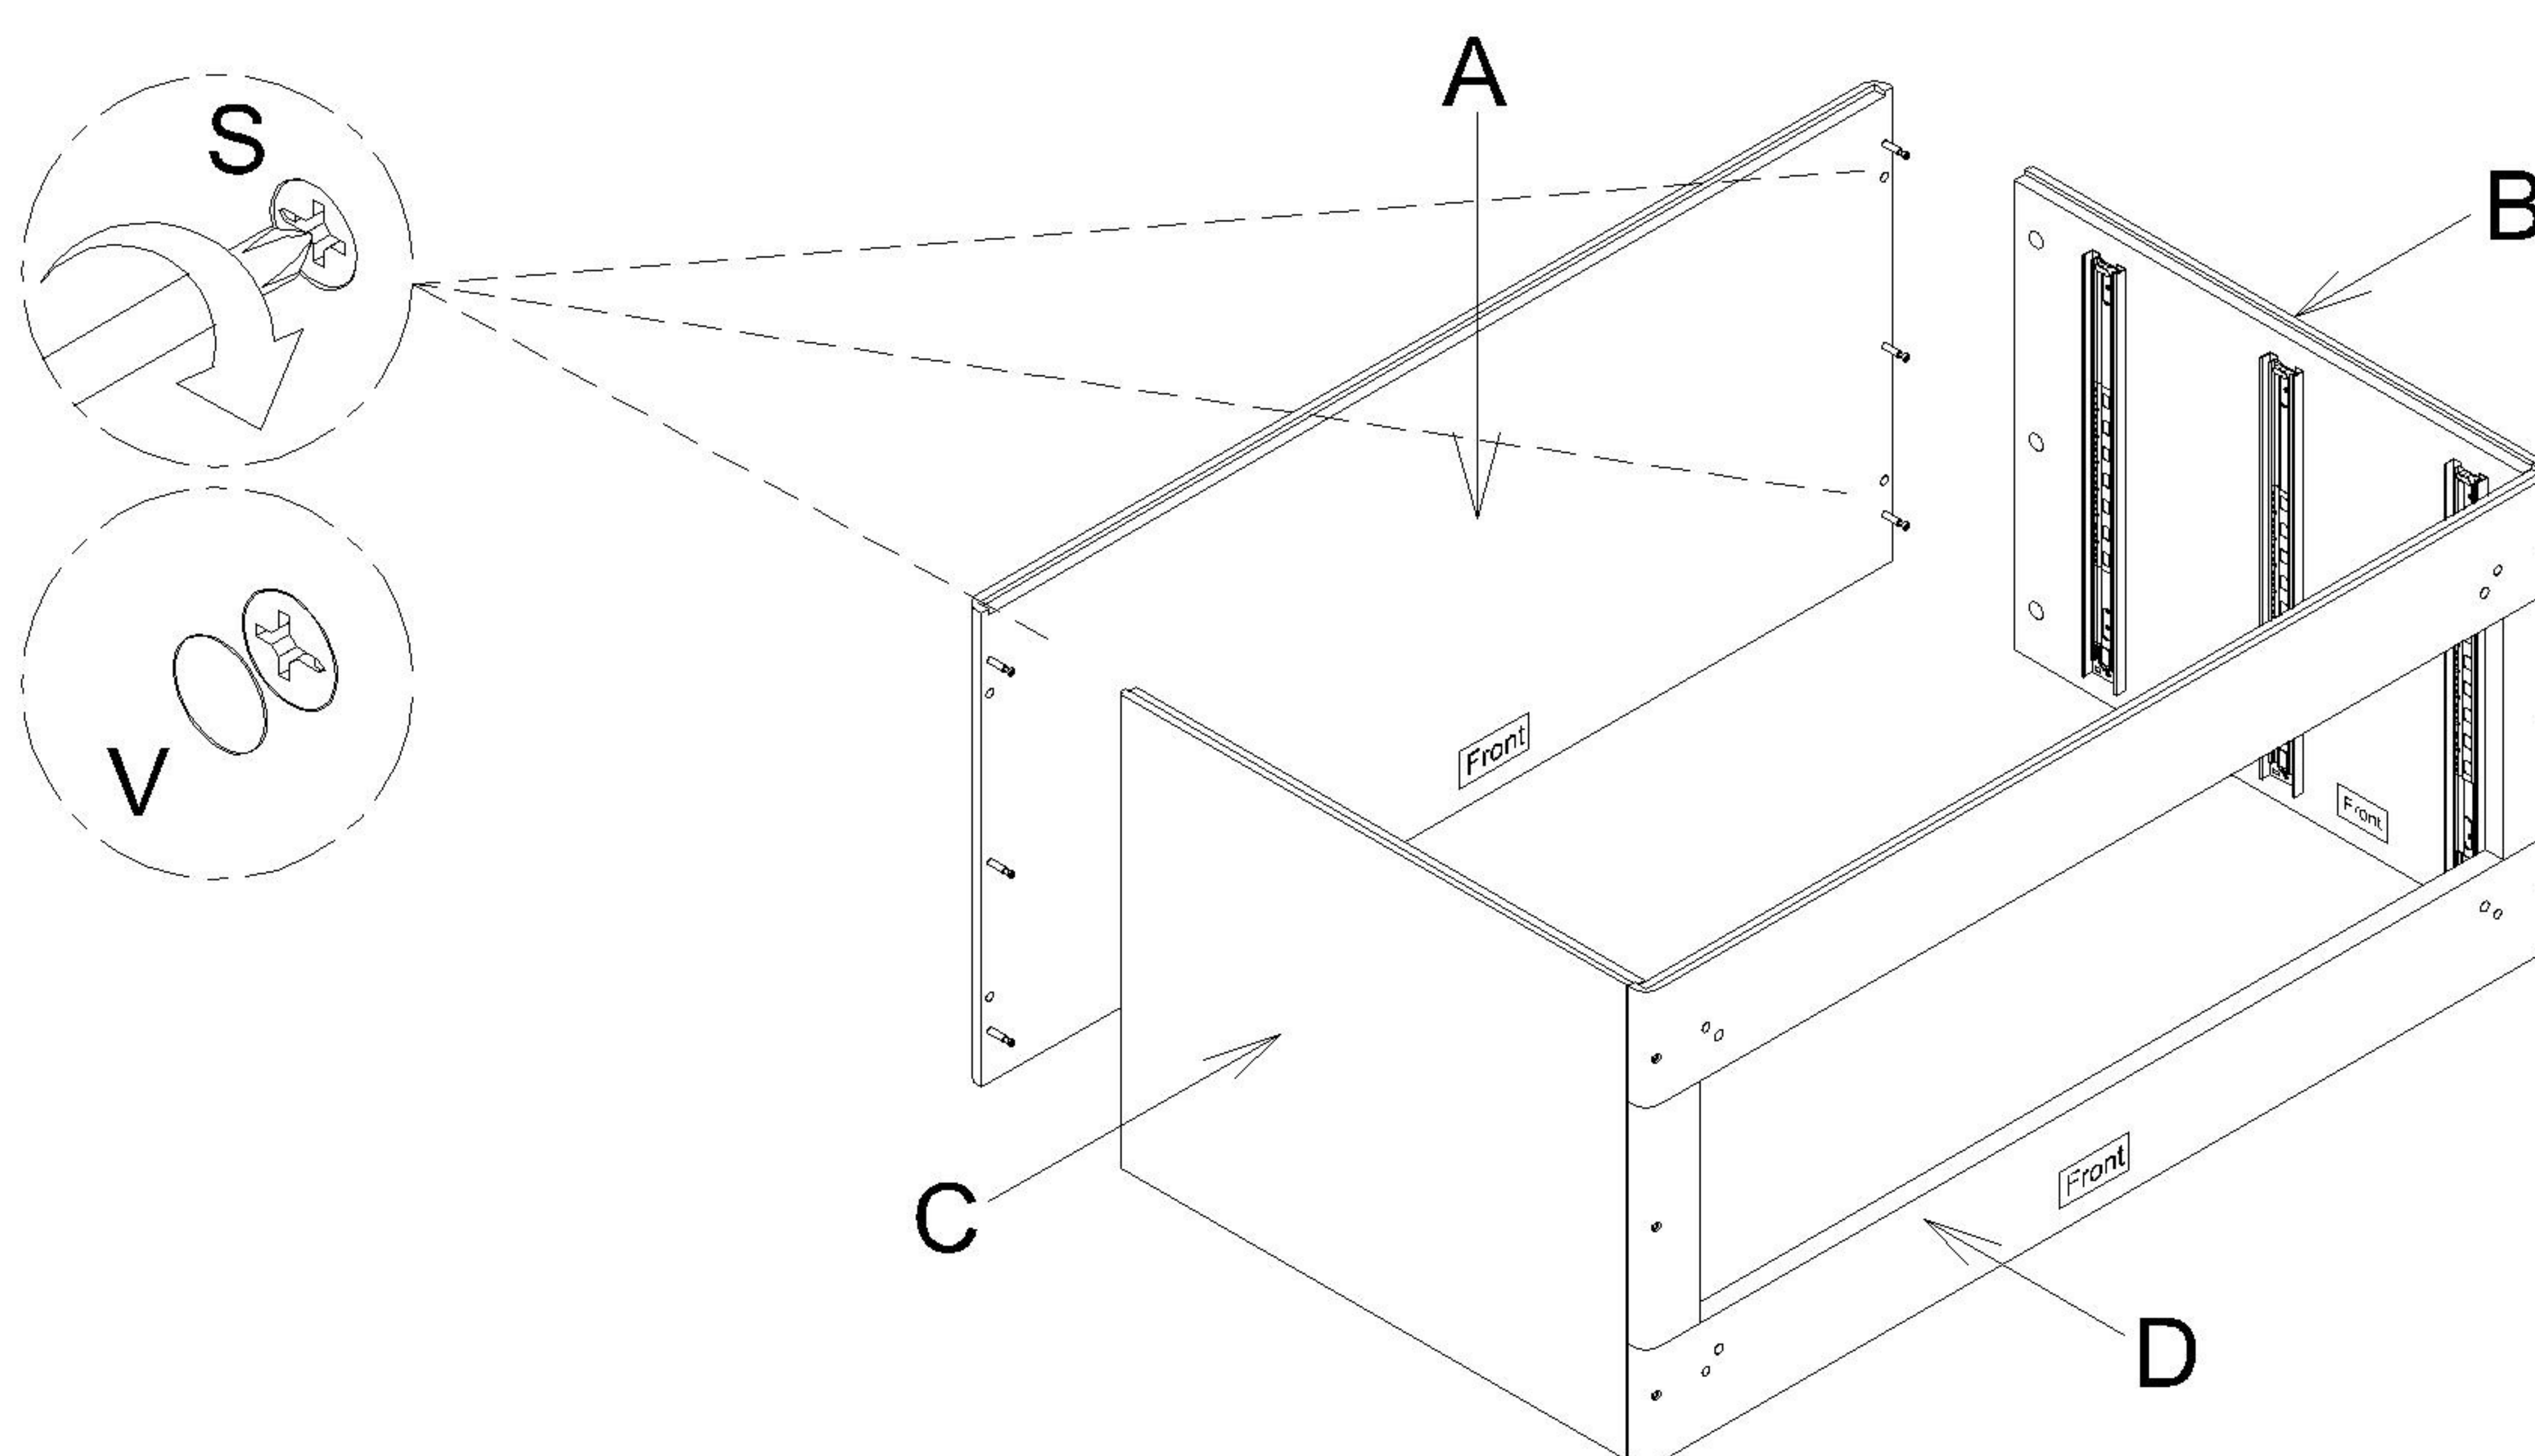

- 7** Attach Post (F) to Bottom Frame (D) and secure with Flat Washer (X), Spring Washer (Y) & Hex Nut (Z) and tighten with Spanner(AA) clockwise.

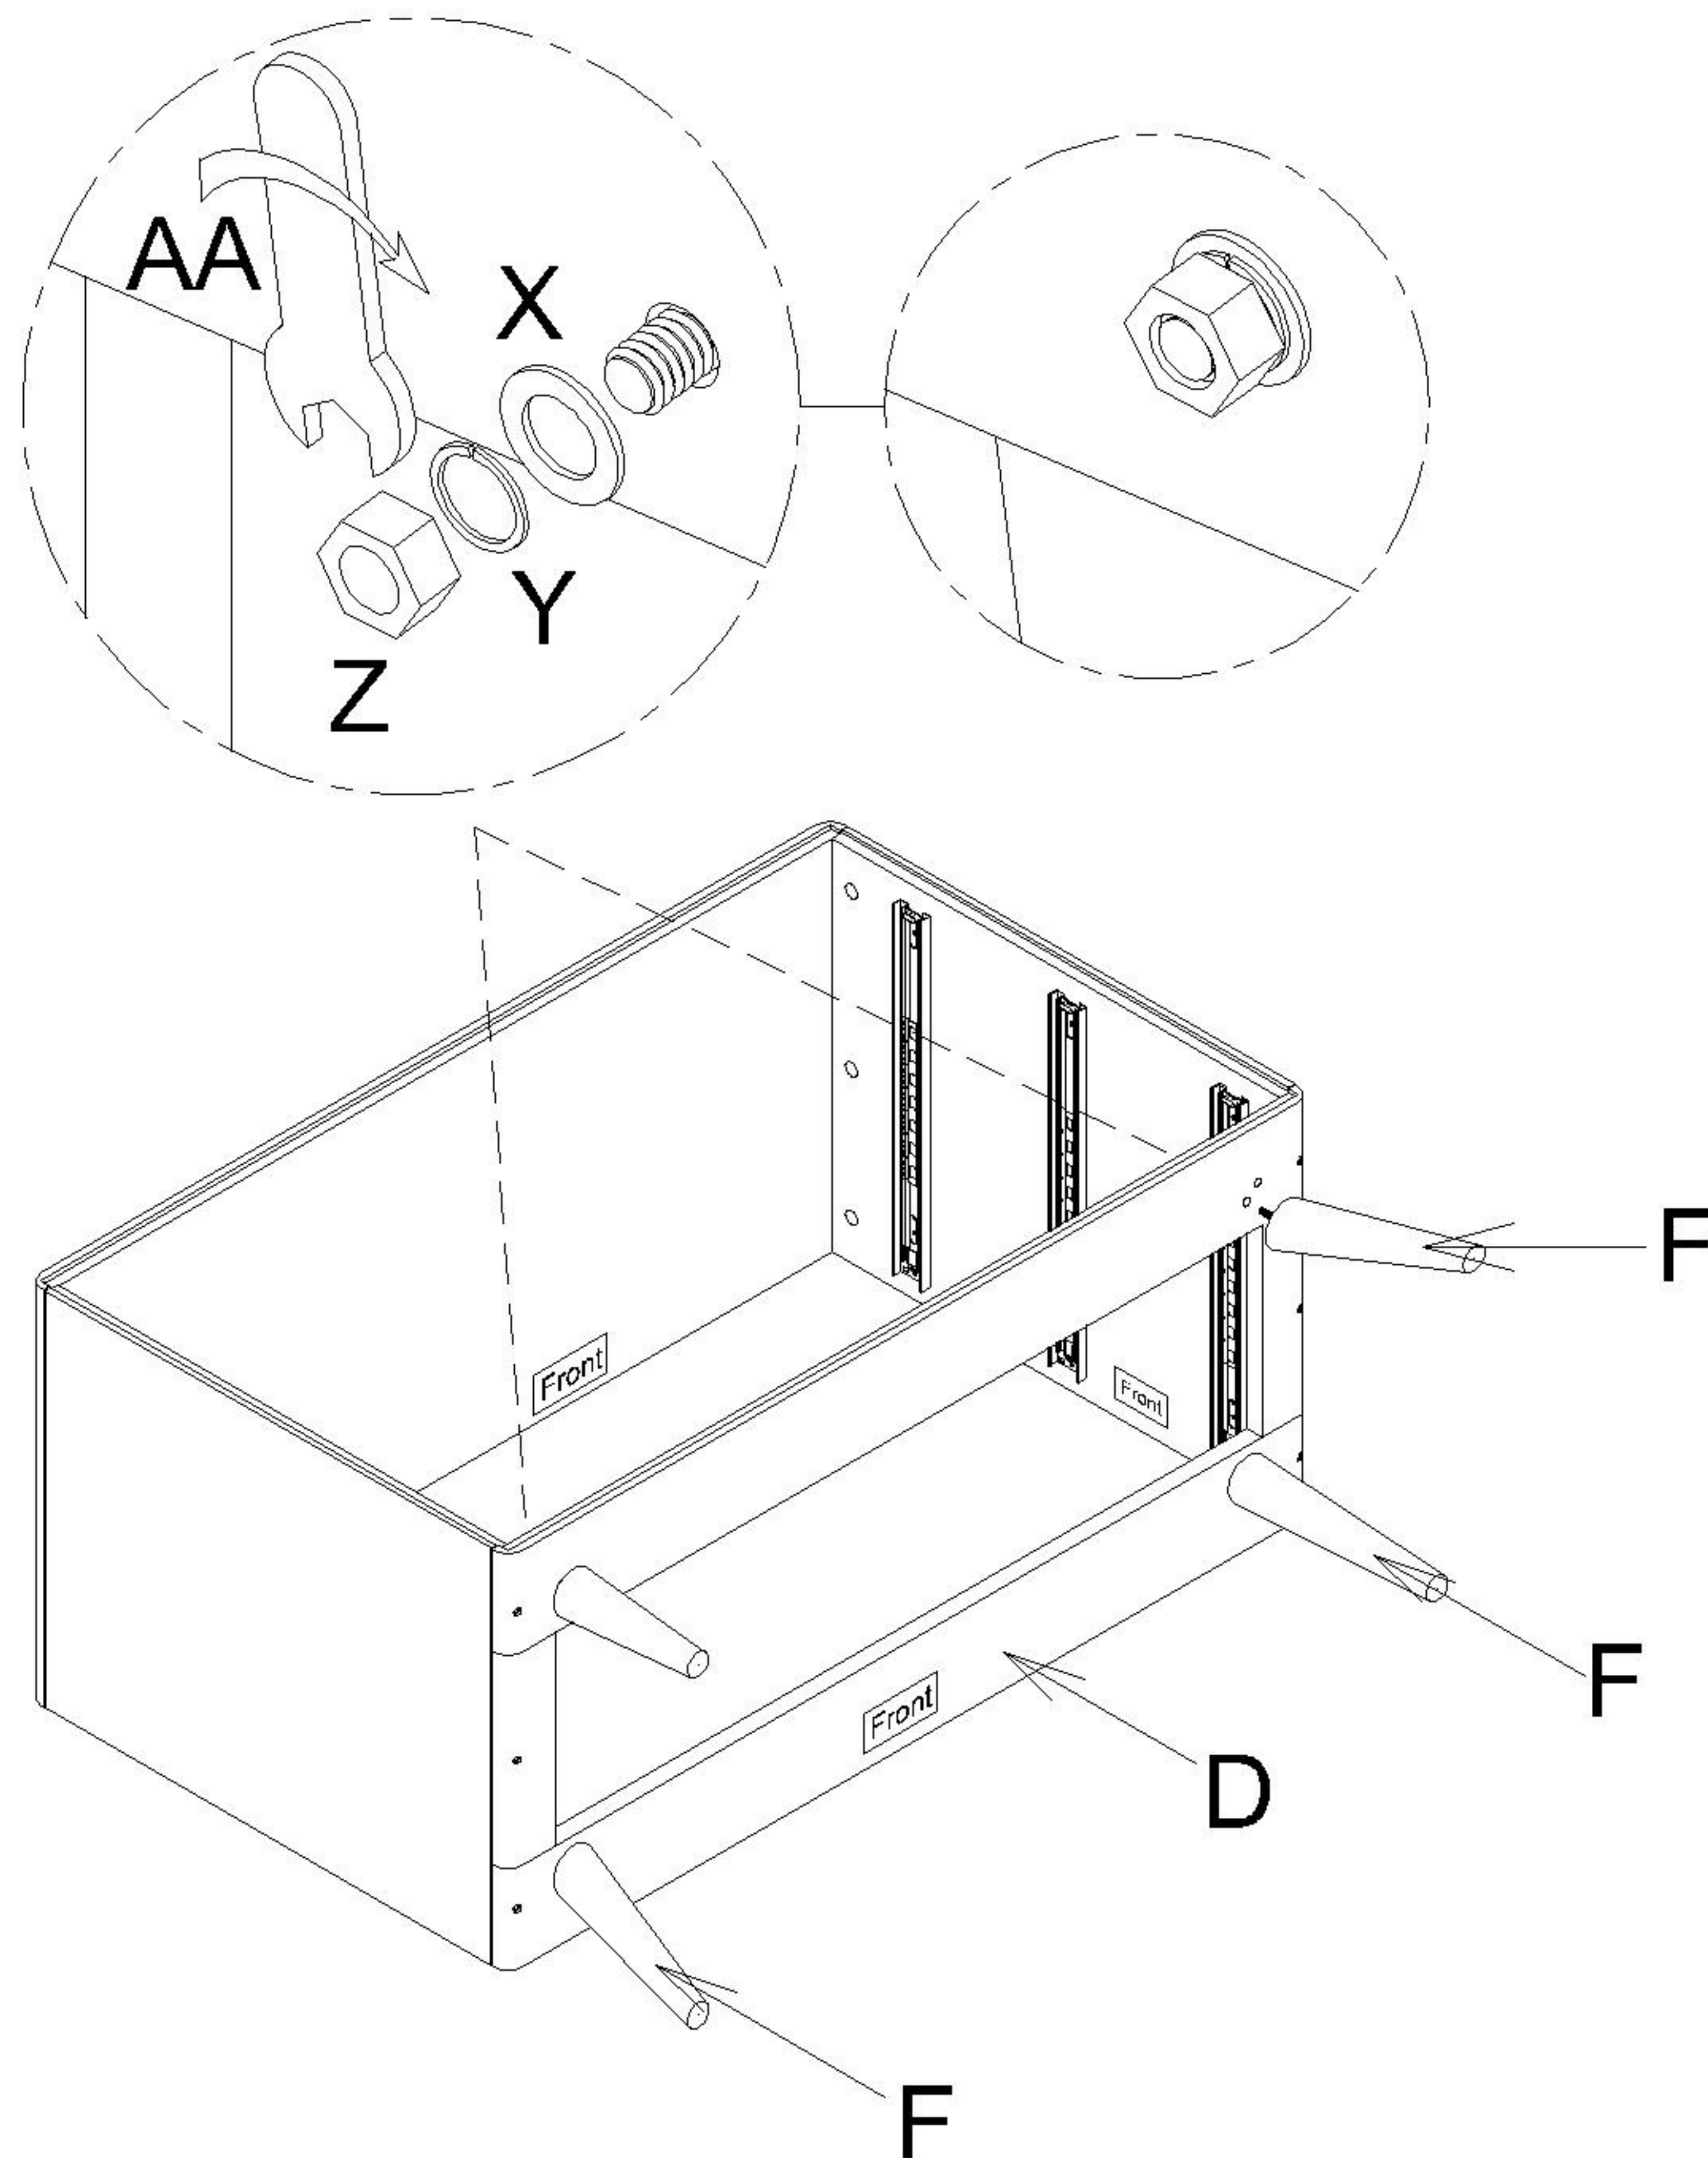


- 8** Attach Back Plywood (E) to assembled unit using Panhead Screw (W) to secure.

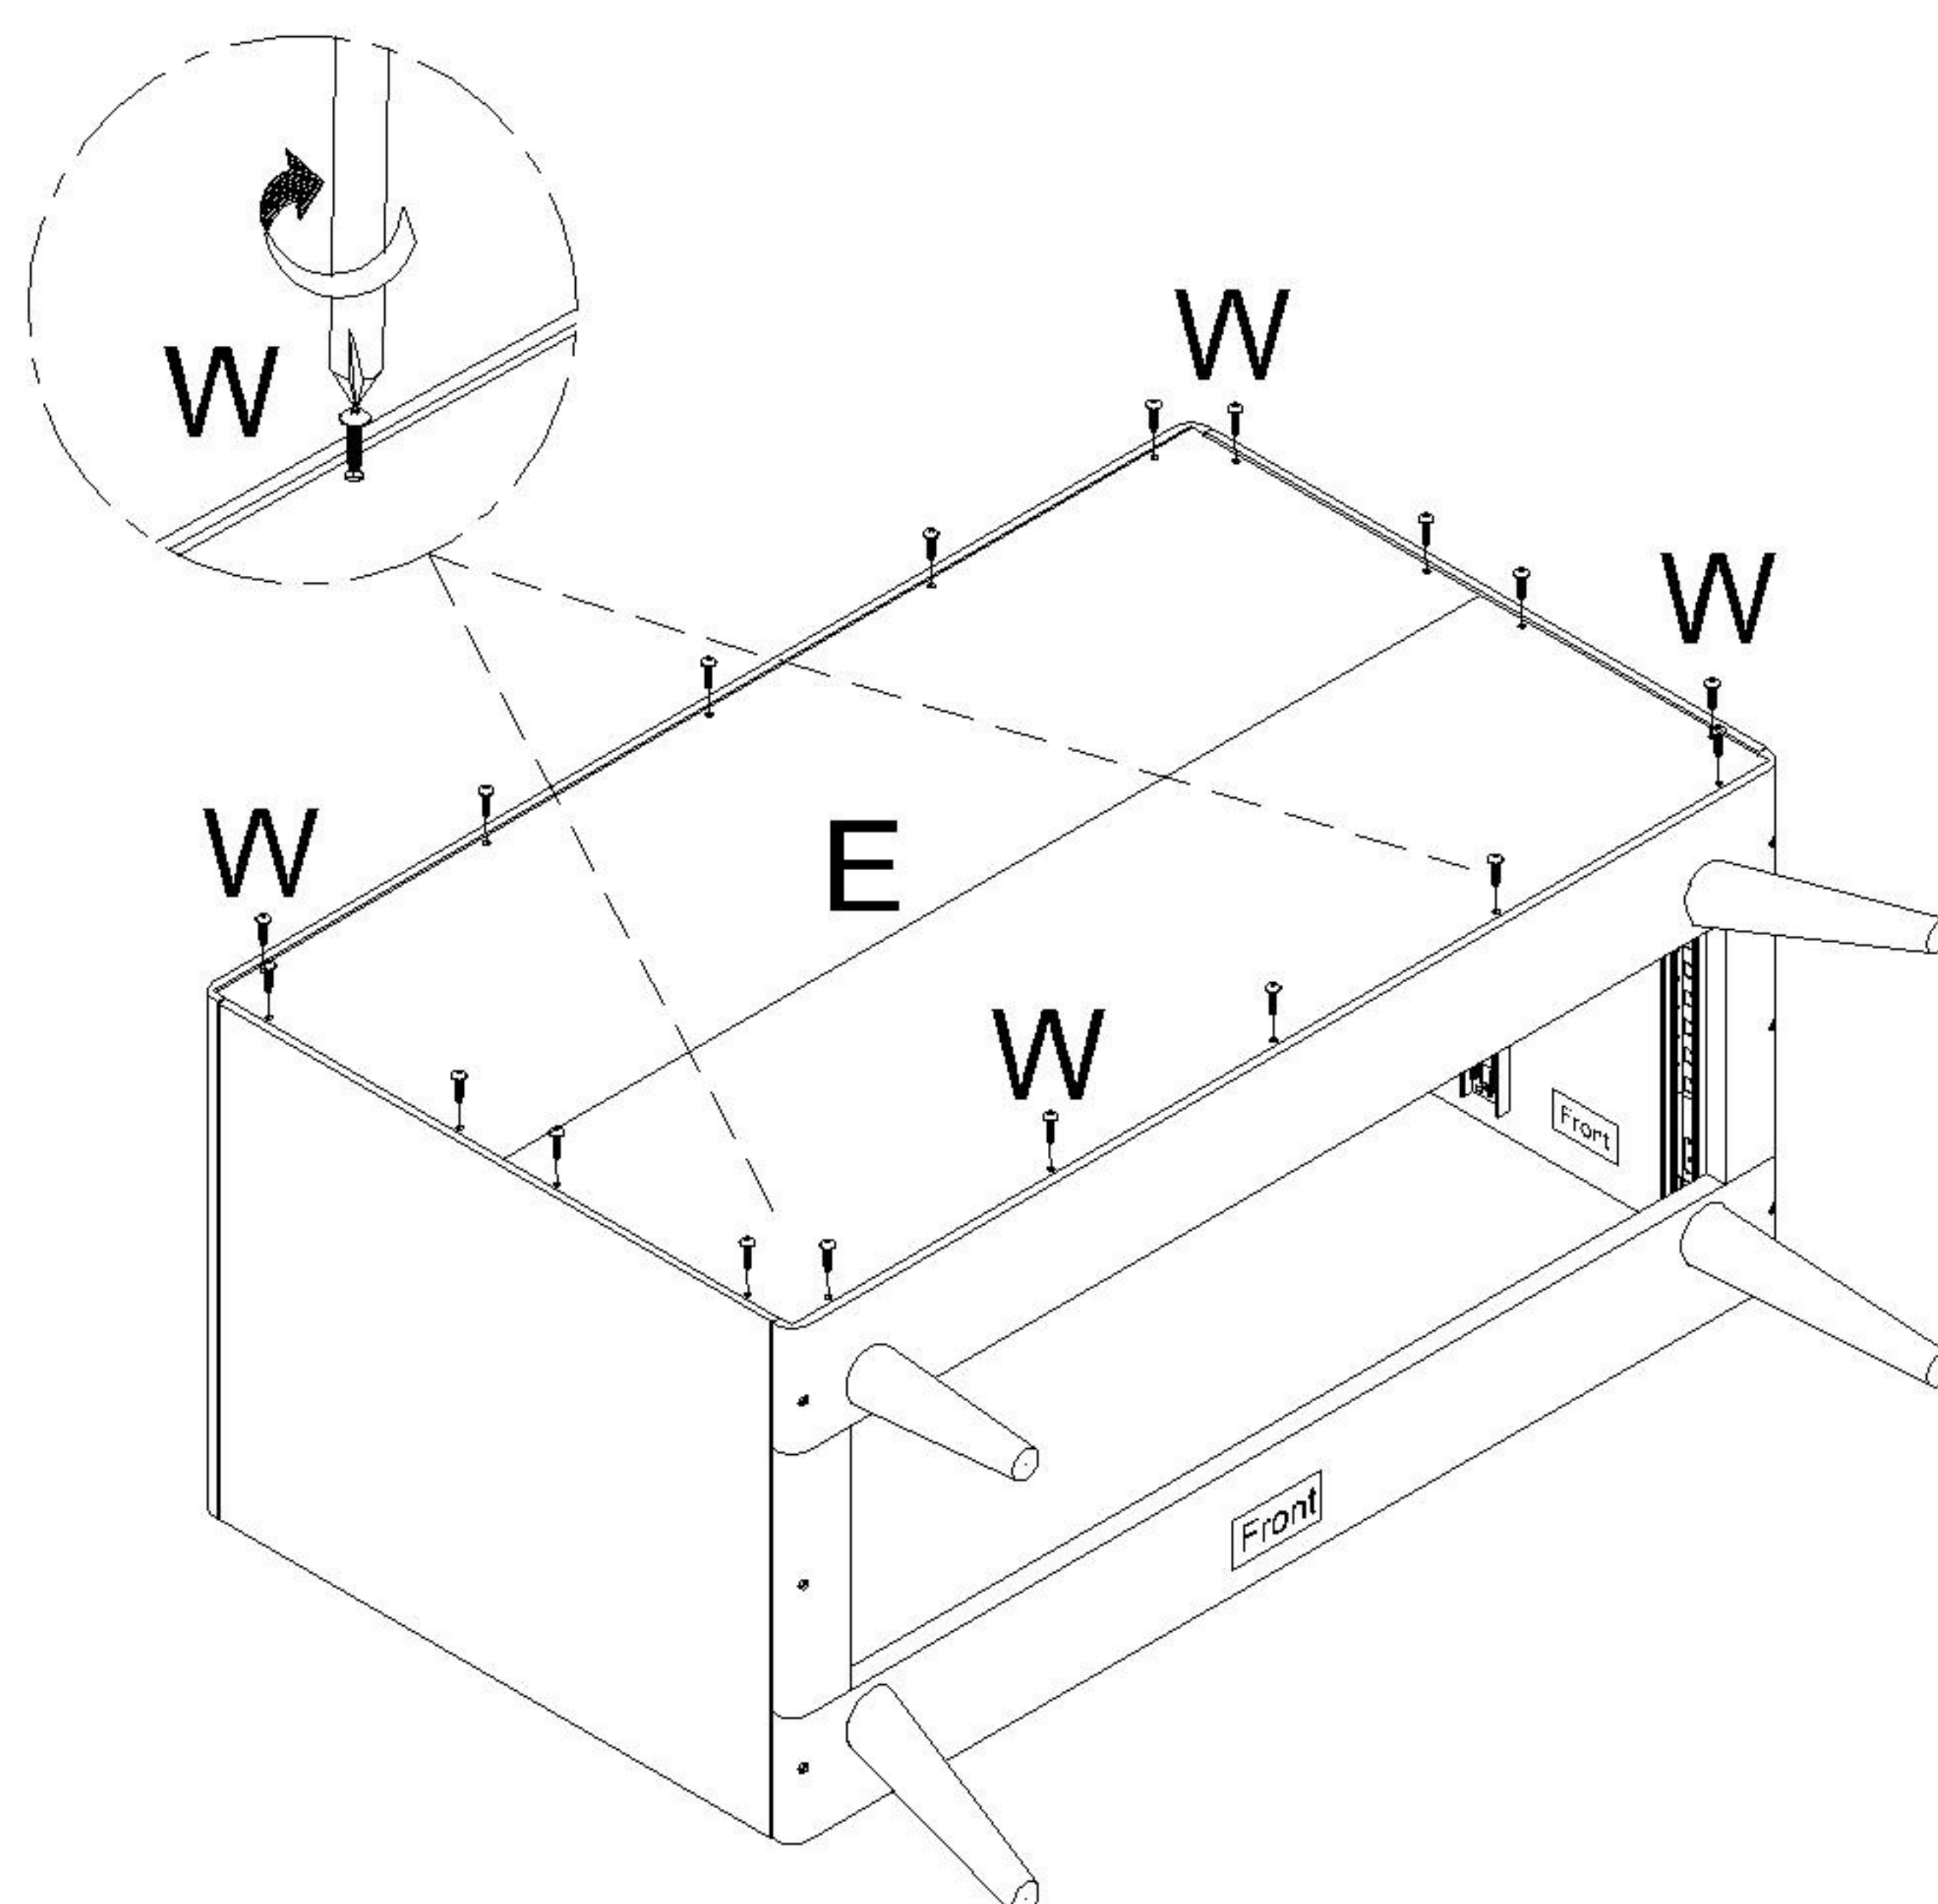


9

Attach Extension Runner (Q) to Left & Right Small Drawer Side (H & K) using Screw (P) to secure.

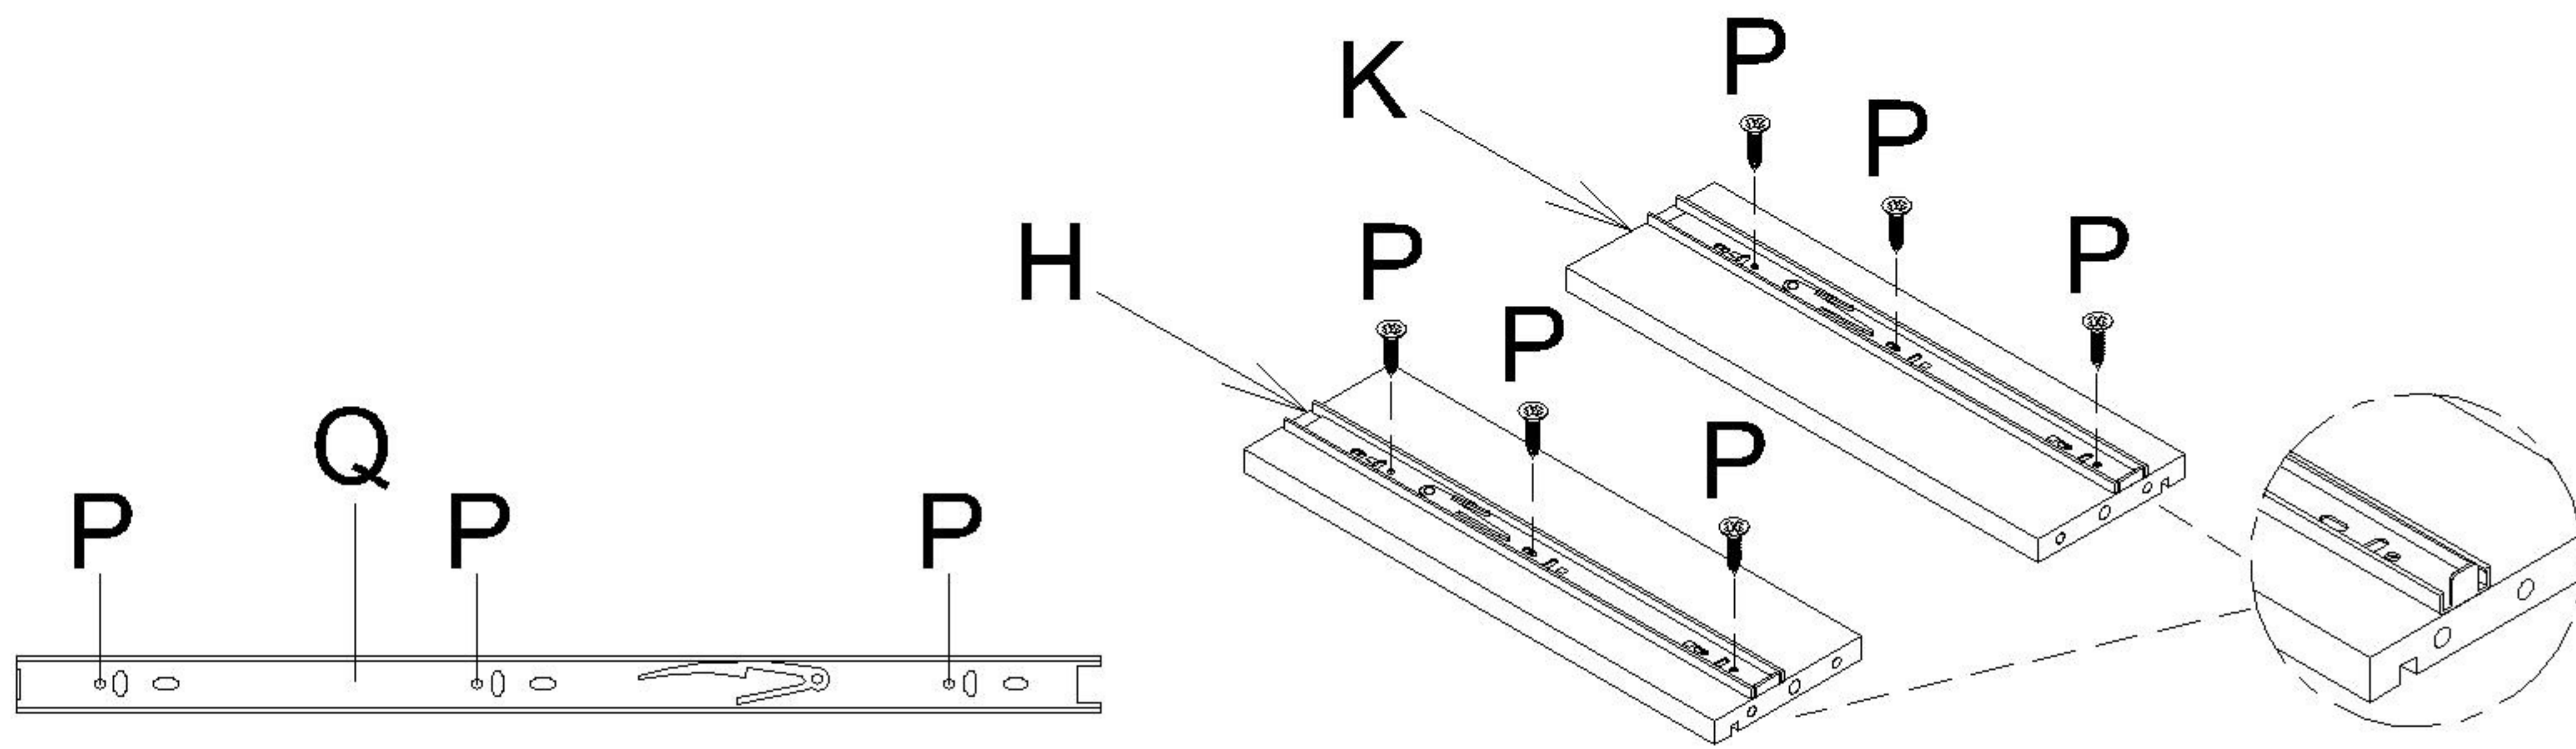


10

Insert Dowel (U) to Left & Right Small Drawer Side (H & K) & Small Drawer Back (I). Attach Cam Lock (S) to Left & Right Small Drawer Side (H & K) & Small Drawer Back (I). Attach Cam Bolt (T) to Small Drawer Front (G) and Left & Right Small Drawer Side (H & K).

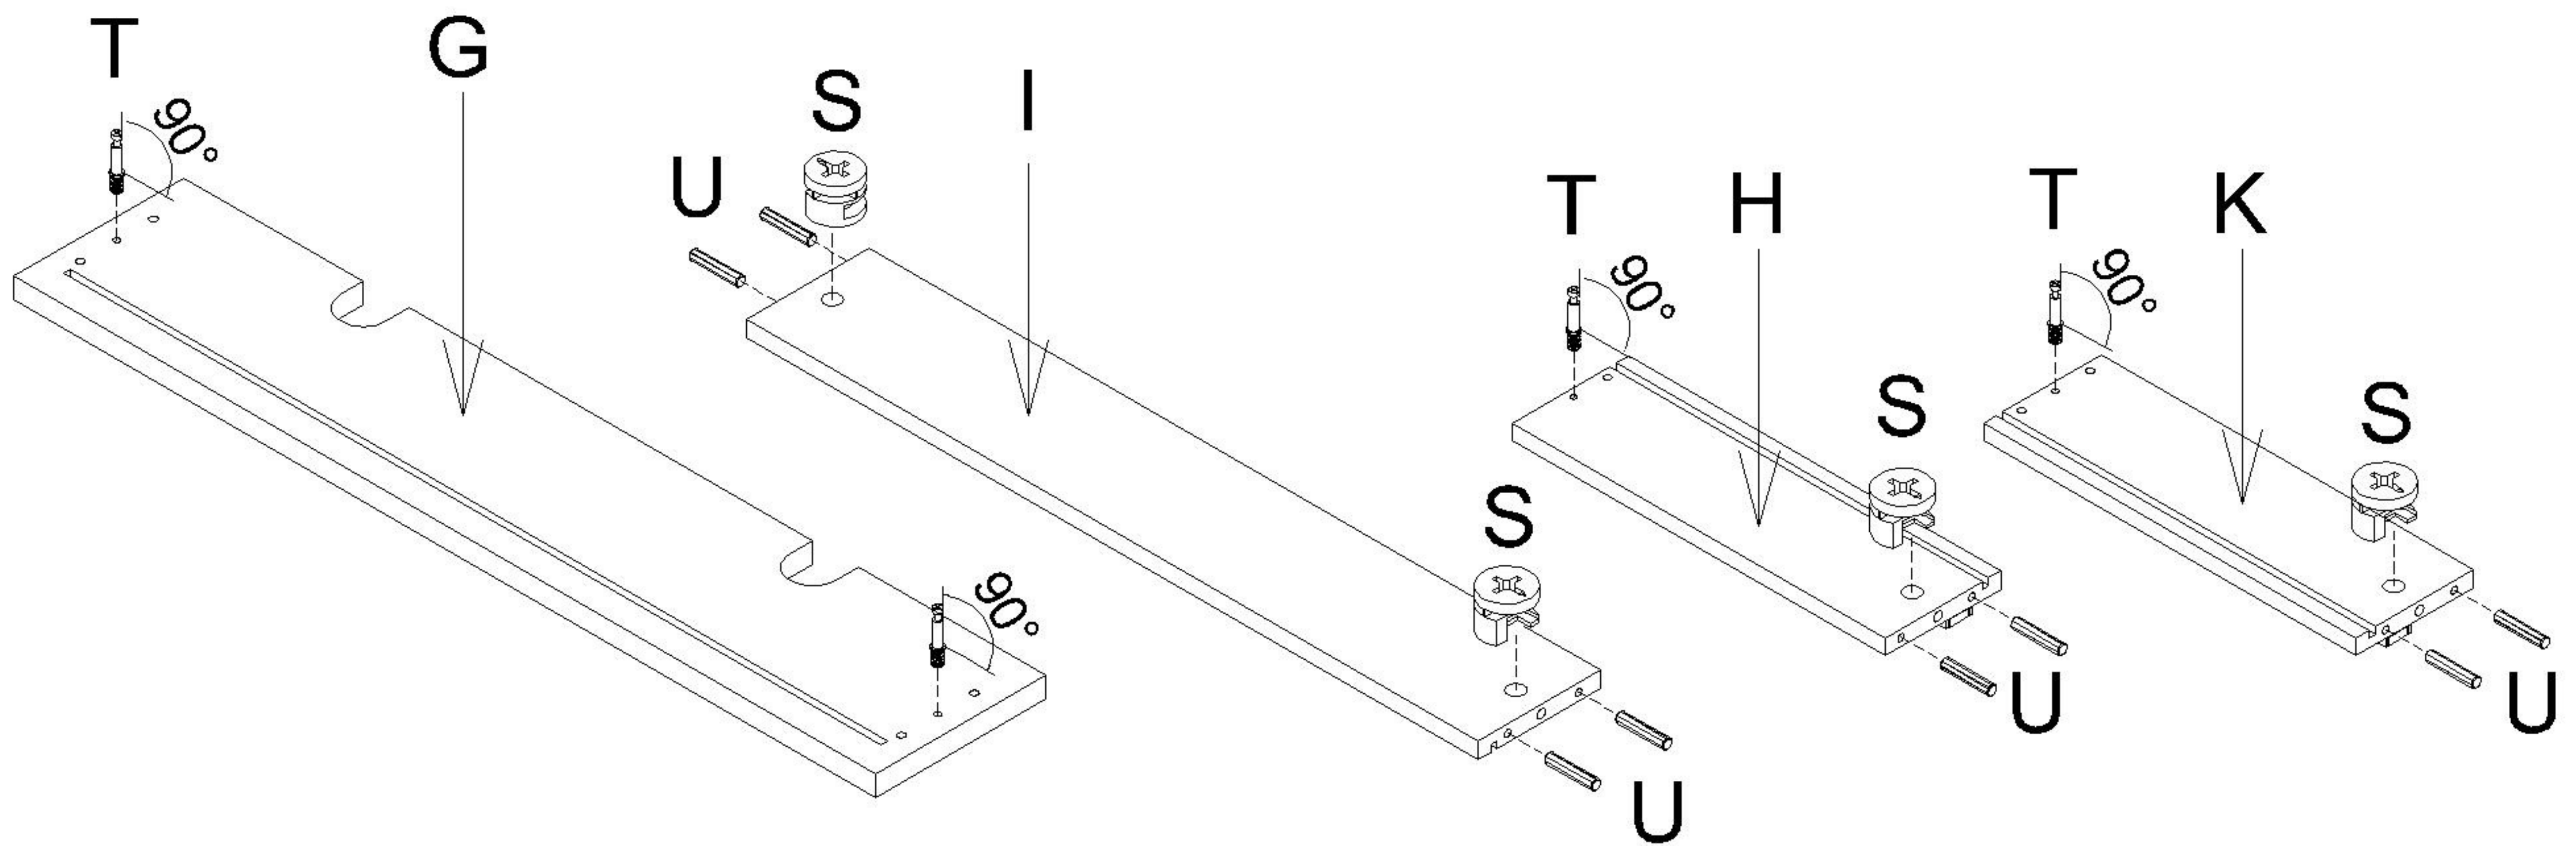


11


Attach Left & Right Small Drawer Side (H & K) to Small Drawer Back (I) and secure with Cam Lock (S). Use Cam Lock Cover (V) to cover Cam Lock (S).

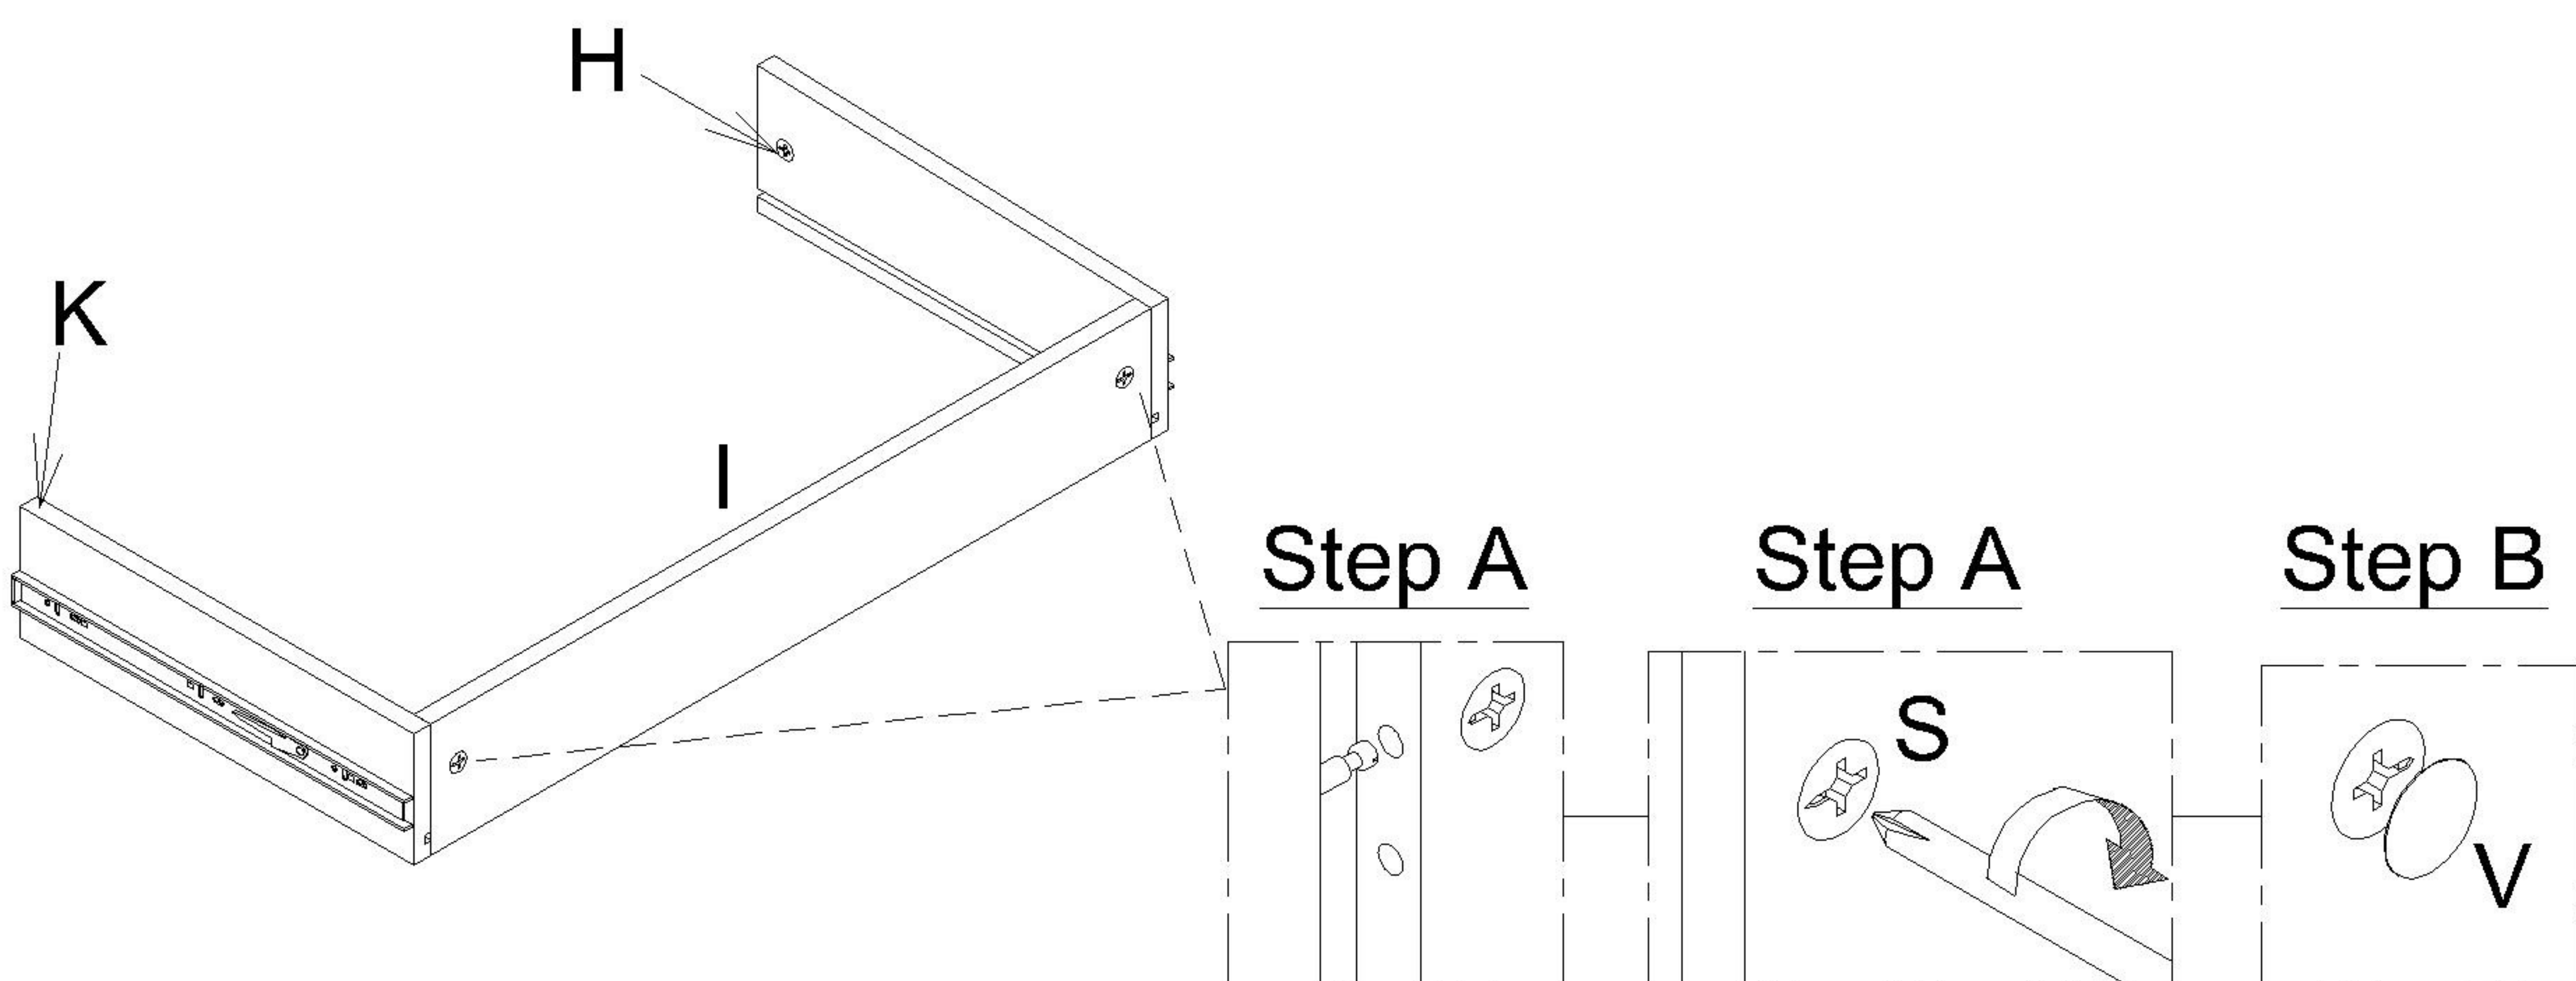


- 12** Slot Drawer Base (J) in corresponding grooves. Attach Small Drawer Front (G) to Drawer Box and secure with Cam Lock (S). Use Cam Lock Cover (V) to cover Cam Lock (S).

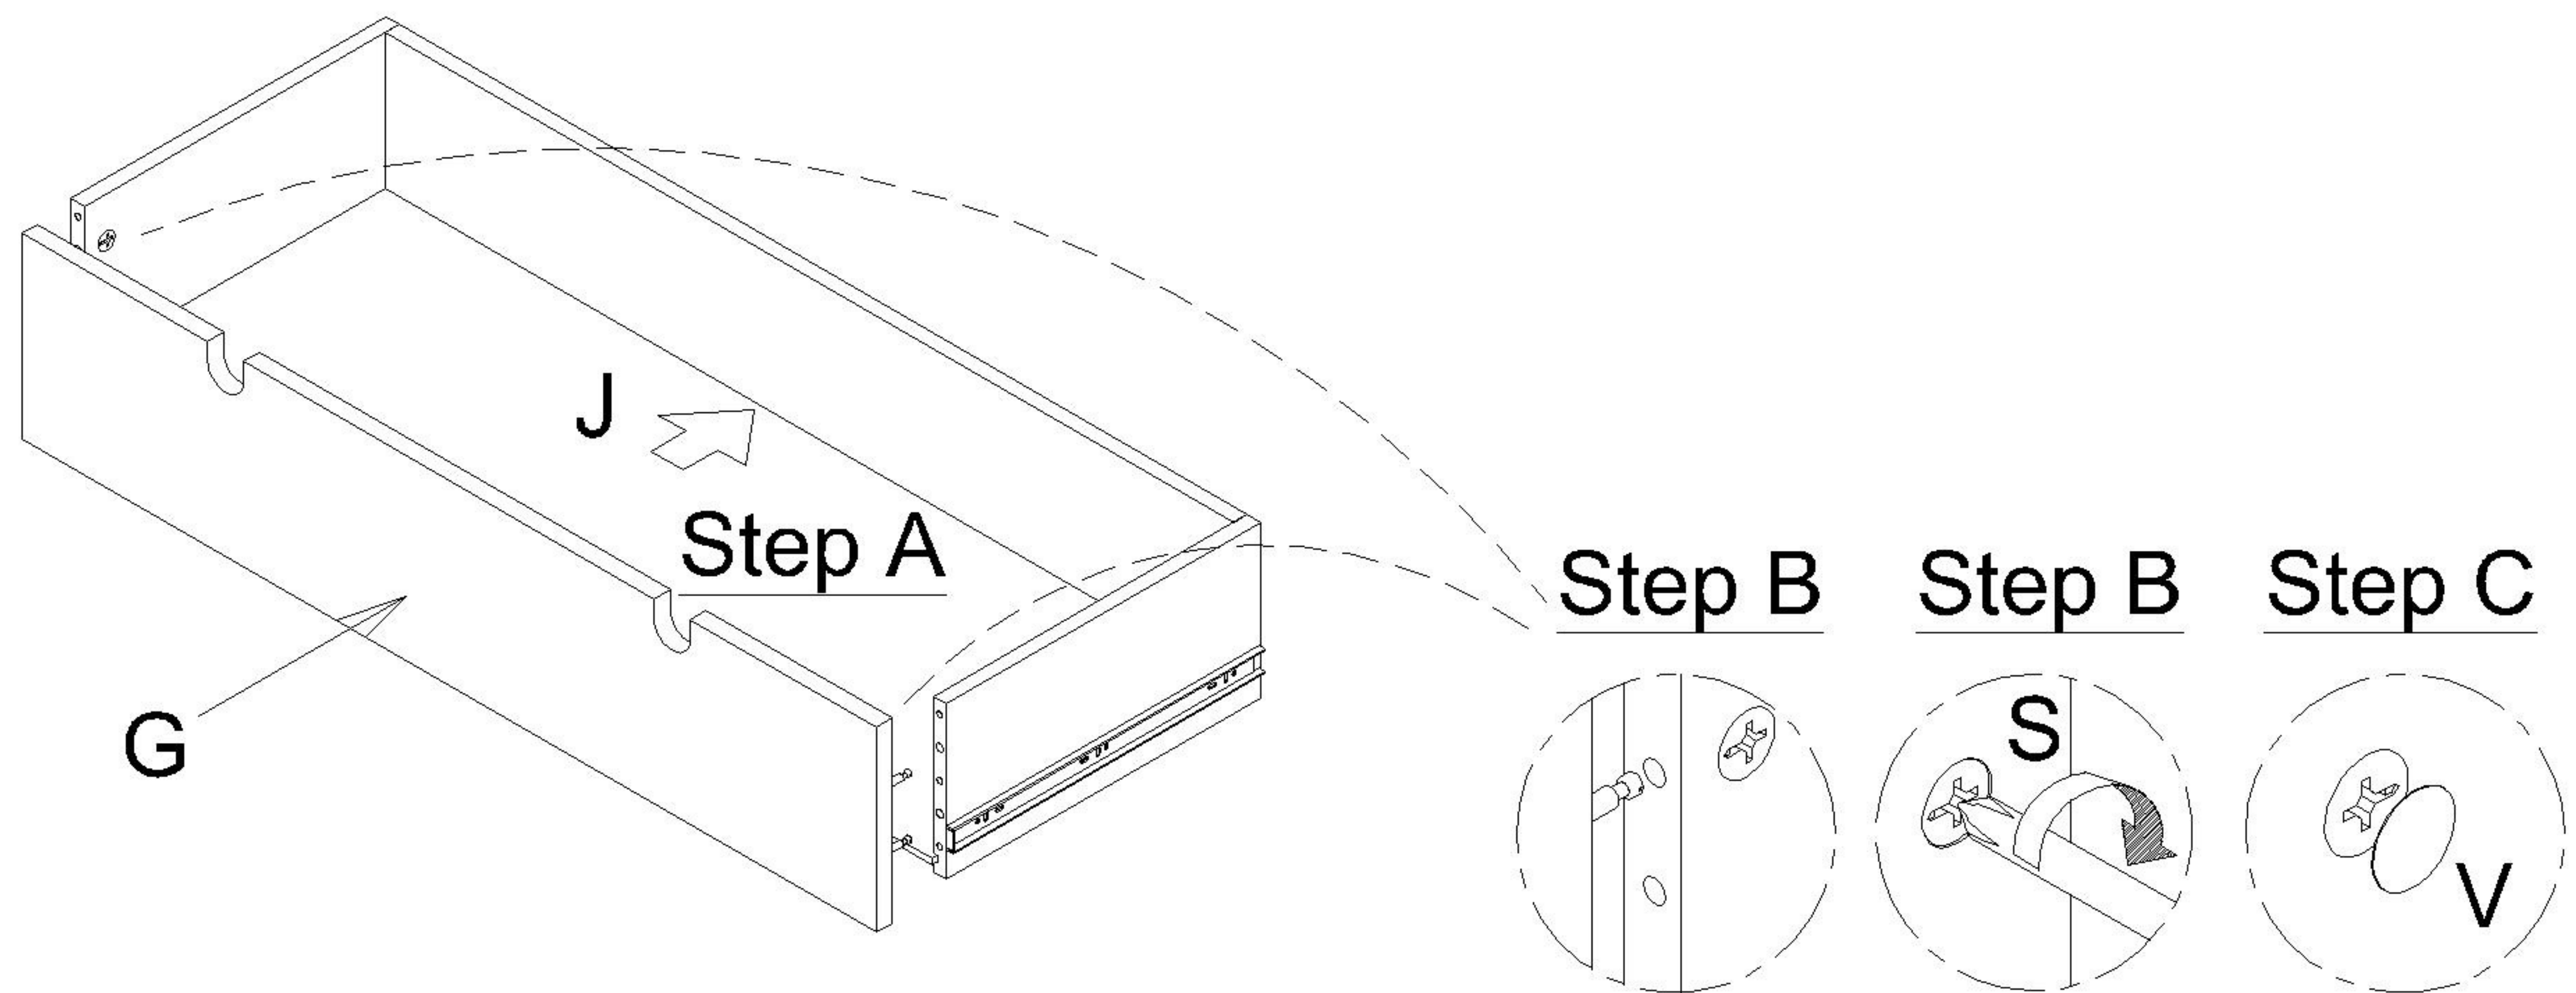


- 13** Attach Extension Runner (Q) to Left & Right Big Drawer Side (M & O) using Screw (P) to secure.

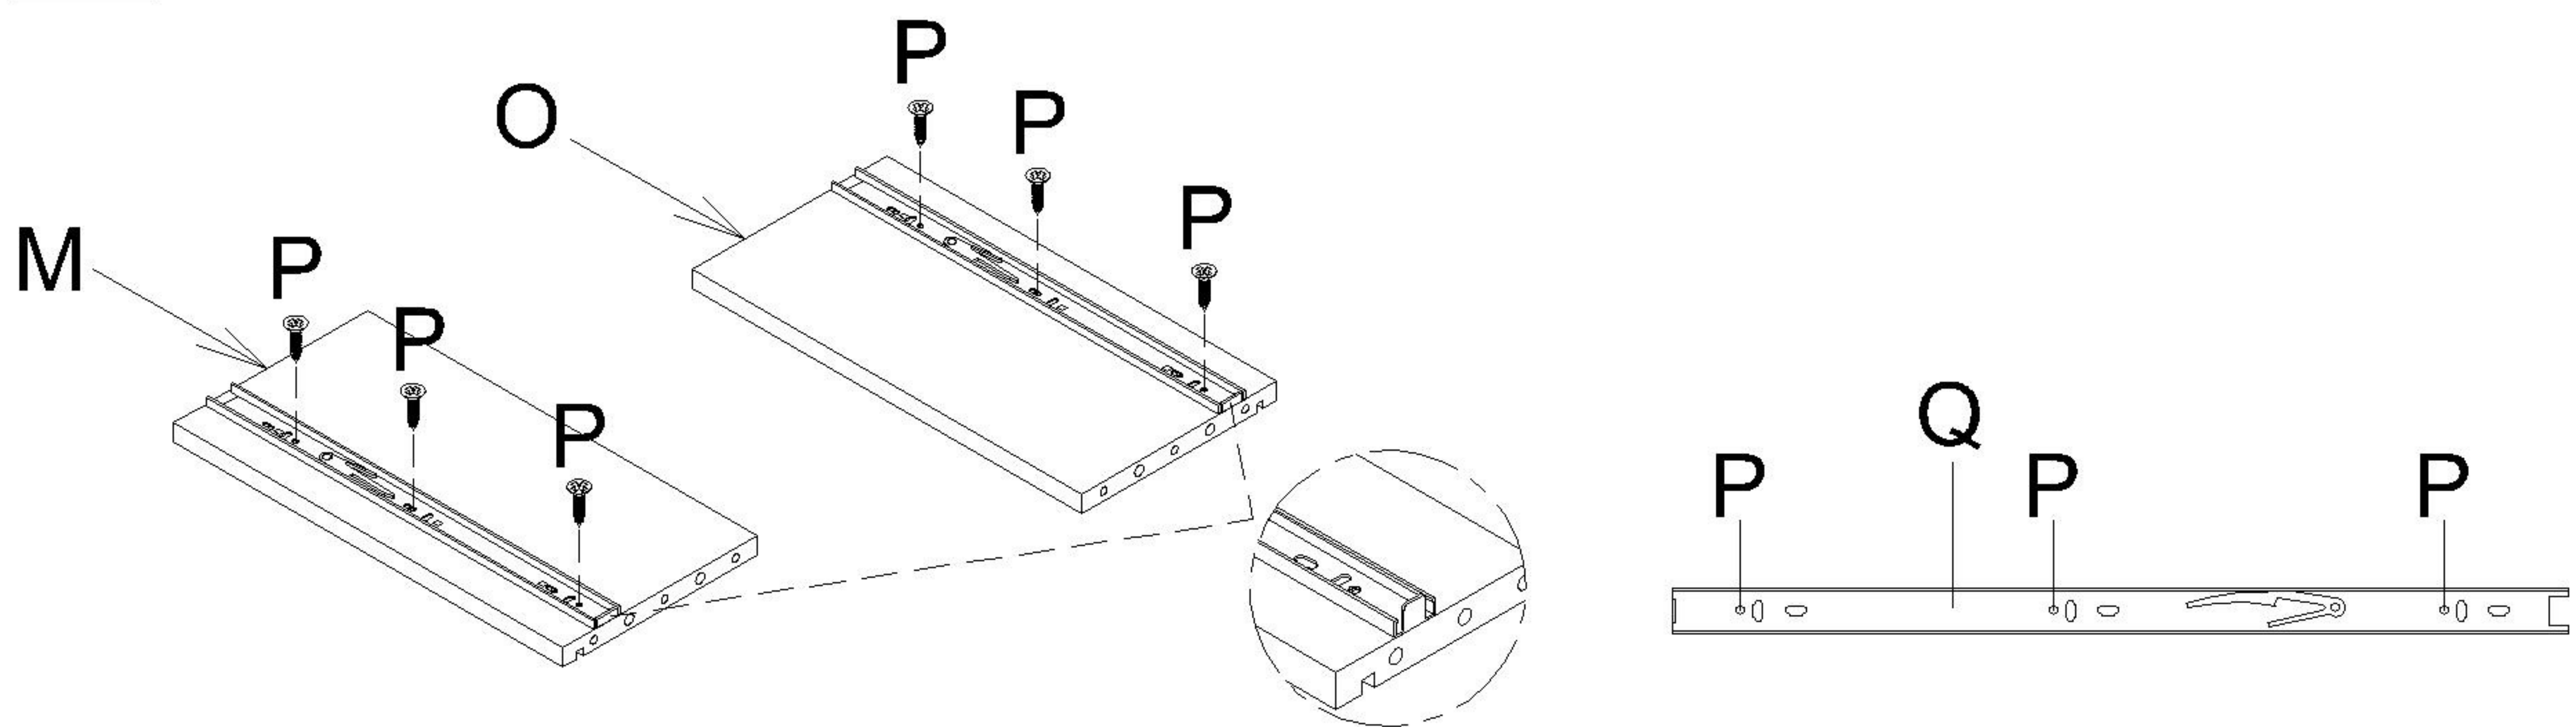


- 14** Insert Dowel (U) to Left & Right Big Drawer Side (M & O) & Big Drawer Back (N). Attach Cam Lock (S) to Left & Right Big Drawer Side (M & O) & Big Drawer Back (N). Attach Cam Bolt (T) to Big Drawer Front (L) and Left & Right Big Drawer Side (M & O).

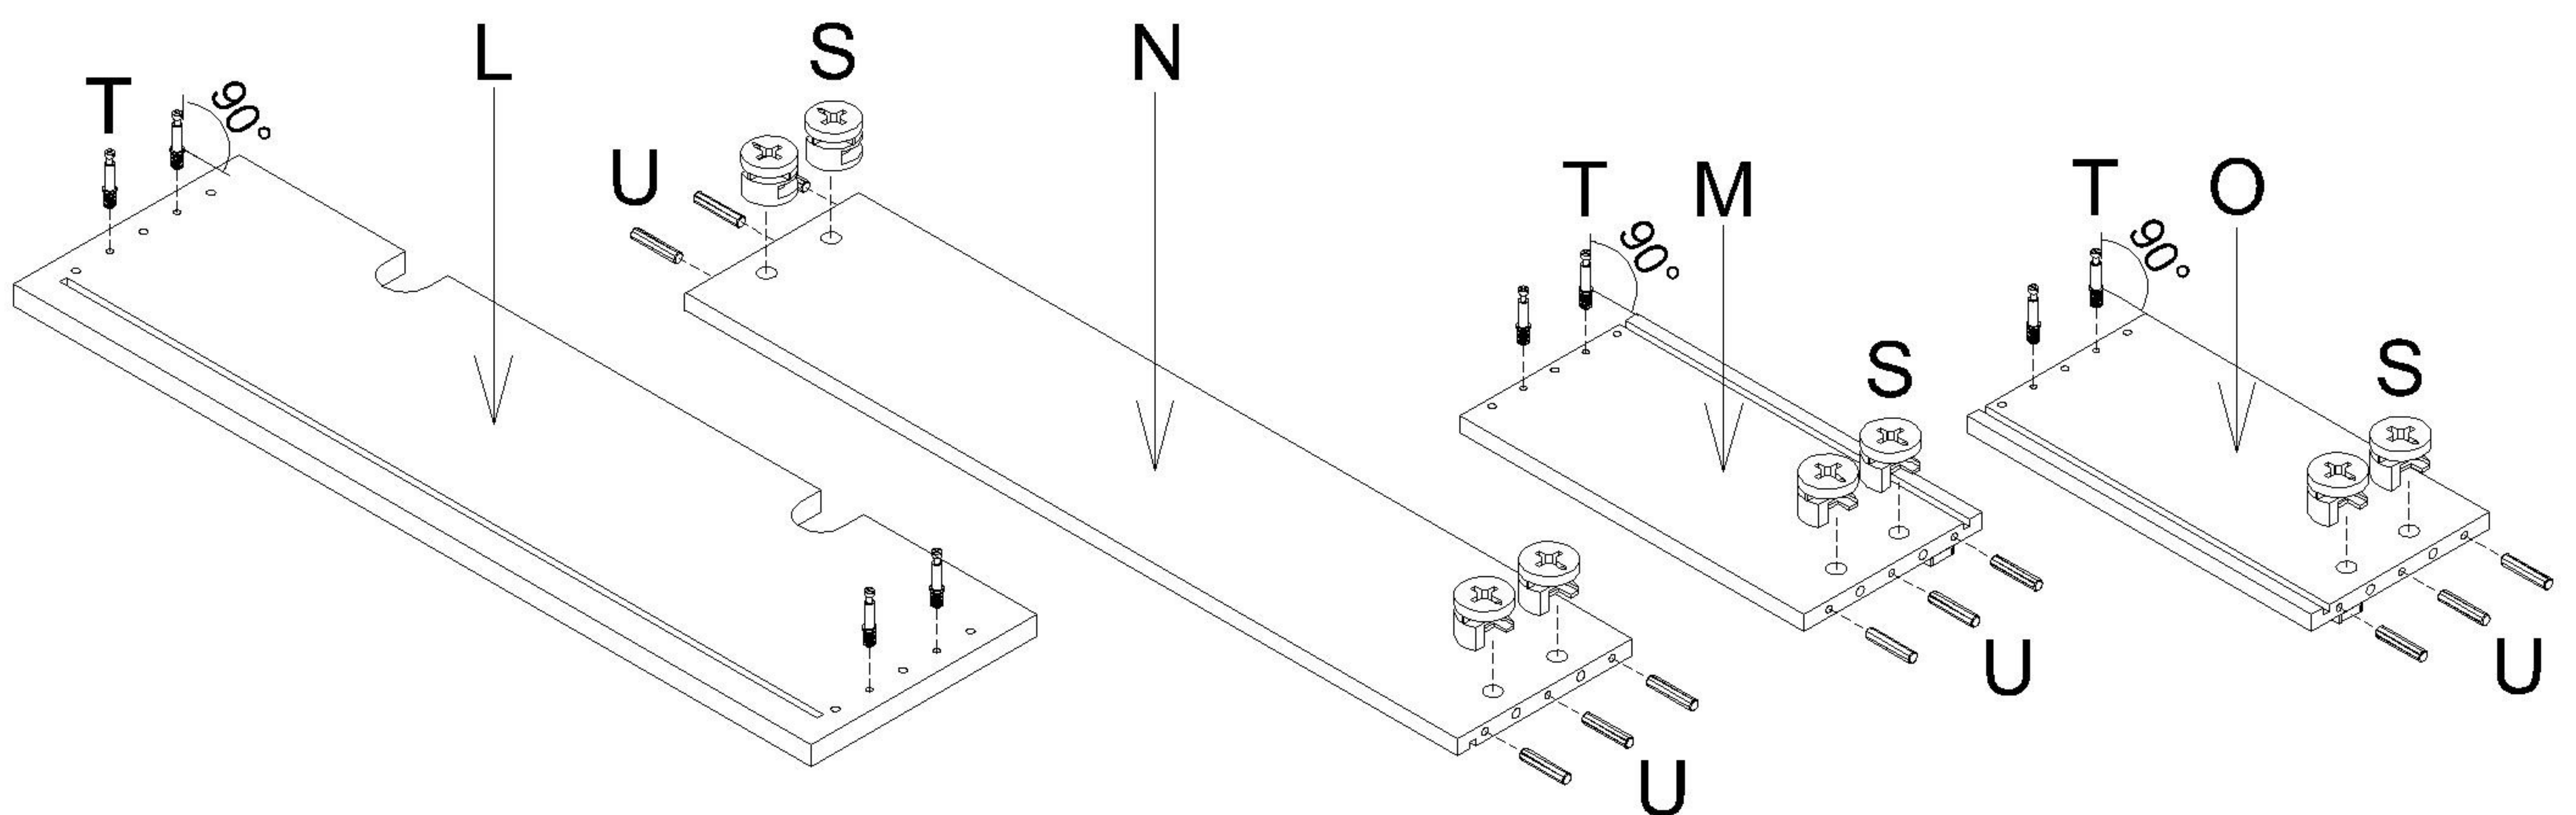


15 Attach Left & Right Big Drawer Side (M & O) to Big Drawer Back (N) and secure with Cam Lock (S). Use Cam Lock Cover (V) to cover Cam Lock (S).

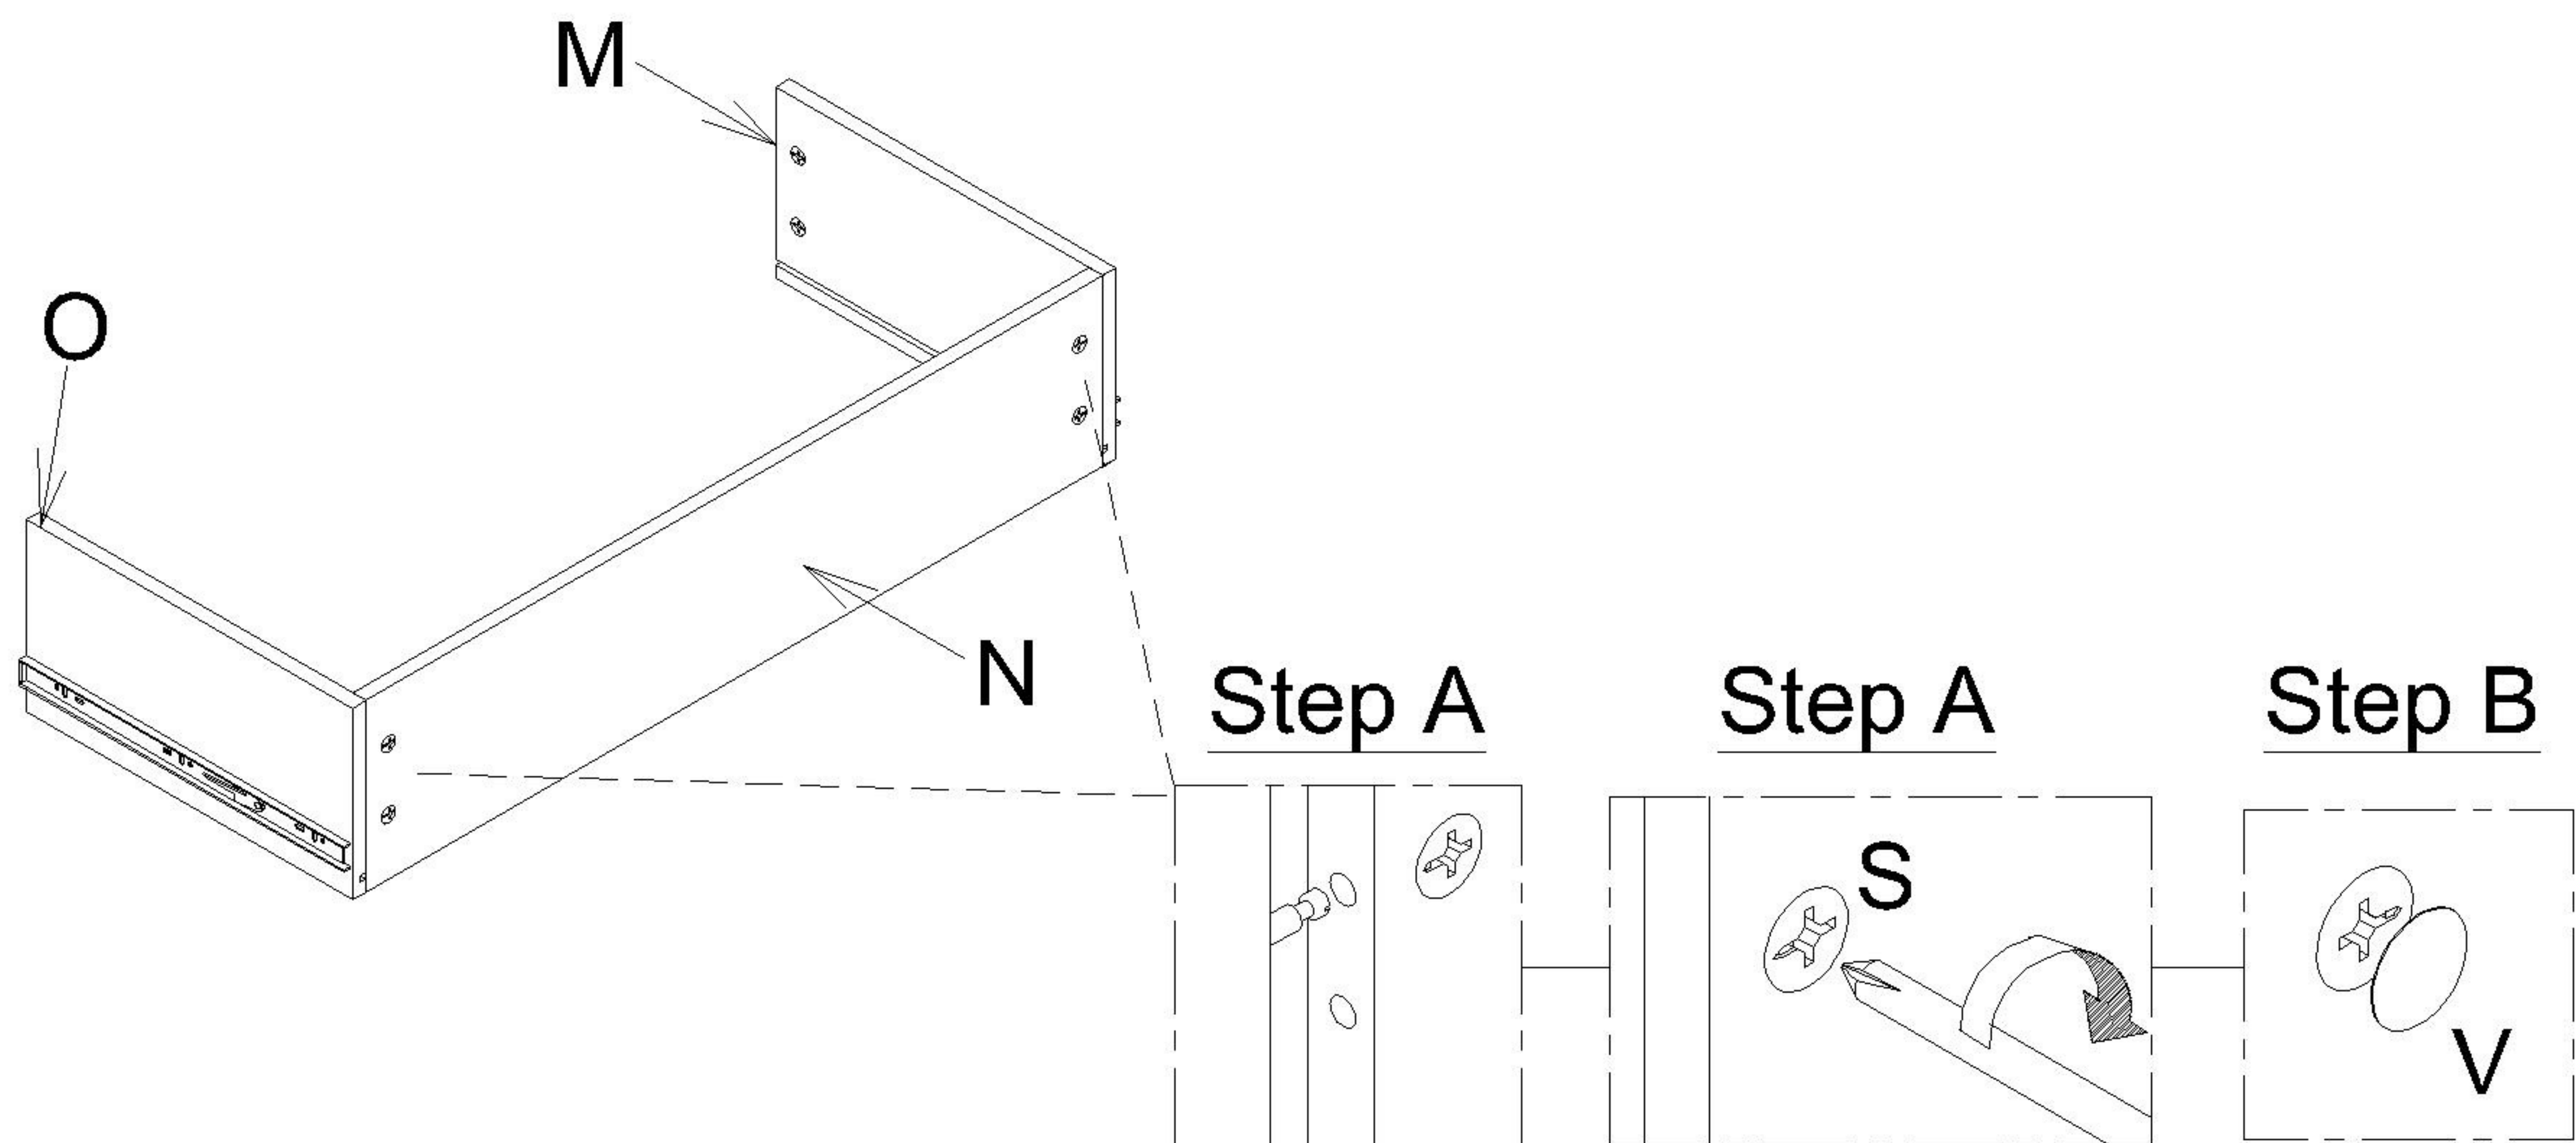


16 Slot Drawer Base (J) in corresponding grooves. Attach Big Drawer Front (L) to Drawer Box and secure with Cam Lock (S). Use Cam Lock Cover (V) to cover Cam Lock (S).

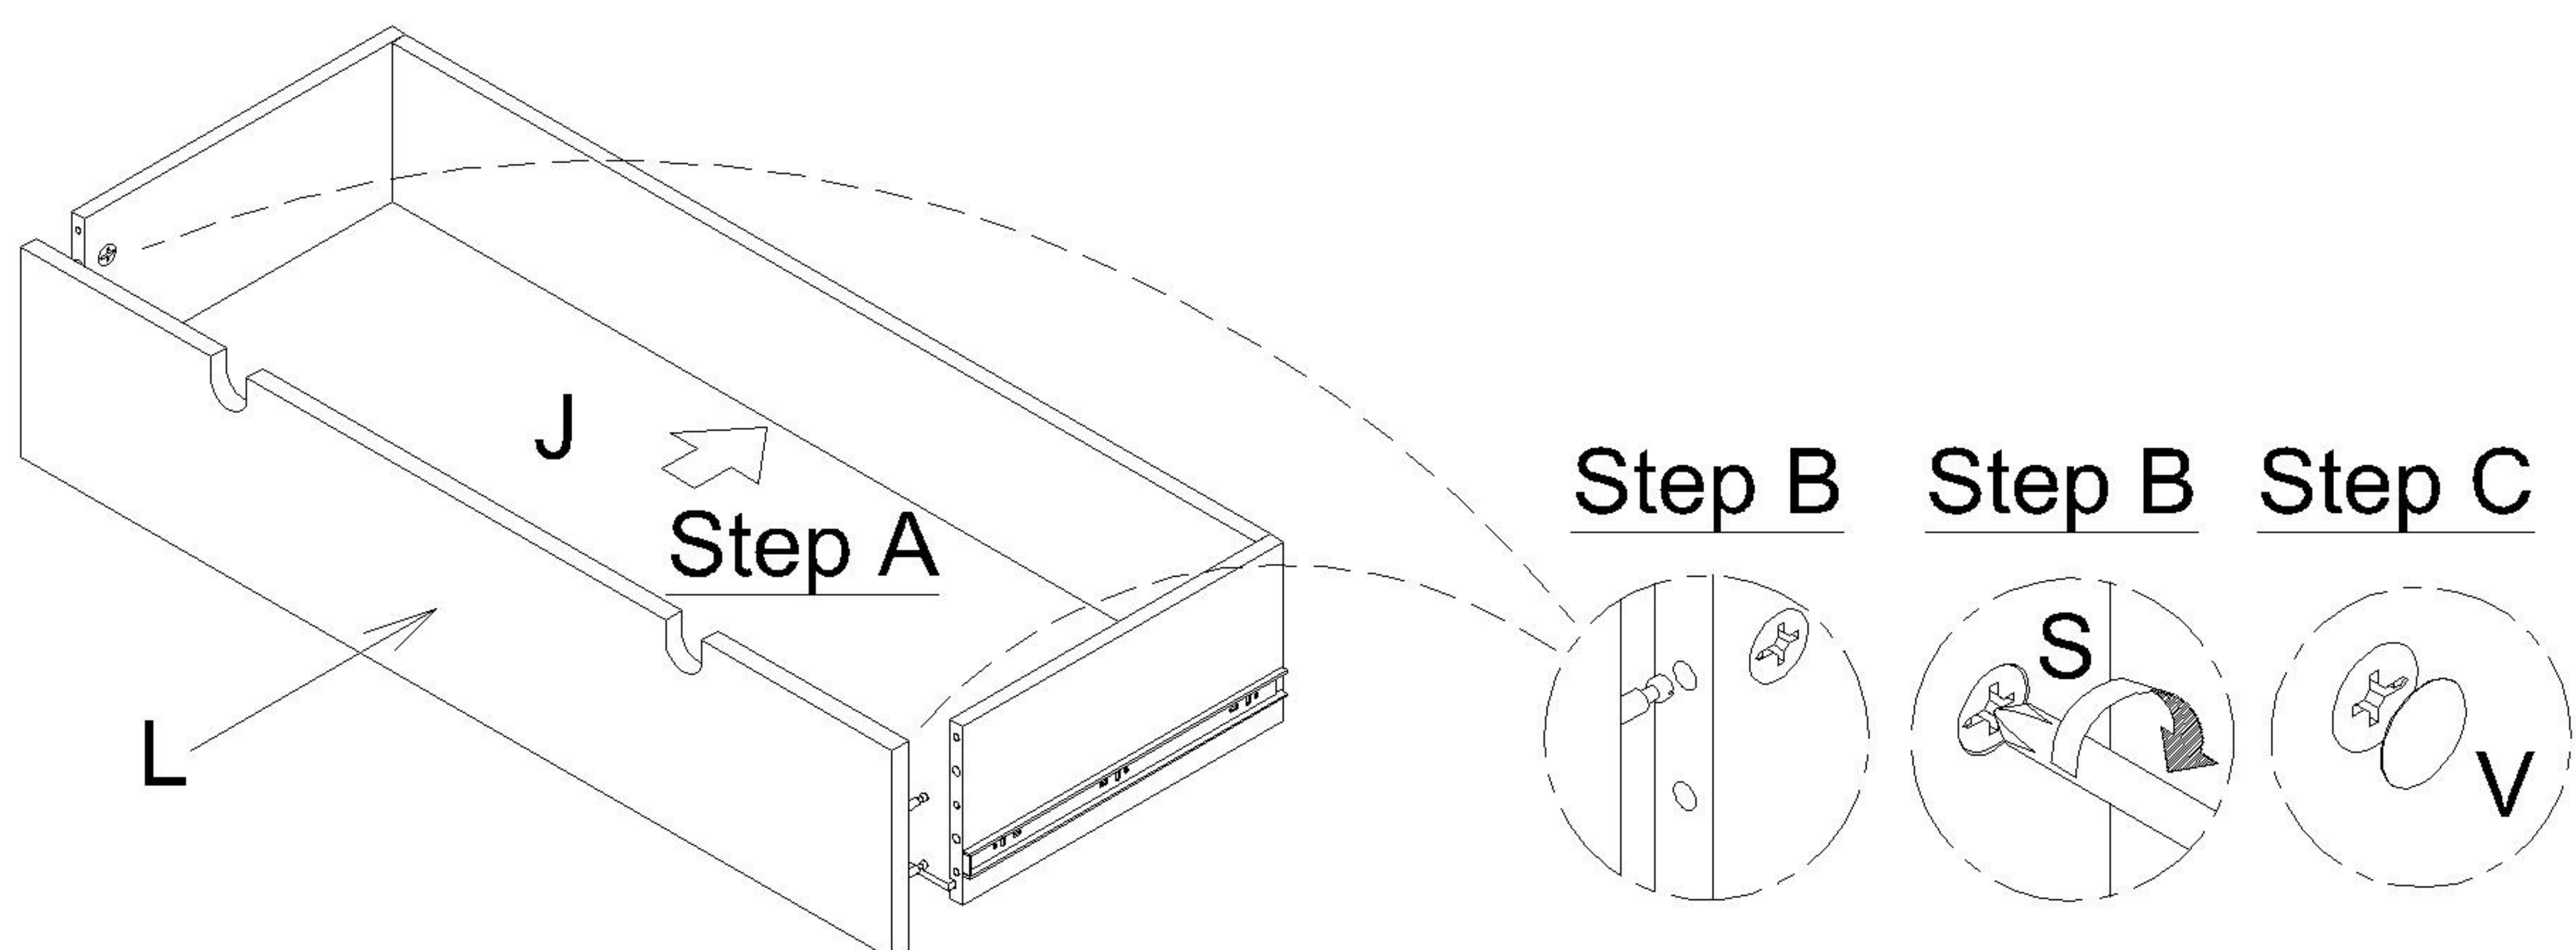

17 Slot Drawers into assembled unit.

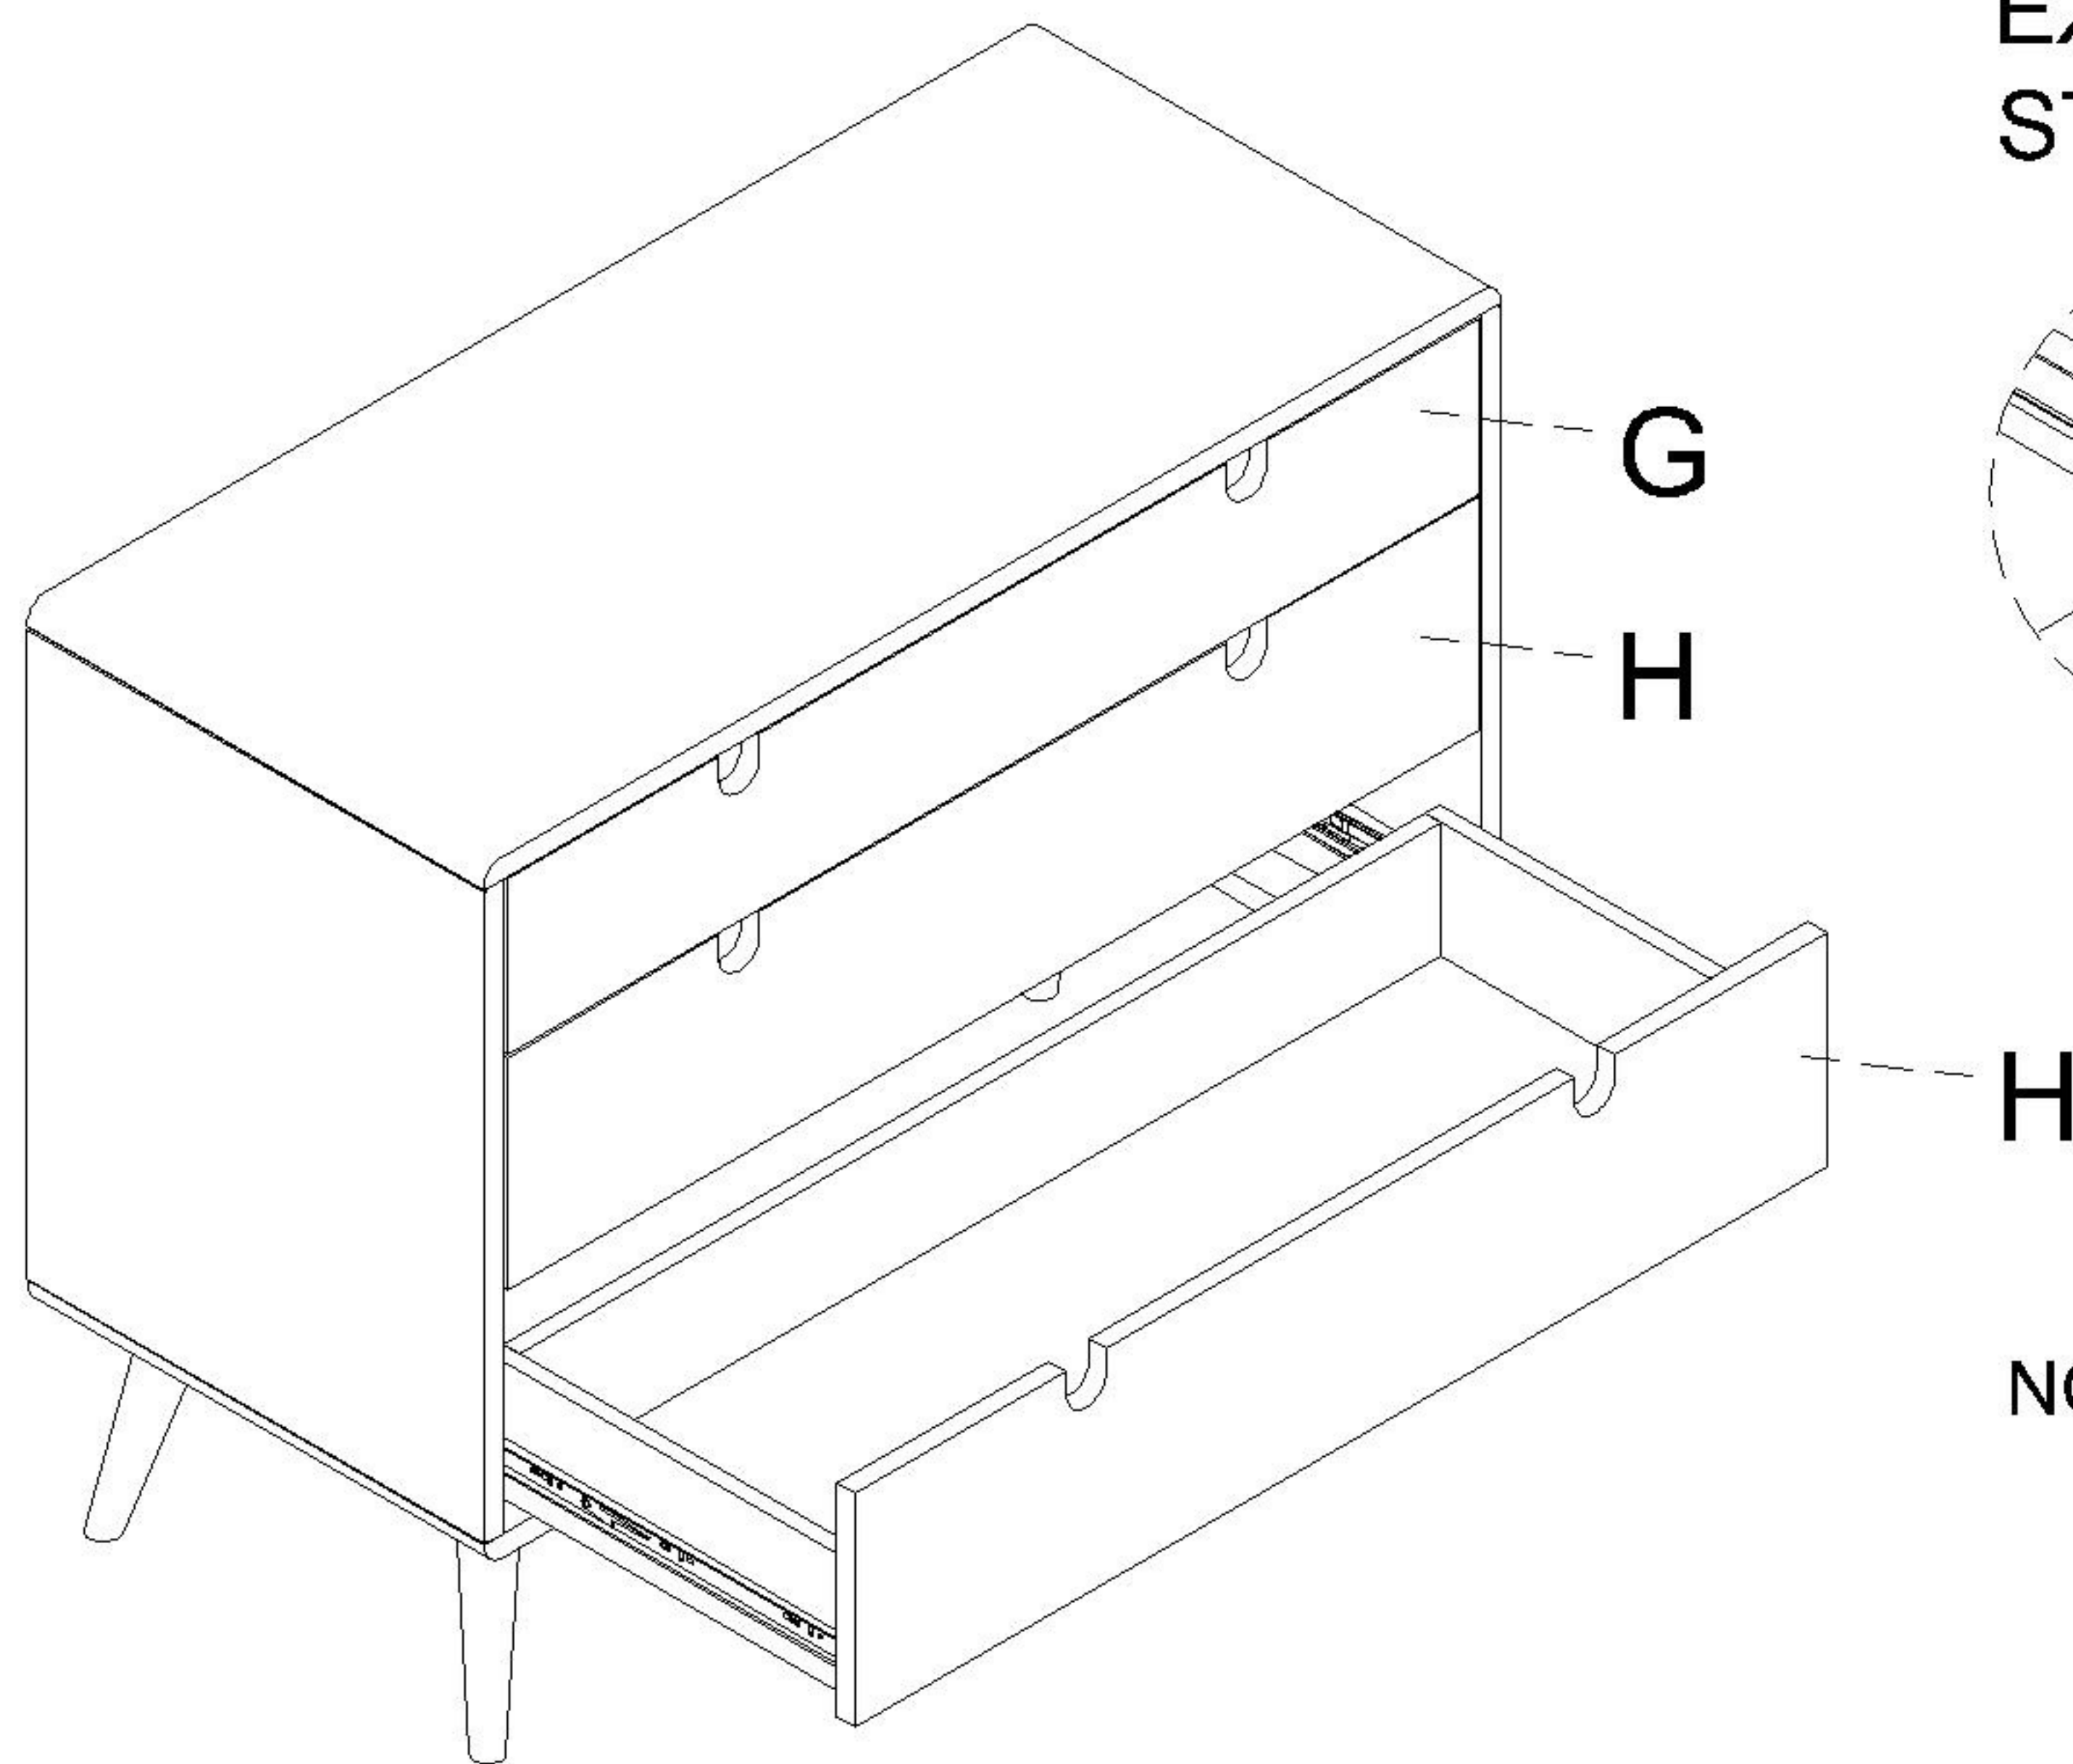


EXTENSION RUNNER ASSEMBLE STEPS:

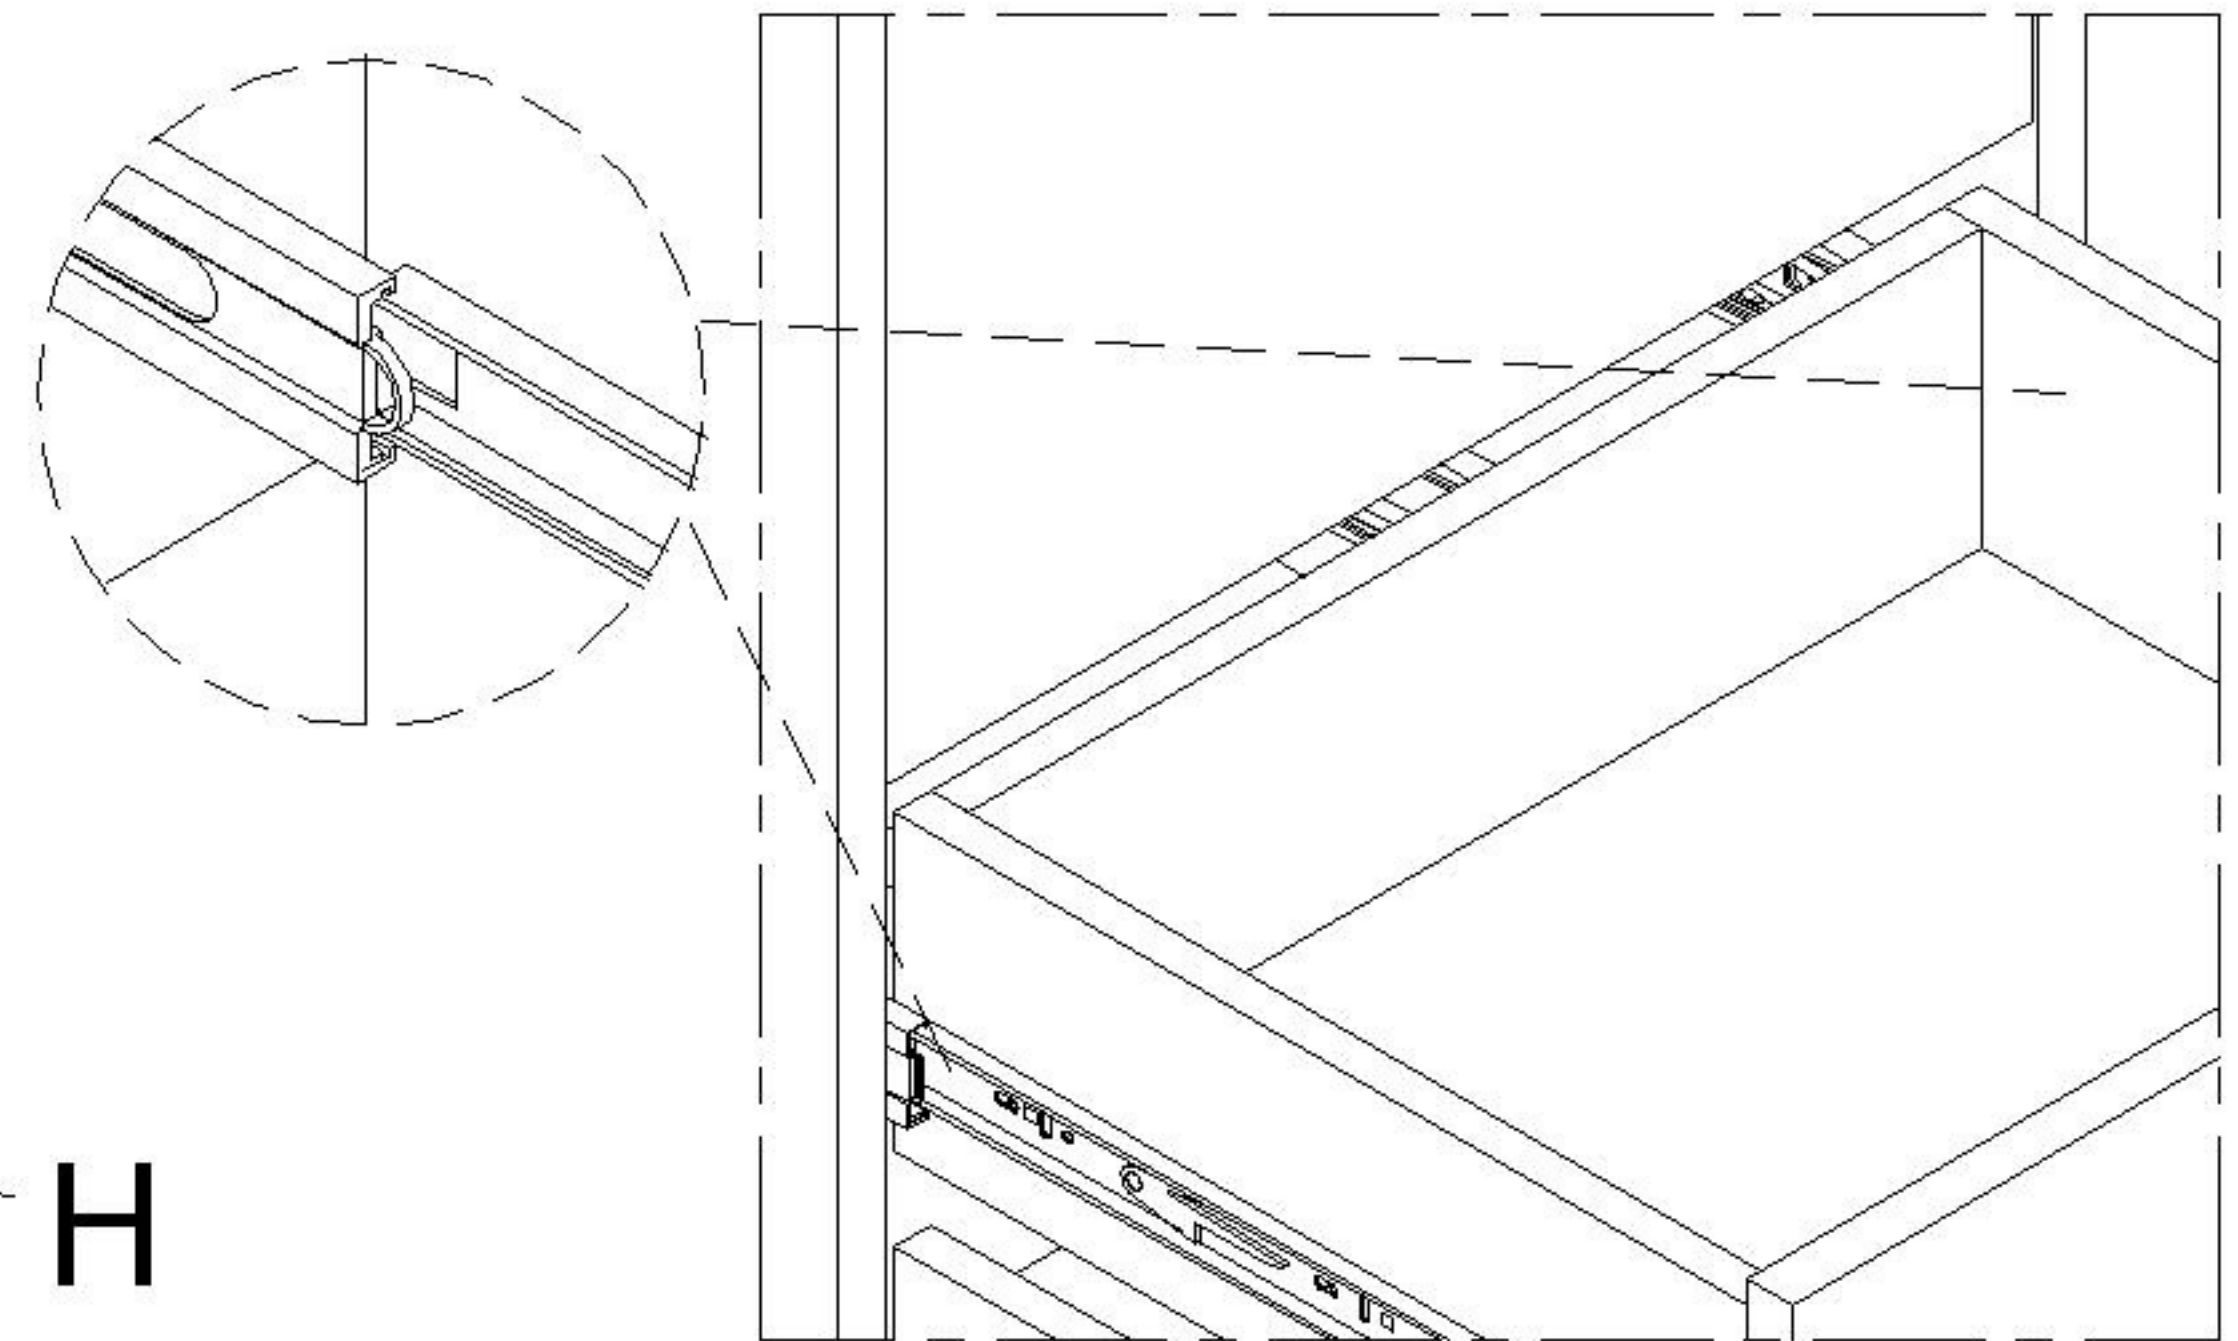

NOTE : Align and pull/push the triggers on both sides of drawer box into the metal track on interior side of side panel.

18 Attach Anti-Tipping Kit (AC) to wall. Attach Bracket (vertically) to wall using the Long Screw provided. Attach Bracket (vertically) to furniture back (directly below top) with Short Screw. Place Bracket as close to center of furniture back as possible in relation to wall stud and the desired position in the room. Move furniture to its final position. Thread the strap through Bracket, and pull it tight.

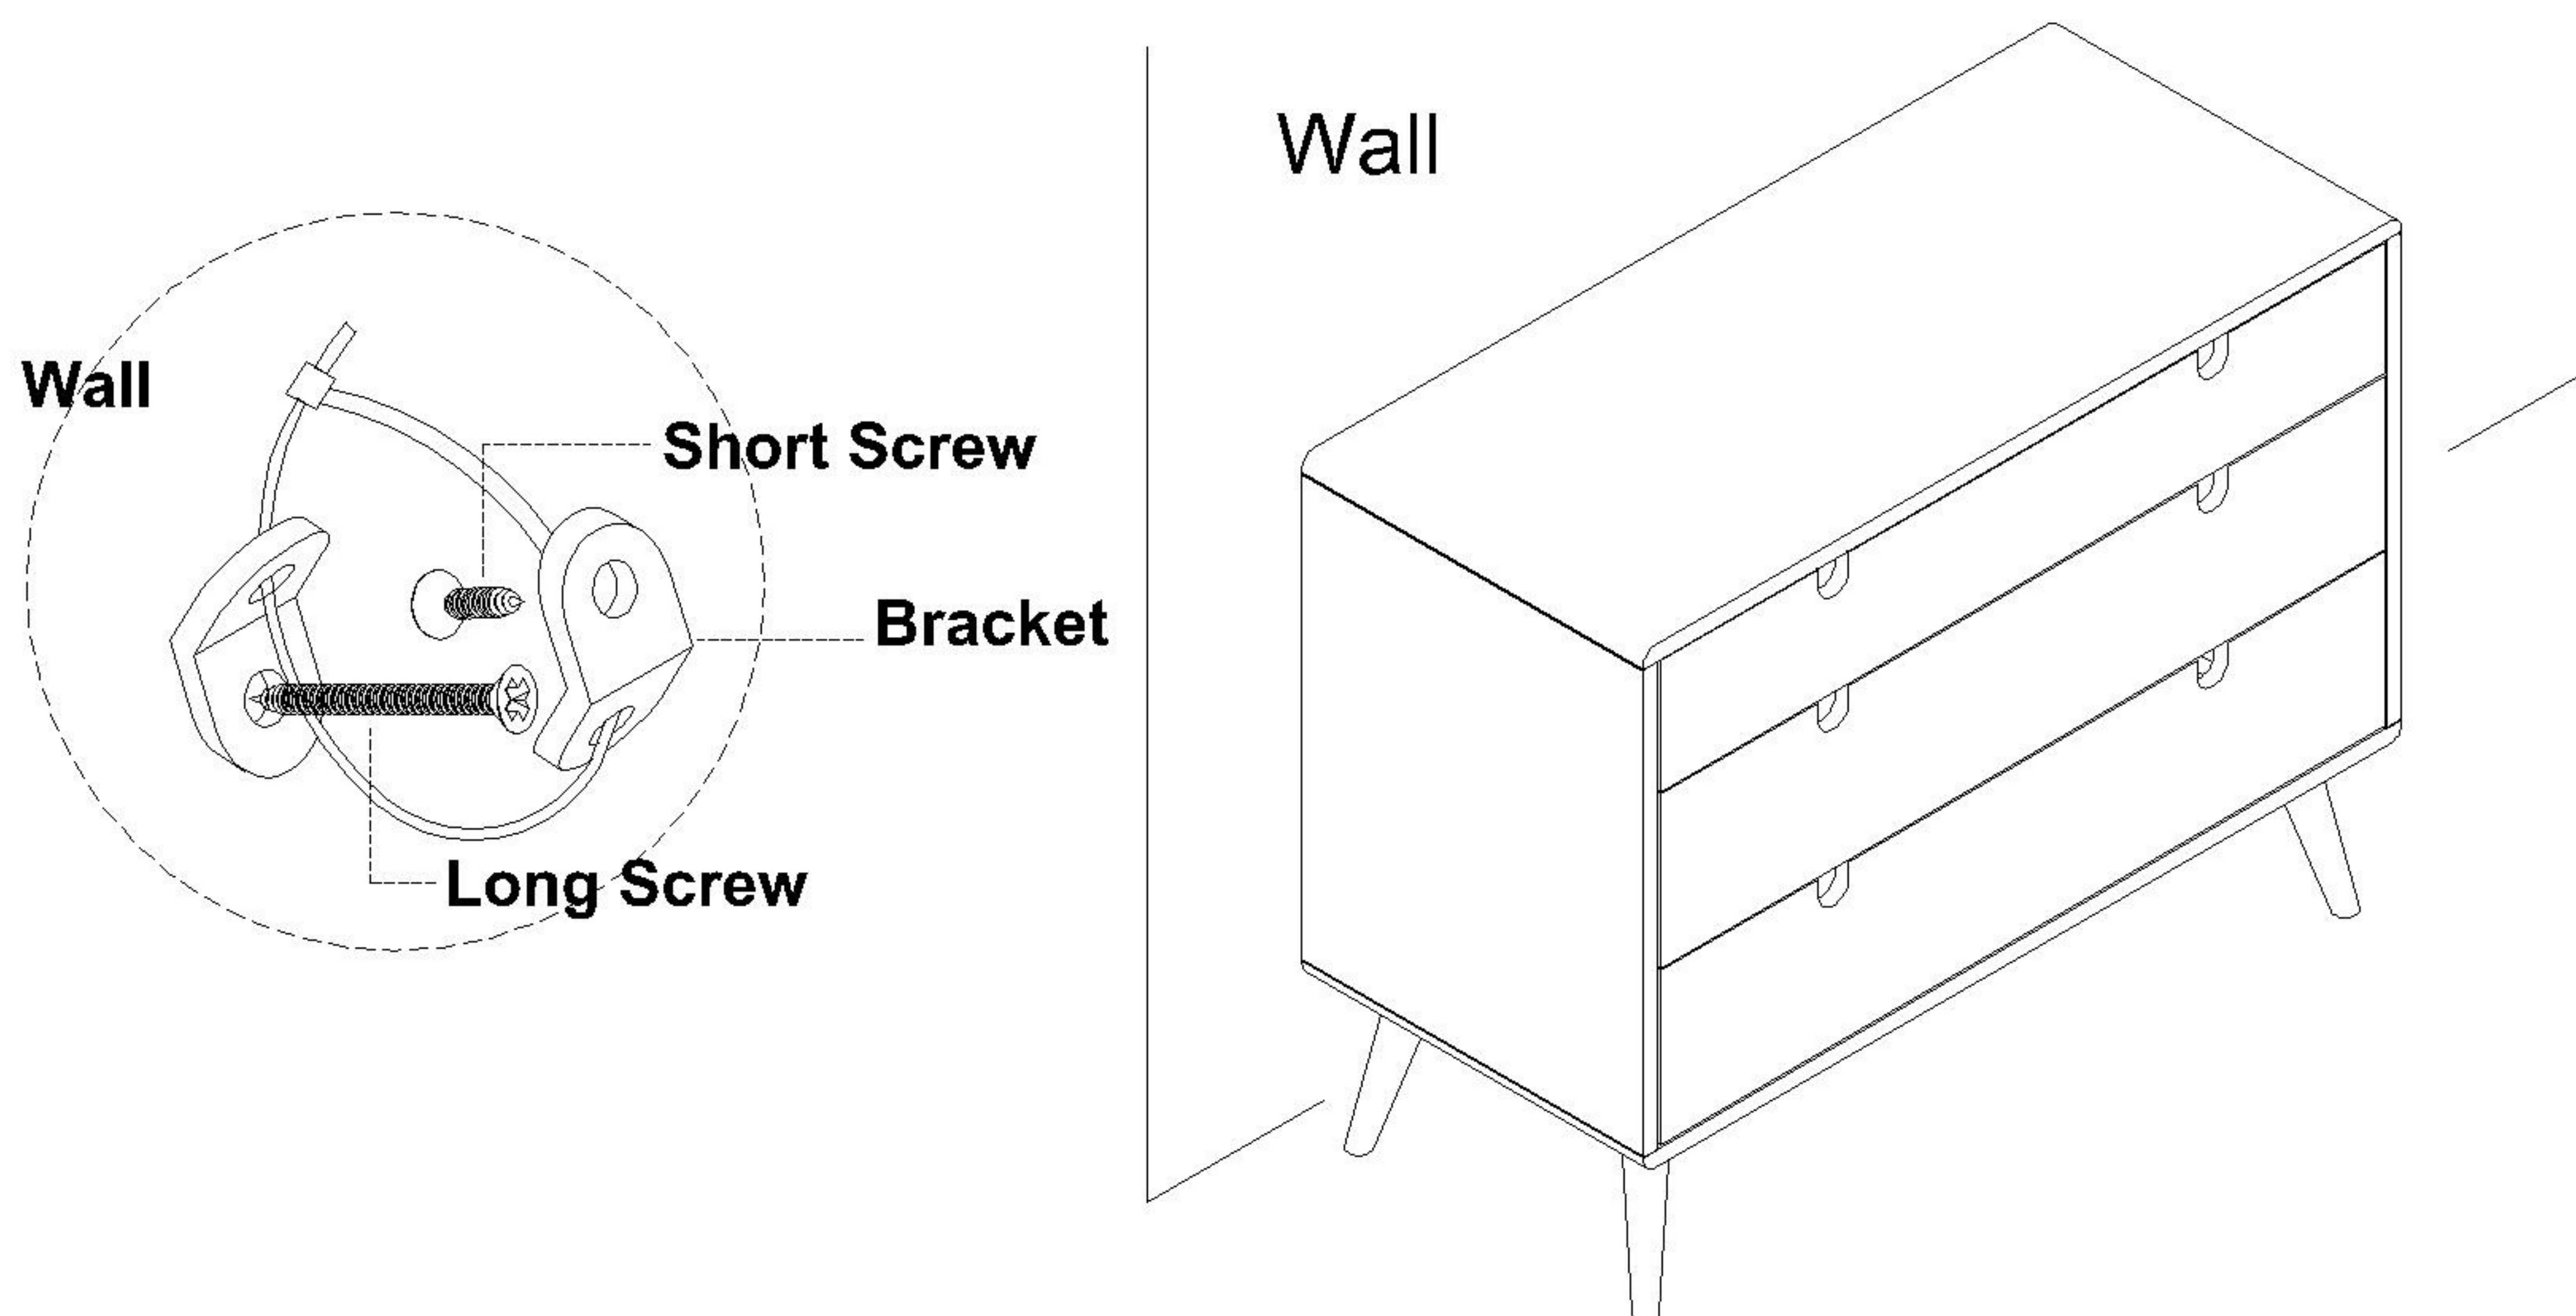

Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.