

SPECIFICATION SHEET

BPL-101


• Directional Lights

• Aluminum

Fixture Specifications:

- Housing:** Die-cast aluminum.
- Stem:** Die-cast aluminum stem, with ½ NPT hub on bottom.
- Finish:** Polyester UV powder coated, available in **BLK-Black, RST-Rust**
- Socket:** GU5.3 socket
- Lamp:** 12V, MR16 halogen bulb 20W standard, 50W Max. LED lamps available in 3W/6W/9W, with 2700K-warm white color temperature.

- Wiring:** Fixture is prewired with a 3ft 18-2 direct burial cord. Wire nuts sold separately.
- Mounting Spike:** Black 8½" ABS spike with ½" NPT male hub on top
- Electrical Notes:** A 12V transformer is required. Voltage range for 12V halogen lamps are 11V-12.5V. Voltage range for LED lamps are 8V-21V. Proper grease/lubricant is suggested on threaded parts during installation process.
- Warranty:** Limited five (5) year warranty on fixture housing and stem against manufacture's defects.

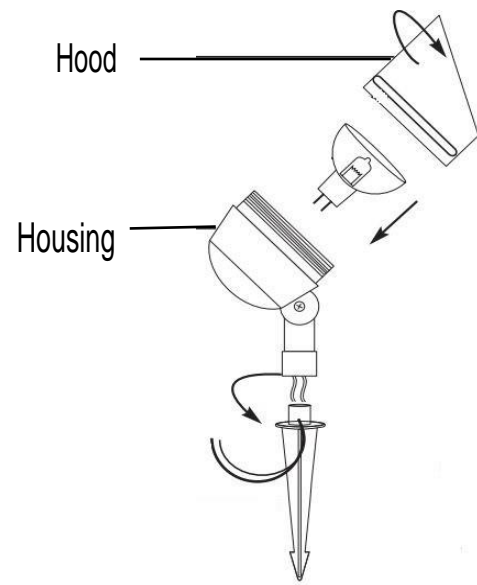

AVAILABLE LED LAMPS

| LAMP NUMBER | WATTS | BEAM | | COLOR & TEMP. | RATED HOURS | HALOGEN EQUIVALENT |
|-------------|-------|--------|-------|---------------|-------------|--------------------|
| | | SPREAD | LUMEN | | | |
| 3WMR16LED | 3 | 45° | 270 | 2700K | 50000 | 20 Watt |
| 6WMR16LED | 6 | 45° | 540 | 2700K | 50000 | 35 Watt |
| 9WMR16LED | 9 | 45° | 810 | 2700K | 50000 | 50 Watt |

AVAILABLE HALOGEN LAMPS

| LAMP NUMBER | WATTS | BEAM | | COLOR & TEMP. | RATED HOURS |
|-------------|-------|--------|-------|---------------|-------------|
| | | SPREAD | LUMEN | | |
| MR16 20W | 20 | 36° | | 2700K | 2000 |
| MR16 35W | 35 | 36° | | 2700K | 2000 |
| MR16 50W | 50 | 36° | | 2700K | 2000 |

