


Atomic Smart Fan

BFR45428

28" Ceiling Fan

SCHONBEK
Beyond

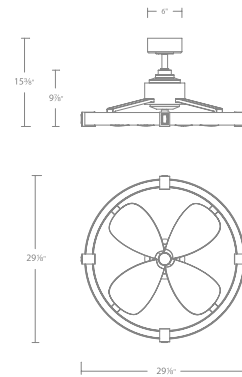

PRODUCT DESCRIPTION

Express yourself in this artistic, rotating blend of light and movement in space. The stitched black leather bands illuminate uniformly from within. In the nucleus of this dynamic piece, a trio of fan blades creates gentle breezes. A true head-turning, attention getter.


FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Includes remote control
- Optional wall control sold separately
- Compatible with Schonbek app

AIRFLOW/ENERGY EFFICIENCY

Weighted-Average/High Airflow CFM:	1261/1878
Weighted-Average/High Energy Use (W):	12/16
Estimated Yearly Energy Cost (\$):	3
Weighted-Average/High Efficiency (CFM/W):	103
Max RPM:	361

AVAILABLE FINISHES



AVAILABLE TRIM



Optic Crystal (O)

The Schonbek app synchronizes seamlessly with smart home devices you already own



schonbek.com

Phone (800) 836.1892 | Fax: (518) 563.4228

SPECIFICATIONS

Construction:	Steel Frame Black Leather, ABS blades
Blade:	16° Pitch, 23" sweep
Downrod:	.75"W x 4.5"H included
Mounting Slope:	Up to 30°
Wire:	80"
Hanging Weight:	21.6 lbs
Total Power:	41W
Standards:	UL/cUL Wet Location listed, Title 24 JA8-2016 Compliant, Title 20
Motor Type:	ZDW-50 DC Motor

WIRELESS PERFORMANCE

Wi-Fi Range:	Up to 150 ft*
Bluetooth Range:	Up to 150 ft*

LUMINAIRE PERFORMANCE

Light Source:	LED
Light Wattage:	25W
Lumens/ Delivered Lumens:	1721/1164
Dimming:	Integrated
CRI:	90
Color Temperature Selectable:	3000K, 3500K, 4000K
Rated Life:	50,000 hours

Headquarters/Eastern Distribution Center
61 Industrial Blvd, Plattsburgh, NY 12901

Atomic Smart Fan

BFR45428

28" Ceiling Fan



OPTIONAL ACCESSORIES

Bluetooth Wall Control		SF-WCBT	WT White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.
Bluetooth Remote Control		SF-RCBT	WT White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with Schonbek Smart Fans. Includes easy-to-install wall cradle and batteries.
Downrod		SFDR-12 12IN SFDR-18 18IN SFDR-24 24IN SFDR-36 36IN		All our downrods are .75 (in) and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers		SFDR-I		Connects two downrods together.
Sloped Ceiling Kit		SFCK-		Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.

Examples: Downrod: **SFDR-12-BK**

SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

NOTE: Recommended maximum downrod length of 72" with 80" lead wire